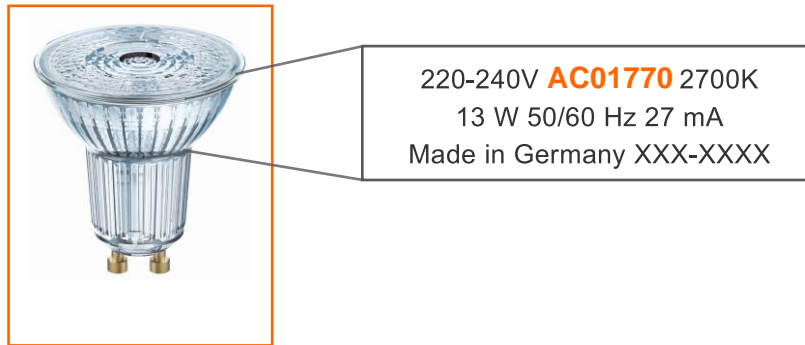


DIMMER COMPATIBILITY R50 + R63 + R80

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?









The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:



2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend						SUPERSTAR PAR16 35 36*		SUPERSTAR PAR16 50 36*		SUPERSTAR PAR16 80 36*		SUPERSTAR PAR16 80 120*	
 Good dimmability with indicated number of lamps (dimming range greater than 75%)  Limited dimmability with indicated number of lamps (dimming range smaller than 75%)  Undesired dimmability  Not tested						 EAN/Basic Code		 EAN/Basic Code		 EAN/Basic Code		 EAN/Basic Code	
Dimmer						4058075434676 / AC16509 4052899390133 / AC16509 4058075458086 / AC16509 4058075434690 / AC16511 4052899390167 / AC16511		4058075112544 / AC16512 4052899390171 / AC16512 4052899390195 / AC16514 4058075431713 / AC16514		4058075433663 / AC24603 4058075433564 / AC24603 4058075433661 / AC24605 4058075433540 / AC24605		4058075433687 / AC24609 4058075433526 / AC24609 4058075433700 / AC24611 4058075433502 / AC24611	
Brand	Model	Voltage range	Power	Type	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	
ABB	STD 50-3	230/50Hz	60-500	L	1-20	99-2%	1-18	97-1%	85-0%	87-0%	85-0%	87-0%	
Altenburger	50_3	230/50Hz			1-3	99-0%	1-20	98-0%	92-0%	92-0%	92-0%	92-0%	
AURORA	DSP 400	230/50Hz	400	L	1-11	99-0%	1-10	95-0%	89-0%	89-0%	89-0%	89-0%	
Berker	2861	230/50Hz	50-420	U	1-10	99-0%	1-20	97-0%	88-0%	88-0%	88-0%	88-0%	
Btcino	L/N/NT4411N	230/50Hz			1-9	100-0%	1-14	97-0%	93-0%	92-0%	93-0%	92-0%	
Busch-Jaeger	6513 U-102	230/50Hz	420	T	1-20	100-0%	1-20	97-3%					
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	1-4	100-9%	1-7	97-6%	94-3%	93-3%	94-3%	93-3%	
Busch-Jaeger	6526 U	230/50Hz			1-20	99-20%	1-16	98-24%					
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	1-4	99-0%	1-9	97-0%	90-0%	90-0%	90-0%	90-0%	
Domintel	DimMax 420 SL	230/50Hz	200	L/T	1-16	100-0%	1-13	97-0%	92-0%	91-0%	92-0%	91-0%	
ELKO	400GLI	230/50Hz			1-11	100-0%	1-12	97-0%	92-3%	90-0%	92-3%	90-0%	
ELKO	315GLE	230/50Hz	20-315	T	1-20	100-0%	1-20	98-0%	91-3%	90-0%	91-3%	90-0%	
ELKO	600GLE/I	230/50Hz			1-11	99-1%	1-13	98-5%	91-0%	91-0%	91-0%	91-0%	
ELKO	600GLI	230/50Hz	40-600	U	1-20	99-0%	1-20	98-0%	91-2%	91-2%	91-2%	91-2%	

Information about the lamp type

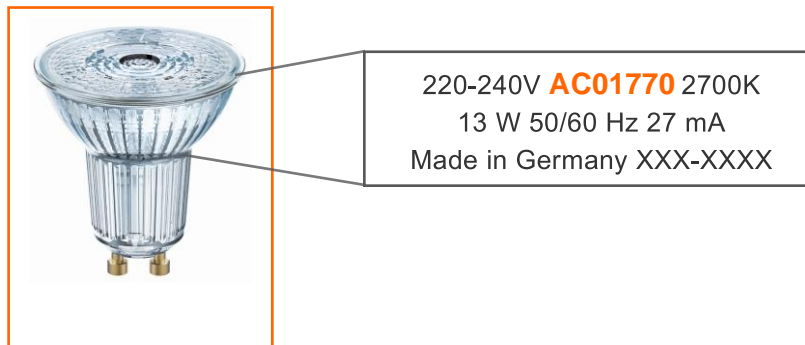
Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT PAR20 + PAR30 + PAR38

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes Dimmverhalten auftreten kann etc.








Liste der getesteten Dimmer

Legend					SUPERSTAR PAR16 35 36*		SUPERSTAR PAR16 50 36*		SUPERSTAR PAR16 80 36*		SUPERSTAR PAR16 80 120*	
Good dimmability with indicated number of lamps (dimming range greater than 75%)												
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability												
Not tested												
					EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code	
					4058075433676 / AC16509		4058075112544 / AC16512		4058075433663 / AC24603		4058075433687 / AC24609	
					4052899390133 / AC16509		4052899390171 / AC16512		4058075433554 / AC24603		4058075433526 / AC24609	
					4058075458086 / AC16509		4052899390195 / AC16514		4058075453661 / AC24605		4058075433700 / AC24611	
					4058075433690 / AC16511		4058075433713 / AC16514		4058075433540 / AC24605		4058075433502 / AC24611	
					4052899390157 / AC16511							
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
Brand	Model	Voltage range	Power	Type								
ABB	STD 50-3	230/50Hz	60-500	L	1-20	99-2%	1-18	97-1%	85-0%	87-0%	85-0%	87-0%
Altenburger	50_3	230/50Hz		L	1-3	99-0%	1-20	98-0%	92-0%	92-0%	92-0%	92-0%
AURORA	DSP 400	230/50Hz	400	L	1-11	99-0%	1-10	95-0%	89-0%	89-0%	89-0%	89-0%
Berker	2861	230/50Hz	50-420	U	1-10	99-0%	1-20	97-0%	88-0%	88-0%	88-0%	88-0%
Bticino	L/N/NT411N	230/50Hz			1-9	100-0%	1-14	97-0%	93-0%	92-0%	93-0%	92-0%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	1-20	100-0%	1-20	97-3%				
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	1-4	100-9%	1-7	97-6%	94-3%	93-3%	94-3%	93-3%
Busch-Jaeger	6526 U	230/50Hz			1-20	99-20%	1-16	98-24%				
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	1-4	99-0%	1-9	97-0%	90-0%	90-0%	90-0%	90-0%
Domintell	DimMax 420 SL	230/50Hz	200	L/T	1-16	100-0%	1-13	97-0%	92-0%	91-0%	92-0%	91-0%
ELKO	400GLI	230/50Hz			1-11	100-0%	1-12	97-0%	92-3%	90-0%	92-3%	90-0%
ELKO	315GLE	230/50Hz	20-315	T	1-20	100-0%	1-20	98-0%	91-3%	90-0%	91-3%	90-0%
ELKO	600GLE/I	230/50Hz			1-11	99-1%	1-13	98-5%	91-0%	91-0%	91-0%	91-0%
ELKO	600GLI	230/50Hz	40-600	U	1-20	99-0%	1-20	98-0%	91-2%	91-2%	91-2%	91-2%








Angaben zum Lampentyp

Bewertung der Testergebnisse im Ampelsystem. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich











DIMMER COMPATIBILITY R50 + R63 + R80

Legend					SUPERSTAR CL R50 60		LED SUPERSTAR PLUS R50 60		SUPERSTAR CL R63 60		LED SUPERSTAR PLUS R63 60		SUPERSTAR CL R80 60		LED SUPERSTAR PLUS R80 60		SUPERSTAR CL R80 100	
<div style="display: flex; justify-content: space-between;"> <div style="width: 20%; background-color: #90EE90; padding: 2px;">Good dimmability with indicated number of lamps (dimming range greater than 75%)</div> <div style="width: 20%; background-color: #FFFF00; padding: 2px;">Limited dimmability with indicated number of lamps (dimming range smaller than 75%)</div> <div style="width: 20%; background-color: #FF0000; padding: 2px;">Undesired dimmability</div> <div style="width: 20%; background-color: #FFFFFF; padding: 2px;">Not tested</div> </div>																		
					EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code	
					4058075125940 / AC32660		4058075620346 / AC35797 4058075620360 / AC35798		4058075126008 / AC32665		4058075620308 / AC35795		4058075433328 / AC32668		4058075620322 / AC35796		4058075433281 / AC32669	
Dimmer					Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	
Brand	Model	Voltage range	Power	Type	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps
ABB	STD 50-3	230/50Hz	60-500	L	58-0%	57-0%	97-5%	99-5%	58-0%	57-0%	97-5%	99-5%	58-0%	57-0%	97-5%	99-5%	86-0%	74-0%
Altenburger	50,3	230/50Hz			93-0%	92-0%	99-0%	83-0%	93-0%	92-0%	99-0%	83-0%	93-0%	92-0%	99-0%	83-0%	93-0%	92-0%
AURORA	DSP 400	230/50Hz	400	L	90-0%	89-0%	97-0%	100-0%	90-0%	89-0%	97-0%	100-0%	90-0%	89-0%	97-0%	100-0%	90-0%	89-0%
Berker	2861	230/50Hz	50-420	U	89-0%	88-0%		98-3%	89-0%	88-0%		98-3%	89-0%	88-0%		98-3%	89-0%	88-0%
Bticino	L/N/NT4411N	230/50Hz			94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%
bticino	NT4402N	230/50Hz	500	R														
Busch-Jaeger	6513 U-102	230/50Hz	420	T	95-2%	93-0%		98-0%	95-2%	93-0%		98-0%	95-2%	93-0%		98-0%		
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	95-3%	93-3%	100-51%		95-3%	93-3%	100-51%		95-3%	93-3%	100-51%		95-3%	93-3%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	50-1%	87-1%		89-0%	50-1%	87-1%		89-0%	50-1%	87-1%		89-0%	93-1%	87-1%
Busch-Jaeger	6526 U	230/50Hz				93-2%				93-2%				93-2%				
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	91-0%	90-0%	99-0%	99-0%	91-0%	90-0%	99-0%	99-0%	91-0%	90-0%	99-0%	99-0%	91-0%	90-0%
DimMax	420SL	230/50Hz	200	L/T	93-0%	91-0%	98-0%	97-0%	93-0%	91-0%	98-0%	97-0%	93-0%	91-0%	98-0%	97-0%	93-0%	91-0%
DINUY	RE EL1 LE1	230/50Hz	400	LED	92-0%	91-0%			92-0%	91-0%			92-0%	91-0%			92-0%	91-0%
Domintell	DimMax 420 SL	230/50Hz	200	L/T	93-0%	91-0%	98-0%	97-0%	93-0%	91-0%	98-0%	97-0%	93-0%	91-0%	98-0%	97-0%	93-0%	91-0%
ELKO	400GLI	230/50Hz			94-3%	91-0%	99-0%	97-0%	94-3%	91-0%	99-0%	97-0%	94-3%	91-0%	99-0%	97-0%	94-3%	91-0%
ELKO	315GLE	230/50Hz	20-315	T	92-3%	90-0%	96-5%	97-0%	92-3%	90-0%	96-5%	97-0%	92-3%	90-0%	96-5%	97-0%	92-3%	90-0%
ELKO	600GLI	230/50Hz	40-600	U	92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	99-0%	94-0%	92-2%	91-2%
ELKO	420GLE/l	230/50Hz	40-420	U	90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%		
ELKO	1000LRI	230/50Hz			88-0%	87-0%	98-0%	99-0%	88-0%	87-0%	98-0%	99-0%	88-0%	87-0%	98-0%	99-0%	88-0%	87-0%
ELKO	630GLE	230/50Hz	20-630	U	93-1%	92-1%	97-13%	97-0%	93-1%	92-1%	97-13%	97-0%	93-1%	92-1%	97-13%	97-0%	93-1%	92-1%
Eltako	EUD61NPN-UC	230/50Hz	5-400	R/L/C	90-1%	88-1%	99-0%	98-0%	90-1%	88-1%	99-0%	98-0%	90-1%	88-1%	99-0%	98-0%	90-1%	88-1%
Feller	40200.LEDxxx	230/50Hz			95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	85-5%	98-0%	95-0%	93-0%
Feller	40600.RC	230/50Hz			93-1%	92-1%	97-13%	97-0%	93-1%	92-1%	97-13%	97-0%	93-1%	92-1%	97-13%	97-0%	93-1%	92-1%
Feller	40600.RL	230/50Hz			92-0%	91-0%	99-0%	94-0%	92-0%	91-0%	99-0%	94-0%	92-0%	91-0%	99-0%	94-0%	92-0%	91-0%
Feller	40420.RLC	230/50Hz			90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%		
Feller	31000	230/50Hz			88-0%	87-0%	98-0%	99-0%	88-0%	87-0%	98-0%	99-0%	88-0%	87-0%	98-0%	99-0%	88-0%	87-0%
Gira	226200	230/50Hz			91-0%	89-0%	99-0%	97-0%	91-0%	89-0%	99-0%	97-0%	91-0%	89-0%	99-0%	97-0%	91-0%	89-0%
Gira	030700	230/50Hz	20-525	T	90-0%	89-0%	86-2%	98-0%	90-0%	89-0%	86-2%	98-0%	90-0%	89-0%	86-2%	98-0%	90-0%	89-0%
Gira	117600	230/50Hz	50-420	U				99-3%				99-3%				99-3%		
Gira	217400	230/50Hz	4X20-250	KNX-U	91-25%	90-24%	100-0%	99-0%	91-25%	90-24%	100-0%	99-0%	91-25%	90-24%	100-0%	99-0%	91-25%	90-24%

DIMMER COMPATIBILITY R50 + R63 + R80

Legend					SUPERSTAR CL R50 60		LED SUPERSTAR PLUS R50 60		SUPERSTAR CL R63 60		LED SUPERSTAR PLUS R63 60		SUPERSTAR CL R80 60		LED SUPERSTAR PLUS R80 60		SUPERSTAR CL R80 100			
Good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code			
Undesired dimmability					4058075125940 / AC32660		4058075620346 / AC35797 4058075620360 / AC35798		4058075126008 / AC32665		4058075620308 / AC35795		4058075433328 / AC32668		4058075620322 / AC35796		4058075433281 / AC32669			
Not tested					Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps	
Brand	Model	Voltage range	Power	Type	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps		
Hager	WUD87	230/50Hz	400	LED-U	93-0%	91-0%	100-0%	99-0%	93-0%	91-0%	100-0%	99-0%	93-0%	91-0%	100-0%	99-0%	93-0%	91-0%		
Hamilton	KP1X40	230/50Hz	400				99-94%				99-94%				99-94%					
Hugo Müller	paladin 872110 led	230/50Hz			92-0%	91-0%			92-0%	91-0%			92-0%	91-0%			92-0%	91-0%		
Jung	225 NVDE	230/50Hz	20-500	L	91-0%	89-0%	99-0%	97-0%	91-0%	89-0%	99-0%	97-0%	91-0%	89-0%	99-0%	97-0%	91-0%	89-0%		
Jung	225 TDE	230/50Hz			90-0%	89-0%	86-2%	98-0%	90-0%	89-0%	86-2%	98-0%	90-0%	89-0%	86-2%	98-0%	90-0%	89-0%		
Jung	254 UDIE1	230/50Hz						99-3%				99-3%				99-3%				
Jung	1224 LEDUDE	230/50Hz		LED	86-6%	85-5%			86-6%	85-5%			86-6%	85-5%				88-5%		
Jung	3904 REGHE	230/50Hz			91-25%	90-24%	100-0%	99-0%	91-25%	90-24%	100-0%	99-0%	91-25%	90-24%	100-0%	99-0%	91-25%	90-24%		
Legrand	665114	230/50Hz	400	U	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%		
Legrand	574319/574339	230/50Hz	400	U	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%		
Legrand	572239/572739	230/50Hz	400	U	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%		
Legrand	078407/079207	230/50Hz	400	U	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%		
Legrand	048869/048871	230/50Hz	400	U	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%		
Legrand	067083/048869	230/50Hz	400	U	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%	99-0%	98-0%	94-0%	93-0%		
Legrand	099314	230/50Hz	300	RL	67-2%	66-2%			67-2%	66-2%			67-2%	66-2%			67-2%	66-2%		
Legrand	770062	230/50Hz	400	RLC	61-1%	60-1%	98-0%	98-0%	61-1%	60-1%	98-0%	98-0%	61-1%	60-1%	98-0%	98-0%	83-1%	86-1%		
MASTER	DM-DGL	230/50Hz	1000	U / LED	89-37%	87-35%	99-52%		89-37%	87-35%	99-52%		89-37%	87-35%	99-52%					
MASTER	DM-2500	230/50Hz	2500	U / LED	86-0%	85-0%	100-0%	98-0%	86-0%	85-0%	100-0%	98-0%	86-0%	85-0%	100-0%	98-0%				
Merten	MEG5136-0000	230/50Hz			92-3%	90-0%	96-5%	97-0%	92-3%	90-0%	96-5%	97-0%	92-3%	90-0%	96-5%	97-0%	92-3%	90-0%		
Merten	MEG5134-0000	230/50Hz			95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	85-5%	98-0%	95-0%	93-0%		
Merten	MEG5137-0000	230/50Hz			93-1%	92-1%	97-13%	97-0%	93-1%	92-1%	97-13%	97-0%	93-1%	92-1%	97-13%	97-0%	93-1%	92-1%		
Merten	MEG5133-0000	230/50Hz			92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	99-0%	94-0%	92-2%	91-2%		
Merten	MEG5138-0000	230/50Hz			90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%				
Merten	MEG 5170-0300	230/50Hz	10-200	U	91-0%	89-0%			91-0%	89-0%			91-0%	89-0%			91-0%	89-0%		
Merten	MEG 5131	230/50Hz	40-400	L	95-0%		100-0%	99-0%	95-0%		100-0%	99-0%	95-0%		100-0%	99-0%	95-0%	94-0%		
Merten	MEG 5132	230/50Hz			95-0%		100-0%	99-0%	95-0%		100-0%	99-0%	95-0%		100-0%	99-0%	95-0%	94-0%		
Merten	MEG 5140	230/50Hz	9-100	L	93-0%	91-0%	100-0%	99-0%	93-0%	91-0%	100-0%	99-0%	93-0%	91-0%	100-0%	99-0%	93-0%	91-0%		
Merten	MEG 5135	230/50Hz	60-1000	L	88-0%	87-0%	98-0%	99-0%	88-0%	87-0%	98-0%	99-0%	88-0%	87-0%	98-0%	99-0%	88-0%	87-0%		
MK	K4501	230/50Hz	180	L	89-1%	87-1%	99-0%	99-0%	89-1%	87-1%	99-0%	99-0%	89-1%	87-1%	99-0%	99-0%	89-1%	87-6%		
NEXUS	881P-01	230/50Hz	400	L	93-1%	92-1%	99-0%	99-0%	93-1%	92-1%	99-0%	99-0%	93-1%	92-1%	99-0%	99-0%	93-1%	92-1%		

DIMMER COMPATIBILITY R50 + R63 + R80

Legend						SUPERSTAR CL R50 60		LED SUPERSTAR PLUS R50 60		SUPERSTAR CL R63 60		LED SUPERSTAR PLUS R63 60		SUPERSTAR CL R80 60		LED SUPERSTAR PLUS R80 60		SUPERSTAR CL R80 100					
<div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"></div> <div style="width: 30%;"></div> <div style="width: 30%;"></div> </div> <p>Good dimmability with indicated number of lamps (dimming range greater than 75%)</p> <p>Limited dimmability with indicated number of lamps (dimming range smaller than 75%)</p> <p>Undesired dimmability</p> <p>Not tested</p>																							
						EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code			
						4058075125940 / AC32660		4058075620346 / AC35797 4058075620360 / AC35798		4058075126008 / AC32665		4058075620308 / AC35795		4058075433328 / AC32668		4058075620322 / AC35796		4058075433281 / AC32669					
Dimmer						Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range	Dimming range				
Brand	Model	Voltage range	Power	Type	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps			
NIKO	310-01900	230/50Hz	5-200	U	95-0%	93-0%	99-0%	98-0%	95-0%	93-0%	99-0%	98-0%	95-0%	93-0%	99-0%	98-0%	95-0%	93-0%	95-0%	93-0%			
NIKO	330-00700	230/50Hz	5-200	U	93-0%	92-0%	100-0%	98-0%	93-0%	92-0%	100-0%	98-0%	93-0%	92-0%	100-0%	98-0%	93-0%	92-0%	93-0%	92-0%			
Odace	S520512	230/50Hz			95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	95-0%	93-0%			
Odace	S520511	230/50Hz			92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	92-2%	91-2%			
Odace	S520515	230/50Hz			90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%							
Odace	S520518	230/50Hz			93-0%	91-0%	100-0%	99-0%	93-0%	91-0%	100-0%	99-0%	93-0%	91-0%	100-0%	99-0%			93-0%	91-0%			
Osram	HTI DALI 315 DIM	230/50Hz	20-315	DALI-T	96-0%	94-0%	98-0%	98-0%	96-0%	94-0%	98-0%	98-0%	96-0%	94-0%	98-0%	98-0%	96-0%	94-0%	96-0%	94-0%			
PEHA	435 HAN	230/50Hz	60-600	L	92-0%	91-0%	100-0%	100-0%	92-0%	91-0%	100-0%	100-0%	92-0%	91-0%	100-0%	100-0%	92-0%	91-0%	92-0%	91-0%			
Schneider	400GLI	230/50Hz	40-400	T	94-3%	91-0%	99-0%	97-0%	94-3%	91-0%	99-0%	97-0%	94-3%	91-0%	99-0%	97-0%	94-3%	91-0%	94-3%	91-0%			
Schneider	SBD315RC	230/50Hz			92-3%	90-0%	96-5%	97-0%	92-3%	90-0%	96-5%	97-0%	92-3%	90-0%	96-5%	97-0%	92-3%	90-0%	92-3%	90-0%			
Schneider	SBD200LED	230/50Hz	400		95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	85-5%	98-0%	95-0%	93-0%	95-0%	93-0%			
Schneider	SBD630RC	230/50Hz			93-1%	92-1%	97-13%	97-0%	93-1%	92-1%	97-13%	97-0%	93-1%	92-1%	97-13%	97-0%	93-1%	92-1%	93-1%	92-1%			
Schneider	SBD600RL	230/50Hz			92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	99-0%	94-0%	92-2%	91-2%	92-2%	91-2%			
Schneider	SBD420RCRL	230/50Hz			90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%	90-1%	89-0%	100-0%	99-0%							
Schneider	5170	230/50Hz			91-0%	89-0%			91-0%	89-0%			91-0%	89-0%					91-0%	89-0%			
Schneider	SBD400RL	230/50Hz			95-0%		100-0%	99-0%	95-0%		100-0%	99-0%	95-0%		100-0%	99-0%	95-0%		95-0%	94-0%			
Schneider	SBD5PL	230/50Hz			93-0%	91-0%	100-0%	99-0%	93-0%	91-0%	100-0%	99-0%	93-0%	91-0%	100-0%	99-0%	93-0%	91-0%	93-0%	91-0%			
Schneider	ATTD1000RL	230/50Hz			88-0%	87-0%	98-0%	99-0%	88-0%	87-0%	98-0%	99-0%	88-0%	87-0%	98-0%	99-0%	88-0%	87-0%	88-0%	87-0%			
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	93-0%	92-0%	99-0%	99-0%	93-0%	92-0%	99-0%	99-0%	93-0%	92-0%	99-0%	99-0%	93-0%	92-0%	93-0%	92-0%			
Siemens	5TC8 284	230/50Hz	20-525	T	88-0%	87-0%		98-0%	88-0%	87-0%		98-0%	88-0%	87-0%		98-0%	88-0%	87-0%	88-0%	87-0%			
Siemens	5WG1-527-1AB31	230/50Hz	20-500	KNX-U	86-0%	85-0%			86-0%	85-0%			86-0%	85-0%			86-0%	85-0%	86-0%	85-0%			
theben	DIMAX 544 plus P	230/50Hz	250	T			100-17%	100-9%			100-17%	100-9%			100-17%	100-9%							
theben	DIMAX 534 plus	230/50Hz	400	T																			
VADSBO	LD 220	230/50Hz	1-200	U	90-1%	89-1%	99-0%	98-0%	90-1%	89-1%	99-0%	98-0%	90-1%	89-1%	99-0%	98-0%	90-1%	89-1%	90-1%	89-1%			
VARILIGHT	HQ3W	230/50Hz	400		66-0%	65-0%	63-0%	99-0%	66-0%	65-0%	63-0%	99-0%	66-0%	65-0%	63-0%	99-0%	66-0%	65-0%	66-0%	65-0%			
VARILIGHT	JQP401W	230/50Hz	400	T		87-3%		100-0%		87-3%		100-0%		87-3%		100-0%		87-3%		87-3%			
Vimar	20135	230/50Hz	3 - 100	U	86-1%	85-1%	99-0%	98-0%	86-1%	85-1%	99-0%	98-0%	86-1%	85-1%	99-0%	98-0%	86-1%	85-1%	86-1%	85-1%			
ZANO	WH401	230/50Hz	400	L	61-3%	61-3%		97-0%	61-3%	61-3%		97-0%	61-3%	61-3%		97-0%	61-3%	61-3%	61-3%	61-3%			
ZANO	WH251	230/50Hz	250					96-0%				96-0%				96-0%				53-0%			
ZANO	Z GRID 700	230/50Hz	250	LED		63-0%	99-0%	100-0%		63-0%	99-0%	100-0%		63-0%	99-0%	100-0%							
ZANO	Z GRID 500	230/50Hz	500		90-0%	89-0%	99-0%	99-0%	90-0%	89-0%	99-0%	99-0%	90-0%	89-0%	99-0%	99-0%	90-0%	89-0%	90-0%	89-0%			

Please note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types.
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonic or electronic resonance).
- Subject to change without notice.
- Errors and omission excepted.
- Always make sure to use the most recent release.

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

LEDVANCE GmbH

Head Office:

Parkring 33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmerergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.