


## DIMMER COMPATIBILITY CLASSIC B

### BASIC INFORMATION:

#### 1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

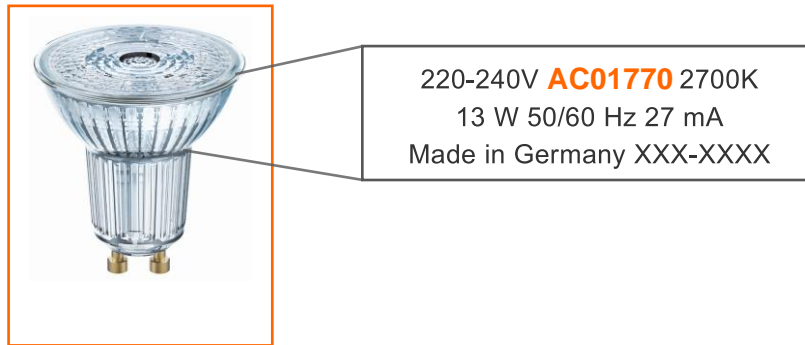

#### 2. HOW CAN I READ THE FOLLOWING CHARTS?

**Legend:**  
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36°				SUPERSTAR PAR16 50 36°				SUPERSTAR PAR16 80 36°				SUPERSTAR PAR16 80 120°			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																				
Undesired dimmability																				
Not relevant																				
Not tested																				
EAN/Basic Code					4052839330153/AC01184				4052839330171/AC01187				4052839330218/AB41905				4058075036889/AC03043			
EAN/Basic Code					4052839330157/AC01182				4052839330195/AC01184				4052839330232/AB41906				4058075036825/AC03051			
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range	
Brand	Model	Voltage range	Power	Type	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%
ABB	STD 50-3	230/50Hz	60-500	L	1-10	98% - 15%	2-10	97% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-20	98% - 27%	1-20	98% - 26%	1-20	97% - 27%	1-20	97% - 27%
Altenburger Electronic	50_30	230/50Hz	15-350	T	1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%	2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%
ALPORA	DSP 400	230/50Hz	400	L	3-19	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%	2-20	99% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%
Berker	2861	230/50Hz	50-420	U	1-10	96% - 22%	1-10	97% - 26%	1-10	97% - 15%	1-9	97% - 15%	1-10	98% - 1%	2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%
Blicino	L/NNT441N	230/50Hz			1-13	98% - 34%	1-10	97% - 35%	1-5	97% - 23%	1-5	97% - 23%	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
Blicino	L/NNT4408	230/50Hz			2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-20	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%
Blicino	NT4402N	230/50Hz	500	R	1-11	98% - 1%	1-10	99% - 1%	1-5	99% - 7%	1-5	99% - 7%	1-10	98% - 1%	1-10	99% - 1%	1-5	99% - 7%	1-5	99% - 7%
Busch-Jaeger	6513 U-102	230/50Hz	40-420	T	1-10	98% - 1%	1-10	97% - 26%	1-4	97% - 1%	1-4	97% - 1%	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%
Busch-Jaeger	6523 U-102	230/50Hz	420	T	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-20	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%								
Busch-Jaeger	6526 U	230/50Hz																		
Busch-Jaeger	2247 U-500	230/50Hz																		
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	L																
DINUY	RE EL1LE1	230/50Hz	400	LED																
ELKO	400GLI	230/50Hz																		
ELKO	315GLE	230/50Hz	20-315	T																
ELKO	600GLI	230/50Hz	40-600	U																
ELKO	420GLEI	230/50Hz	40-420	U																

Information about the LEDVANCE lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

## DIMMER COMPATIBILITY CLASSIC B

### BASISINFORMATIONEN:

#### 1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K  
13 W 50/60 Hz 27 mA  
Made in Germany XXX-XXXX

#### 2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.

Liste der getesteten Dimmer

Legend					SUPERSTAR							
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					PAR16 35 36*	PAR16 50 36*	PAR16 60 36*	PAR16 60 120*				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability					EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code				
Not relevant					405283330133/AC01184	405283330171/AC01187	405283330210/AB41305	405807503668/AC03049				
Not tested					405283330157/AC01192	405283330199/AC01194	405283330232/AB41306	405807503632/AC03051				
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
Altenburger Electronic	50 30	230V50Hz	15-350	T	2-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%
AURORA	DSP 400	230V50Hz	400	L	1-10	98% - 15%	2-10	97% - 14%	1-4	96% - 1%	1-4	96% - 1%
Berker	2861	230V50Hz	50-420	U	1-20	98% - 27%	1-20	98% - 25%	1-20	97% - 27%	1-20	97% - 27%
Bicimo	LJNNT441N	230V50Hz			1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%
Bicimo	LJNNT4408	230V50Hz			2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 3%	1-6	97% - 3%
Bicimo	NT4402N	230V50Hz	500	R	3-18	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96% - 22%	1-10	97% - 26%				
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10		2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%
Busch-Jaeger	6526 U	230V50Hz			1-13	98% - 34%	1-10	97% - 35%	1-5		1-5	
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%
ELKO	400GLI	230V50Hz			1-10		1-10		1-4	97% - 1%	1-4	97% - 1%
ELKO	316GLE	230V50Hz	20-315	T	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%










Angaben zum LEDVANCE Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich

# DIMMER COMPATIBILITY CLASSIC B

Legend					SUPERSTAR PLUS P1 B4 B00 A0		SUPERSTAR B 20 E14 standard / G1 E0		SUPERSTAR CL B 40 E14 standard		SUPERSTAR CL B 40 E14 standard / G1 E0 E14		SUPERSTAR CL B 40 E14 standard / G1 E0		SUPERSTAR CL B 60 G1 E0 E14		SUPERSTAR CLASSIC BY G1 E0 E14	
Good dimmability with indicated number of lamps (dimming range greater than 75%)																		
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																		
Undesired dimmability																		
Not relevant																		
Dimmer					EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code	
Brand	Model	Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
20d1	63533	230/50Hz	29,08	T														
20d7	63533	230/50Hz	24,08	T														
ABB	STD 50-3	230/50Hz	60-500	L	99-2%	98-3%	74-0%	97-0%	97-16%	99-7%	77-0%	97-0%	78-0%	100-0%	98-4%	100-7%	97-4%	96-1%
Altenburger	50.3	230/50Hz					97-0%	97-0%	84-2%	89-0%	95-0%	95-0%	97-0%	81-0%	92-0%	95-0%	98-0%	95-30%
AURORA	DSP 400	230/50Hz	400	L	99-0%	99-0%	98-0%	98-0%	100-0%	100-0%	74-0%	91-0%	80-0%	88-0%	93-0%	99-0%	96-0%	95-0%
Berker	2861	230/50Hz	50-420	U	98-0%	98-0%	86-0%	98-0%			97-0%	85-0%	98-0%	82-0%	90-2%	100-0%		
Bicano	LANNT4411 N HCHD/HS44	230/50Hz			92-0%	93-0%	97-0%		100-0%	100-0%								95-0%
Bicano	LANNT4408 HCHD/HS44	230/50Hz									87-0%	77-0%						95-15%
bicano	NT4402N	230/50Hz	500	R							95-0%		100-0%					65-15%
BITCINO	RW4411																	
BITCINO	BITCINO HD4411														97-1%	98-1%	100-0%	100-0%
BITCINO	HD4411														100-0%	100-0%	100-0%	100-0%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	99-0%	99-0%	98-0%	98-0%	100-0%	100-0%	98-0%	99-0%	100-0%	100-0%	92-2%	95-0%	98-0%	97-0%
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	91-0%	94-0%	92-0%	98-0%	100-0%	100-0%	97-0%	98-0%	98-0%	100-0%	90-0%	100-0%	88-0%	94-0%
Busch-Jaeger	2250 U	230/50Hz	60-600	L		99-0%												95-5%
Busch-Jaeger	6526 U	230/50Hz					100-0%				97-0%	79-0%	95-0%	95-0%				100-40%
NTURY CONTMULTIDIMMER		230/50Hz	60-600	U	99-0%	98-0%	77-0%	97-0%	100-0%	99-0%	82-0%	88-0%	84-0%	98-0%	100-0%	100-0%	97-0%	97-0%
DimMax	420 SL	230/50Hz	200	LIT	99-0%	100-0%	100-0%	100-0%	100-0%	99-0%	92-0%	84-0%	89-0%	74-0%	100-0%	100-0%	99-0%	97-0%
DINUY	RE EL1 LE1	230/50Hz	400	LED	98-4%	99-3%	100-0%	85-0%	100-0%	99-0%	85-0%	85-0%	85-0%	90-0%	93-0%	97-4%	98-2%	95-30%
DINUY	RE PLALE 1																	95-40%
DINUY	RE PLALE 0																	94-0%
EcoDIM	EcoDIM B 3-450W Led Dimmer																	58-0%
EHMANN	T24.08																	99-0%
EHMANN	T29.08																	98-0%
ELKO	400GLI	230/50Hz			99-0%	91-0%			95-0%	100-0%				100-0%	95-0%	100-25%		95-5%
ELKO	315GLE	230/50Hz	20-315	T	98-0%	98-0%		98-0%	100-0%	100-0%	92-0%	97-0%		99-0%	97-2%	97-0%		87-0%
ELKO	600GLEA	230/50Hz			97-0%	96-0%	94-0%	98-0%	100-0%	99-0%		98-0%		100-0%	100-0%	100-0%	98-0%	97-0%
ELKO	600GLI	230/50Hz	40-600	U	99-0%	99-0%		100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	100-0%	100-0%	98-0%	90-0%	80-0%
ELKO	420GLEA	230/50Hz	40-420	U	94-0%	96-0%	80-0%	97-0%	80-0%	100-0%	89-0%	88-0%	88-0%	100-0%	100-0%	98-0%	97-0%	95-15%
ELKO	1000LM	230/50Hz			100-0%	98-0%	100-0%	98-0%		98-0%	91-0%							95-10%
ELKO	630GLE	230/50Hz	20-630	U	99-0%	77-0%		100-0%	98-1%	95-0%	92-0%	97-0%	88-0%	100-1%		99-0%	99-0%	95-25%
Eltako	UDS1NPN-UK	230/50Hz	5-400	R/L/C	98-0%	99-0%	100-0%	100-0%	100-0%	100-0%	85-0%	85-0%	85-0%	85-0%	87-0%	90-0%	97-0%	98-0%
ELTAKO	EUDS1NPN-UK																	98-0%
Fetler	40200 LEDxx	230/50Hz			99-0%		80-0%	98-0%	100-0%	80-0%	98-0%	96-0%	98-0%	99-0%	100-0%	100-0%	99-0%	97-0%
Fetler	40600 RLC	230/50Hz	20-600	U	97-0%	96-0%	94-0%	98-0%	100-0%	99-0%		98-0%		100-0%	100-0%	100-0%	98-0%	97-0%
Fetler	40600 RC	230/50Hz			99-0%	77-0%		100-0%	98-1%	95-0%	92-0%	97-0%	88-0%	100-1%		99-0%	99-0%	95-25%
Fetler	40600 RL	230/50Hz			99-0%	99-0%		100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	100-0%	100-0%	98-0%	90-0%	95-15%
Fetler	40420 RLC	230/50Hz			94-0%	96-0%	80-0%	97-0%	80-0%	100-0%	89-0%	88-0%	88-0%	100-0%	100-0%	98-0%	97-0%	95-10%
Fetler	31000	230/50Hz			100-0%	98-0%	100-0%	98-0%		98-0%	91-0%							95-0%
FINDER	15.21.8.230.0200																	97-0%
FINDER	15.21.8.230.8300																	98-1%
FINDER	15.81.8.230.0500																	97-0%
FINDER	80.11.0.240.0000																	98-1%
Gira	226200	230/50Hz			98-0%	98-0%		97-0%	100-0%	100-0%	85-0%	97-0%	80-0%	100-0%	88-0%	89-0%	91-0%	96-0%
Gira	030700	230/50Hz	20-525	T	99-0%	99-0%	98-0%	98-0%	100-0%	100-0%	98-0%	96-0%	100-0%	100-0%	95-0%	88-0%	98-0%	97-0%
Gira	117600	230/50Hz	50-420	U	99-0%	98-0%	100-0%	98-0%	97-0%	96-0%	100-0%	97-0%	100-0%	100-0%	100-1%	100-1%		95-25%
Gira	238500	230/50Hz					98-0%			99-0%	99-0%	100-0%	100-0%					100-0%
Gira	217400	230/50Hz	4X20-250	KNX-U	98-30%	99-22%				81-0%	83-0%	81-0%	83-0%	98-0%	99-0%	97-22%	98-16%	
Hager	WUD87	230/50Hz	400	LED-U	92-0%	84-0%		100-0%	100-0%	77-0%	82-0%	82-0%	100-0%	100-0%	96-0%	98-0%	93-0%	95-20%
Hamilton	KP1X40	230/50Hz	400				80-0%		97-4%	74-0%	96-0%	75-0%	100-0%					100-40%
Hugo Müller	adin 872110 L	230/50Hz			98-4%	99-3%	100-0%	85-0%	100-0%	99-0%			85-0%	85-0%	90-0%	93-0%	97-4%	98-2%

# DIMMER COMPATIBILITY CLASSIC B

Legend						SUPERSTAR PLUS Cl. B BA BA40		SUPERSTAR CL B 25 Filament/Cl. B5		SUPERSTAR CL B 40 Filament		SUPERSTAR CL B 40 Filament/Cl. B5/895d		SUPERSTAR CL B 40 Filament/Cl. B5 E14		SUPERSTAR CL B 40 Filament/Cl. B5		SUPERSTAR CL B 60 Cl. B5 E14		SUPERSTAR CLASSIC BW 76 FILAMENT				
Good dimmability with indicated number of lamps (dimming range greater than 75%)																								
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																								
Undesired dimmability																								
Not relevant																								
Dimmer						EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		
Brand	Model	Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps		
Ion	Industries LED Dimmer 0.3-350 Watt																99-0%	98-1%	100-1%	100-0%	100-0%	99-0%	100-0%	96-0%
Ion	Industries NIEUW-LE D Dimmer 600 Watt																98-0%	99-1%	100-0%	100-0%	100-0%	100-0%	97-0%	94-0%
Ion	ID350W MKII																98-0%	98-1%	100-0%	100-0%	100-0%	100-0%	97-0%	100-0%
Ion	Industries LED Dimmer 200 Watt																99-0%	98-1%	100-0%	100-0%	100-0%	100-0%	98-0%	94-0%
Ion	ID200W- MKII																98-1%	98-1%	100-0%	100-0%	100-0%	100-0%	94-0%	90-0%
Jung	225 NVDE	230/50Hz	20-500	L	96-0%	98-0%		97-0%	100-0%	100-0%	85-0%	97-0%	80-0%	100-0%	88-0%	89-0%	91-0%	96-0%					95-0%	
Jung	225 TDE	230/50Hz			99-0%	99-0%	98-0%	98-0%	100-0%	100-0%	98-0%	96-0%	100-0%	100-0%	95-0%	88-0%	98-0%	97-0%					95-25%	100-35%
Jung	254 UDI E1	230/50Hz			99-0%	98-0%	100-0%	98-0%	97-0%	100-0%	97-0%	97-0%	100-0%	99-0%	100-1%	100-1%								
Jung	1224 LEDUDE	230/50Hz		LED	98-0%	90-0%	98-0%	100-0%			99-0%	99-0%	100-0%	100-0%										
Jung	3904 REGHE	230/50Hz			98-30%	99-22%		100-0%					81-0%	83-0%	98-0%	99-0%	97-22%	98-16%						
JUNG	UD 1755 REG																0-0%	0-0%	100-0%	100-0%	100-0%		96-0%	96-0%
JUNG	1724 DM																0-0%	0-0%	95-0%	96-0%		94-0%	96-0%	100-0%
JUNG	1731 DD																98-1%	98-1%			96-0%		99-0%	100-0%
Legrand	665114	230/50Hz	400	U	92-0%	93-0%	97-0%		100-0%	100-0%						88-0%	98-0%					95-0%	95-15%	
Legrand	74319/67433	230/50Hz	400	U	92-0%	93-0%	97-0%		100-0%	100-0%						88-0%	98-0%	89-0%	90-0%			95-0%	95-15%	
Legrand	72239/67273	230/50Hz	400	U	92-0%	93-0%	97-0%		100-0%	100-0%						88-0%	98-0%	89-0%	90-0%			95-0%	95-15%	
Legrand	78407/07920	230/50Hz	400	U	92-0%	93-0%	97-0%		100-0%	100-0%						88-0%	98-0%	89-0%	90-0%			95-0%	95-15%	
Legrand	48869/04887	230/50Hz	400	U	92-0%	93-0%	97-0%		100-0%	100-0%						88-0%	98-0%	89-0%	90-0%			95-0%	95-15%	
Legrand	067083/048 869	230/50Hz	400	U	92-0%	93-0%	97-0%		100-0%	100-0%						88-0%	98-0%	89-0%	90-0%			95-0%	95-15%	
Legrand	770061	230/50Hz	400	RL			100-0%	100-0%			82-0%		81-0%	83-2%										
Legrand	0999314	230/50Hz	300	RL	100-0%	98-0%		89-0%			74-0%	85-0%		82-0%										
Legrand	770062	230/50Hz	400	RLC	100-0%	97-0%		97-0%	99-0%	99-0%		100-0%	65-0%	100-0%	99-0%	100-0%	97-0%	97-0%				95-0%	100-5%	
Legrand	078405	230/50Hz	600	RL							75-0%	87-0%	77-0%											
MASTER	DM-DGL	230/50Hz	1000	U/LED	98-41%	98-47%	97-2%	100-0%			77-0%	85-0%	77-0%	85-0%			97-32%	98-32%						
MASTER	DM-2500	230/50Hz	2500	U/LED	98-0%	99-0%	74-0%	97-0%	98-0%	100-0%	74-0%	83-0%		95-0%	92-0%	96-0%	97-0%	98-0%						
Merten	4EG5138-0001	230/50Hz			98-0%	98-0%		98-0%	100-0%	100-0%		97-0%		99-0%	97-2%	97-0%						87-0%	100-5%	
Merten	4EG5134-0001	230/50Hz			99-0%		80-0%	98-0%	100-0%	80-0%	98-0%	96-0%	98-0%	99-0%	100-0%	100-0%	99-0%	97-0%				95-5%	100-20%	
Merten	4EG5139-0001	230/50Hz			97-0%	96-0%	94-0%	98-0%	100-0%	99-0%		98-0%		100-0%	100-0%	100-0%	98-0%	97-0%				95-0%	100-0%	
Merten	4EG5137-0001	230/50Hz			99-0%	77-0%		100-0%	98-1%	95-0%	92-0%	97-0%	88-0%	100-1%			99-0%	99-0%				95-25%		
Merten	4EG5133-0001	230/50Hz			99-0%	99-0%		100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	100-0%	100-0%	98-0%	90-0%	60-0%				95-15%	95-5%	
Merten	4EG5138-0001	230/50Hz			94-0%	96-0%	80-0%	97-0%	80-0%	100-0%	89-0%	98-0%	88-0%	100-0%	100-0%	100-0%	98-0%	97-0%					95-10%	
Merten	4EG5170-030	230/50Hz	10-200	U	77-0%		83-0%	89-0%			65-0%	85-0%	88-0%	88-0%	100-0%	100-0%	99-0%				100-0%	100-0%		
Merten	MEG 5131	230/50Hz	40-400	L	99-0%	96-0%	93-0%	100-0%	100-0%	100-0%	63-0%	83-0%	64-0%	81-0%	95-0%	100-0%	98-0%	86-0%				95-0%	95-0%	
Merten	MEG 5132	230/50Hz			99-0%	96-0%	93-0%	100-0%	100-0%	100-0%	63-0%	83-0%	64-0%	81-0%	95-0%	100-0%	98-0%	86-0%				95-0%	95-0%	
Merten	MEG 5140	230/50Hz	9-100	L	95-0%	97-0%		98-0%	100-0%	100-0%	58-0%	82-0%	58-0%	82-0%	99-0%	100-0%	99-0%	91-0%				95-0%	95-0%	
Merten	MEG 5135	230/50Hz	60-1000	L	100-0%	98-0%	100-0%	98-0%	98-0%		96-0%	91-0%		88-0%			97-0%	97-0%				95-0%	95-0%	
MK	K4501	230/50Hz	180	L	98-0%	100-0%	74-0%	97-0%	96-0%	96-0%		99-0%		100-0%	92-0%	100-0%	97-0%	97-0%						
NEXUS	881P-01	230/50Hz	400	L	99-0%	99-0%	74-0%	97-0%	100-0%	99-0%	60-0%	98-0%		100-0%										
NIKO	310-01900 01901	230/50Hz	5-200	U	99-0%	98-0%	85-0%	95-0%	98-0%	98-0%	85-0%	85-0%	68-0%	74-0%	98-0%	100-0%	98-0%	98-0%				95-0%	95-5%	
NIKO	330-00700 00701	230/50Hz	5-200	U	98-0%	100-6%	71-0%	89-0%	100-0%	100-0%	65-0%	85-0%	52-0%			100-0%	100-0%	98-6%	98-3%			95-0%	95-0%	
Odace	S520512	230/50Hz			99-0%		80-0%	98-0%	100-0%	80-0%	98-0%	96-0%	98-0%	99-0%	100-0%	100-0%	99-0%	97-0%				95-5%	100-20%	

# DIMMER COMPATIBILITY CLASSIC B

Legend					SUPERSTAR PLUS E14 B BA RM 40		SUPERSTAR CL B 25 E14 Elament/CI ED		SUPERSTAR CL B 40 E14 Ersted		SUPERSTAR CL B 40 E14 Elament/CI ED E57/R24		SUPERSTAR CL B 40 E14 Elament/CI ED E14		SUPERSTAR CL BA 40 E14 Elament / CI ED		SUPERSTAR CL B 60 E14 CI ED E14		SUPERSTAR CLASSIC BW E14 ELAMENT					
Good dimmability with indicated number of lamps (dimming range greater than 75%)																								
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																								
Undesired dimmability																								
Not relevant																								
EAN / Basic Code					4058075602731/ AC45169 4058075602735/ AC45170 4058075602729/ AC45171		4058075436824/ AC32304 4058075437005/ AC32331		4058075430914/ AC45055		4058075446878/ AC32291 4058075434509/ AC32296 4058075433025/ AC32324		4058075434943/ AC32320 4058075437043/ AC32336 4058075435695/ AC32338		4058075434561/ AC44597 4058075434585/ AC44598		4058075434486/ AC57886 4058075654471/ AC57887		4058075836709/ AC58081		4058075836723/ AC58082		4058075839823/ AC59515	
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps		
Brand	Model	Voltage range	Power	Type																				
Odace	S520511	230/50Hz			99-0%	99-0%			100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	100-0%	100-0%	98-0%	60-0%			95-15%	95-5%		
Odace	S520515	230/50Hz			94-0%	96-0%	80-0%	97-0%	80-0%	100-0%	89-0%	98-0%	88-0%	100-0%	100-0%	100-0%	98-0%	97-0%			95-10%			
Odace	S520518	230/50Hz			95-0%	97-0%			100-0%	100-0%	58-0%	82-0%	58-0%	82-0%	99-0%	100-0%	99-0%	91-0%			95-0%	95-0%		
Osram	Ti DALI 315 Di	230/50Hz	20-315	DALI-T	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%		100-0%		100-0%	88-0%	100-0%	98-0%	96-0%			95-10%	100-15%		
PEHA	435 HAN	230/50Hz	60-600	L	97-0%	98-0%			100-0%	100-0%		81-0%		81-0%	88-0%	100-1%	93-0%	96-0%						
Plejd	DIM-01																97-1%	98-1%	100-0%	100-0%	100-0%	100-0%	95-0%	96-0%
Plejd	DIM-02																98-1%	99-1%					94-0%	96-0%
Plejd	RTR-01-SW																							
RVE	RV LED 250																98-1%	98-2%	100-1%	100-0%	100-0%	99-0%	94-0%	94-0%
Schneider	400GLI	230/50Hz	40-400	T	90-0%	91-0%			95-0%	100-0%				100-0%	95-0%	100-25%						95-5%	100-0%	
Schneider	SBD315RC	230/50Hz			98-0%	98-0%			98-0%	100-0%			97-0%		99-0%	97-2%	97-0%					87-0%	100-5%	
Schneider	SBD200LED	230/50Hz	400		99-0%		80-0%	98-0%	100-0%	80-0%	98-0%	96-0%	98-0%	99-0%	100-0%	100-0%	99-0%	97-0%			95-5%	100-20%		
Schneider	SBD600RCRL	230/50Hz			97-0%	96-0%	94-0%	98-0%	100-0%	99-0%		98-0%		100-0%	100-0%	100-0%	98-0%	97-0%			95-0%	100-0%		
Schneider	SBD630RC	230/50Hz			99-0%	77-0%			100-0%	98-1%	95-0%	92-0%	97-0%	88-0%	100-1%		99-0%	99-0%			95-25%			
Schneider	SBD600RL	230/50Hz			99-0%	99-0%			100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	100-0%	100-0%	98-0%	60-0%			95-15%	95-5%		
Schneider	SBD420RCRL	230/50Hz			94-0%	96-0%	80-0%	97-0%	80-0%	100-0%	89-0%	98-0%	88-0%	100-0%	100-0%	100-0%	98-0%	97-0%					95-10%	
Schneider	5170	230/50Hz			77-0%		83-0%	89-0%			65-0%	85-0%	88-0%	88-0%	100-0%	100-0%	99-0%					100-0%	100-0%	
Schneider	SBD400RL	230/50Hz			99-0%	96-0%	93-0%	100-0%	100-0%	100-0%	63-0%	83-0%	64-0%	81-0%	95-0%	100-0%	98-0%	86-0%			95-0%	95-0%		
Schneider	SBDSPSL	230/50Hz			95-0%	97-0%			98-0%	100-0%	58-0%	82-0%	58-0%	82-0%	99-0%	100-0%	99-0%	91-0%			95-0%	95-0%		
Schneider	ATTD1000RL	230/50Hz			100-0%	98-0%	100-0%	98-0%	98-0%		96-0%	91-0%		88-0%			97-0%	97-0%			95-0%	95-0%		
Scolmore	MD9014																97-0%	98-1%	95-4%	96-0%		93-6%	95-0%	95-0%
Shuttle	JIM-T-LED-500	230/50Hz	2-500	T & LED-T	99-0%	99-0%		97-0%	99-0%	100-0%	86-0%	92-0%		100-0%	100-0%	100-0%	97-0%	97-0%						
Siemens	5TC8 284	230/50Hz	20-525	T	82-2%	71-0%		98-0%	100-0%	100-0%					90-43%	96-0%	77-1%	70-0%			95-45%			
Siemens	VG1-528-1AB	230/50Hz	20-500	KNX-U	100-21%	97-24%	100-0%				85-0%	85-0%	85-0%	85-0%	100-0%	100-0%								
theben	MAX 544 plus	230/50Hz	250	T	61-0%	99-0%	97-0%		94-0%	94-0%	93-0%	95-0%	93-0%	93-0%	95-0%	95-0%					95-25%	95-25%		
theben	iMAX 534 plu	230/50Hz	400	T	60-0%	98-0%	100-0%	97-0%			100-0%	100-0%	100-0%	100-0%	97-0%	98-0%	97-0%	97-0%			95-55%			
VADSBO	LD 220	230/50Hz	1-200	U	98-0%	99-0%	100-0%	98-0%			83-0%	89-0%		96-0%	100-12%	99-14%	97-0%	97-0%						
VARILIGHT	HQ3W	230/50Hz	400		100-2%	99-3%	69-0%	89-0%	95-0%	100-0%	65-0%	91-0%	52-0%	92-0%	94-0%	99-0%	97-4%	96-2%			95-25%	95-0%		
VARILIGHT	JQP401W	230/50Hz	400	T	99-2%	91-4%		95-0%	97-23%	96-22%	97-0%	99-0%	99-0%	100-0%							95-0%	95-0%		
Varilight	MJP120																97-0%	98-1%	100-0%	100-0%	100-0%	99-0%	44-0%	
Vimar	20135	230/50Hz	3 - 100	U				100-0%	96-0%	96-0%	58-0%	74-0%		83-0%	95-0%	98-0%	97-0%	98-0%						
YOKIS	MTV 500E/M																0-0%	0-0%	100-0%	100-0%	100-0%	99-0%	66-0%	93-0%
ZANO	WH401	230/50Hz	400	L	90-0%	98-20%	75-0%	80-0%	96-0%	94-0%		99-0%		100-0%	88-3%	98-8%					95-0%			
ZANO	WH251	230/50Hz	250		86-0%	89-0%	77-0%	94-0%	96-0%	96-0%	85-0%	97-0%	74-0%	95-0%							95-0%	95-0%		
ZANO	Z GRID 700	230/50Hz	250	LED			100-0%	100-0%			98-0%	95-0%	100-0%	82-0%										
ZANO	Z GRID 600	230/50Hz	250	T	99-0%	99-0%			100-0%	100-0%							97-0%	98-0%						
ZANO	Z GRID 500	230/50Hz	500		99-0%	98-0%	95-0%	95-0%	100-0%	99-0%		98-0%		99-0%	100-0%		97-0%	98-0%						

**Please Note:**

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

**Application Notes:**

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

**Bitte beachten:**

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

**Anwendungshinweis:**

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

**LEDVANCE GmbH**

Head Office:

Parkring 1-5  
85748 Garching, Germany  
Phone +49 89 780673-100  
Fax +49 89 780673-XXX  
[www.ledvance.com](http://www.ledvance.com)