


DIMMER COMPATIBILITY MR11+MR16

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?



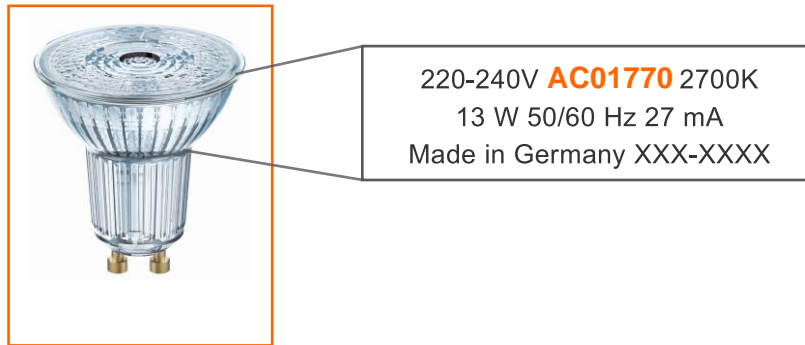

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:



2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36*				SUPERSTAR PAR16 50 36*				SUPERSTAR PAR16 80 36*				SUPERSTAR PAR16 80 120*			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					EAN/Basic Code				EAN/Basic Code				EAN/Basic Code				EAN/Basic Code			
Undesired dimmability					4052839330153/AC01184				405283933017/AC01187				4052839330218/AB41905				405807503688/AC03043			
Not relevant					4052839330157/AC01182				4052839330195/AC01184				4052839330232/AB41906				405807503682/AC03051			
Not tested					Number of Lamps				Number of Lamps				Number of Lamps				Number of Lamps			
Dimmer					Dimming range		Dimming range		Dimming range		Dimming range		Dimming range		Dimming range		Dimming range			
Brand	Model	Voltage range	Power	Type	1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%	1-20	98%-15%	2-20	97%-12%	2-20	98%-16%	2-20	98%-16%
ABB	STD 50-3	230/50Hz	60-500	L	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%
Altenburger Electronic	50 30	230/50Hz	15-350	T	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%
ALPORA	DSP 400	230/50Hz	400	L	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%	1-10	98%-15%
Berker	2861	230/50Hz	50-420	U	1-20	98%-27%	1-20	98%-26%	1-20	97%-27%	1-20	97%-27%	1-20	98%-27%	1-20	98%-26%	1-20	98%-26%	1-20	98%-26%
Blicino	L/NNT441N	230/50Hz			1-15	98%-1%	1-10	97%-5%	1-6	94%-7%	1-6	94%-7%	1-6	98%-1%	2-9	98%-1%	1-6	97%-9%	1-6	97%-9%
Blicino	L/NNT4408	230/50Hz			2-20	98%-1%	2-9	98%-1%	1-6	97%-9%	1-6	97%-9%	1-6	98%-1%	2-9	98%-1%	1-6	97%-9%	1-6	97%-9%
Blicino	NT4402N	230/50Hz	500	R	3-19	99%-19%	2-12	97%-19%	1-8	95%-22%	1-8	95%-22%	1-8	99%-19%	2-12	97%-19%	1-8	95%-22%	1-8	95%-22%
Busch-Jaeger	6513 U-102	230/50Hz	40-420	T	2-20	99%-15%	2-20	98%-17%	2-20	98%-21%	2-20	98%-21%	2-20	99%-15%	2-20	98%-17%	2-20	98%-21%	2-20	98%-21%
Busch-Jaeger	6523 U-102	230/50Hz	420	T	1-10	96%-22%	1-10	97%-26%	1-10	97%-26%	1-10	97%-26%	1-10	96%-22%	1-10	97%-26%	1-10	97%-26%	1-10	97%-26%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	1-10	98%	2-14	98%-16%	1-9	97%-15%	1-9	97%-15%	1-10	98%	2-14	98%-16%	1-9	97%-15%	1-9	97%-15%
Busch-Jaeger	6526 U	230/50Hz			1-13	98%-34%	1-10	97%-35%	1-5	97%-23%	1-5	97%-23%	1-13	98%	2-14	98%-16%	1-9	97%-15%	1-9	97%-15%
Busch-Jaeger	2247 U-500	230/50Hz			1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%	1-20	98%-15%	2-20	97%-12%	2-20	98%-16%	2-20	98%-16%
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	L	2-13	98%-1%	1-10	98%-5%	1-6	97%-9%	1-6	97%-9%	2-13	98%-1%	1-10	98%-5%	1-6	97%-9%	1-6	97%-9%
DINUY	RE EL1LE1	230/50Hz	400	LED	1-11	98%-1%	1-10	99%-1%	1-5	99%-7%	1-5	99%-7%	1-11	98%-1%	1-10	99%-1%	1-5	99%-7%	1-5	99%-7%
ELKO	400GLI	230/50Hz			1-10	98%	1-10	98%	1-4	97%-1%	1-4	97%-1%	1-10	98%	1-10	98%	1-4	97%-1%	1-4	97%-1%
ELKO	316GLE	230/50Hz	20-315	T	2-20	98%-6%	1-20	98%-7%	1-20	97%-10%	1-20	97%-10%	2-20	98%-6%	1-20	98%-7%	1-20	97%-10%	1-20	97%-10%
ELKO	600GLI	230/50Hz	40-600	U	1-20	98%-1%	1-13	97%-1%	1-8	96%-1%	1-8	96%-1%	1-20	98%-1%	1-13	97%-1%	1-8	96%-1%	1-8	96%-1%
ELKO	420GLEI	230/50Hz	40-420	U	1-14	98%-1%	1-13	97%-4%	1-10	97%-19%	1-10	97%-19%	1-14	98%-1%	1-13	97%-4%	1-10	97%-19%	1-10	97%-19%

Information about the LEDVANCE lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER COMPATIBILITY MR11+MR16

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
13 W 50/60 Hz 27 mA
Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.










Liste der getesteten Dimmer

Legend					SUPERSTAR							
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					PAR16 35 36*	PAR16 50 36*	PAR16 60 36*	PAR16 60 120*				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability					EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code				
Not relevant					405283330133/AC01184	405283330171/AC01187	405283330210/AB41305	405807503668/AC03049				
Not tested					405283330157/AC01192	405283330199/AC01194	405283330232/AB41306	405807503632/AC03051				
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%
Altenburger Electronic	50 30	230V50Hz	15-350	T	2-20	98%-15%	2-20	97%-12%	2-20	98%-16%	2-20	98%-16%
AURORA	DSP 400	230V50Hz	400	L	1-10	98%-15%	2-10	97%-14%	1-4	96%-1%	1-4	96%-1%
Berker	2861	230V50Hz	50-420	U	1-20	98%-27%	1-20	98%-25%	1-20	97%-27%	1-20	97%-27%
Bicimo	LJNNT441N	230V50Hz			1-15	98%-1%	1-10	97%-5%	1-6	94%-7%	1-6	94%-7%
Bicimo	LJNNT4408	230V50Hz			2-20	98%-1%	2-9	98%-1%	1-6	97%-3%	1-6	97%-3%
Bicimo	NT4402N	230V50Hz	500	R	3-18	99%-19%	2-12	97%-19%	1-8	95%-22%	1-8	95%-22%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98%-15%	2-20	98%-17%	2-20	98%-21%	2-20	98%-21%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96%-22%	1-10	97%-26%				
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10		2-14	98%-16%	1-9	97%-15%	1-9	97%-15%
Busch-Jaeger	6526 U	230V50Hz			1-13	98%-34%	1-10	97%-35%	1-5		1-5	
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98%-1%	1-10	98%-5%	1-6	97%-9%	1-6	97%-9%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98%-1%	1-10	98%-1%	1-5	99%-7%	1-5	99%-7%
ELKO	400GLI	230V50Hz			1-10		1-13		1-4	97%-1%	1-4	97%-1%
ELKO	316GLE	230V50Hz	20-315	T	2-20	98%-6%	1-20	98%-7%	1-20	97%-10%	1-20	97%-10%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98%-1%	1-13	97%-1%	1-8	96%-1%	1-8	96%-1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98%-1%	1-13	97%-4%	1-10	97%-19%	1-10	97%-19%










Angaben zum LEDVANCE Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich










DIMMER COMPATIBILITY MR11+MR16

Legend					MR16 20 36° DIM S	MR16 35 36° DIM S	MR16 43 36° DIM S	MR16 20 36° DIM P	MR16 35 36° DIM P	MR16 50 36° DIM P	MR11 20 36° DIM P	MR11 35 36° DIM P	MR16 35 36° DIM S	
Good dimmability with indicated number of lamps (dimming range greater than 75%)														
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)														
Undesired dimmability														
Not tested														
Dimmer					EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code	
Brand	Model	Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
ABB	STD 50-3	230/50Hz	60-500	L	100-12%	100-47%	100-20%	100-5%	70-10%	100-25%	100-19%		100-19%	100-19%
Attenburger	50,3	230/50Hz				100-46%	90-15%	100-22%	94-8%		89-26%		89-26%	89-26%
AURORA	DSP400	230/50Hz	400	T	97-0%		90-0%	70-0%	65-0%	100-0%	100-0%	100-0%	100-0%	90-0%
Berker	2861	230/50Hz	50-420	U	100-24%	100-36%	95-9%	95-15%	95-8%	100-15%		100-11%	100-11%	95-9%
Bticino	LN/NT4411 N HCHD/HS44 11	230/50Hz			100-0%	100-0%	100-0%	95-10%	80-0%	89-2%	100-0%	100-9%	100-0%	100-0%
Bticino	NT4402N	230/50Hz	500	R		100-39%		100-20%	59-20%	100-23%		89-0%		89-0%
Busch-Jaeger	6513 U-102	230/50Hz	420			100-41%	100-45%	100-45%	85-12%	100-19%	100-47%	100-47%	100-47%	100-45%
Busch-Jaeger	6523 U-102	230/50Hz	40-420		100-0%	100-0%	90-0%	90-8%	85-0%	96-5%	100-0%	90-0%	100-0%	90-0%
Busch-Jaeger	2250 U	230/50Hz	60-600	L			95-0%	95-0%			98-0%	100-0%	98-0%	100-0%
Busch-Jaeger	6526 U	230/50Hz												89-0%
NTURYCONFULTI DIMMEF		230/50Hz	60-600	U	100-0%	100-0%	95-0%	100-0%	97-0%	100-0%	89-0%	90-29%	89-0%	90-29%
DimMax	420SL	230/50Hz	200	L/T	100-0%	100-0%	100-0%	100-0%	100-2%	100-2%	93-0%	100-0%	93-0%	100-0%
DINUY	RE L1 LE1	230/50Hz	400	LED	100-0%	100-0%	100-0%	100-0%	97-25%	100-34%	100-0%	100-0%	100-0%	100-0%
Domintell	3mMax 420 SI	230/50Hz	200	L/T	100-0%	100-0%	100-0%	100-0%	100-2%	100-2%	93-0%	100-0%	93-0%	100-0%
ELKO	400GLI	230/50Hz			90-8%	100-18%	85-0%	90-0%	56-0%	100-0%	91-9%	84-9%	91-9%	85-0%
ELKO	315GLE	230/50Hz	20-315	T	100-19%	100-10%	95-0%	95-0%	93-0%	100-0%	84-0%	92-0%	84-0%	92-0%
ELKO	600GLI	230/50Hz	40-600	U	100-8%	100-8%	100-13%	100-0%	98-6%	100-3%	100-11%	100-0%	100-11%	100-0%
ELKO	600GLEf	230/50Hz				100-0%	100-0%	100-0%		100-0%	84-0%	89-0%	84-0%	89-0%
ELKO	420GLEf	230/50Hz	40-420	U		100-6%	100-0%	100-8%	100-6%	100-5%	100-9%	100-0%	100-8%	100-8%
ELKO	1000LRI	230/50Hz				100-0%			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
ELKO	630GLE	230/50Hz	20-630	U			85-16%	100-15%	92-12%	100-15%	84-17%	100-13%	84-17%	100-13%
Eltako	UD61NPN-UK	230/50Hz	5-400	R/L/C	100-0%	100-0%	90-10%	80-20%	91-0%	100-3%	93-9%	100-19%	93-9%	100-19%
Feller	40200.LEDxxx	230/50Hz			100-15%	100-40%	90-0%	100-18%	65-4%		89-17%	93-11%	89-17%	93-11%
Feller	40600.RL	230/50Hz			100-8%	100-8%	100-13%	100-0%	98-6%	100-3%	100-11%	100-0%	100-11%	100-0%
Feller	40600.RC	230/50Hz					85-16%	100-15%	92-12%	100-15%	84-17%	100-13%	84-17%	100-13%
Feller	40600.RLC	230/50Hz	20-600	U		100-0%	100-0%	100-0%	100-0%	84-0%	89-0%	84-0%	89-0%	100-0%
Feller	40420.RLC	230/50Hz				100-6%	100-0%	100-8%	100-6%	100-5%	100-9%	100-0%	100-8%	100-8%
Feller	31000	230/50Hz					100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Gira	226200	230/50Hz			100-0%	100-0%	85-0%	90-0%	71-0%	100-0%	90-0%	93-0%	90-0%	93-0%
Gira	030700	230/50Hz	20-525	T	100-39%	100-39%	95-15%	95-15%	100-7%	100-15%	92-11%	93-11%	92-11%	93-11%
Gira	117600	230/50Hz	50-420	U			96-10%	95-15%	94-7%	100-15%	93-9%	100-19%	93-9%	100-19%
Gira	238500	230/50Hz			100-19%	100-19%		95-0%	100-0%				100-0%	100-0%
Gira	217400	230/50Hz	4X20-250	KNX-U	100-33%	100-24%	100-15%	100-20%	93-9%	100-16%	100-19%	100-19%	100-19%	100-15%
Hager	WUD87	230/50Hz	400	LED-U	100-0%	100-17%	95-15%	95-15%	97-9%	100-16%	100-19%	89-17%	100-19%	89-17%
Hamilton	KP1X40	230/50Hz	400				90-0%	100-15%			100-9%	100-0%	100-9%	100-0%
Hugo Müller	adin 872110 I	230/50Hz			100-0%	100-0%	100-0%	100-0%	97-25%	100-34%	100-0%	100-0%	100-0%	100-0%
Jung	225 NVDE	230/50Hz	20-500		100-0%	100-0%	85-0%	90-0%	71-0%	100-0%	90-0%	93-0%	90-0%	93-0%
Jung	225 TDE	230/50Hz			100-39%	100-39%	95-15%	95-15%	100-7%	100-15%	92-11%	93-11%	92-11%	93-11%
Jung	254 UDI E1	230/50Hz					96-10%	95-15%	94-7%	100-15%	93-9%	100-19%	93-9%	100-19%
Jung	1224 LEDUCE	230/50Hz	3-100		100-19%	100-19%		95-0%	100-0%				100-0%	100-0%

DIMMER COMPATIBILITY MR11+MR16

Legend					MR16 20 36° DIM S	MR16 35 36° DIM S	MR16 43 36° DIM S	MR16 20 36° DIM P	MR16 35 36° DIM P	MR16 50 36° DIM P	MR11 20 36° DIM P	MR11 35 36° DIM P	MR16 35 36° DIM S	
Good dimmability with indicated number of lamps (dimming range greater than 75%)														
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)														
Undesired dimmability														
Not tested														
					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	
Dimmer					4098854070525 / AC42765	4098854070525 / AC42765	4098854070525 / AC42765	4098854070525 / AC42765	4098854070525 / AC42765	4098854070525 / AC42765	4098854070525 / AC42765	4098854070525 / AC42765	4098854070525 / AC42765	
Brand	Model	Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Jung	3904 REGHE	230/50Hz			100-33%	100-24%	100-15%	100-20%	93-0%	100-16%	100-19%	100-19%	100-19%	100-19%
Legrand	665114	230/50Hz	400	U	100-0%	100-0%	100-0%	95-10%	80-0%	89-2%	100-0%	100-9%	100-0%	95-10%
Legrand	74319/57433	230/50Hz	400	U	100-0%	100-0%	100-0%	95-10%	80-0%	89-2%	100-0%	100-9%	100-0%	95-10%
Legrand	72239/57273	230/50Hz	400	U	100-0%	100-0%	100-0%	95-10%	80-0%	89-2%	100-0%	100-9%	100-0%	95-10%
Legrand	78407/07920	230/50Hz	400	U	100-0%	100-0%	100-0%	95-10%	80-0%	89-2%	100-0%	100-9%	100-0%	95-10%
Legrand	48869/04887	230/50Hz	400	U	100-0%	100-0%	100-0%	95-10%	80-0%	89-2%	100-0%	100-9%	100-0%	95-10%
Legrand	06708/048869	230/50Hz	400	U	100-0%	100-0%	100-0%	95-10%	80-0%	89-2%	100-0%	100-9%	100-0%	95-10%
Legrand	099314	230/50Hz	300	RL										
Legrand	770062	230/50Hz	400	RLC	100-0%	100-0%								
Legrand	078405	230/50Hz	600	RL										
Legrand	770061	230/50Hz												
MASTER	DM-DGL	230/50Hz	1000	U/LED										
MASTER	DM-2500	230/50Hz	2500	U/LED	100-0%	100-0%	100-0%	100-0%	96-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Merten	MEG5136-000	230/50Hz			100-19%	100-10%	95-0%	95-0%	93-0%	100-0%	84-0%	92-0%	84-0%	92-0%
Merten	MEG5134-000	230/50Hz			100-15%	100-40%	90-0%	100-18%	65-4%	89-17%	89-17%	93-11%	90-0%	100-18%
Merten	MEG5133-000	230/50Hz			100-8%	100-8%	100-13%	100-0%	98-6%	100-3%	100-11%	100-0%	100-13%	100-0%
Merten	MEG5137-000	230/50Hz					85-16%	100-15%	92-12%	100-15%	84-17%	100-13%	84-17%	100-13%
Merten	MEG5139-000	230/50Hz					100-0%	100-0%	100-0%	100-0%	84-0%	89-0%	84-0%	89-0%
Merten	MEG5138-000	230/50Hz					100-6%	100-0%	100-6%	100-5%		100-9%	100-0%	100-14%
Merten	MEG5170-030	230/50Hz	10-200	U	100-36%	100-41%	60-15%						60-15%	100-14%
Merten	MEG5131	230/50Hz	40-400	L	100-0%	100-0%	95-0%	95-0%	100-0%	100-0%	89-0%	89-0%	89-0%	89-0%
Merten	MEG5132	230/50Hz			100-0%	100-0%	95-0%	95-0%	100-0%	100-0%	89-0%	89-0%	89-0%	89-0%
Merten	MEG5140	230/50Hz	9-100	L			85-0%	95-0%		100-0%	84-0%	89-0%	84-0%	89-0%
Merten	MEG5135	230/50Hz	60-1000	L			100-0%	100-0%		100-0%	100-0%	100-0%	100-0%	100-0%
MK	K4501	230/50Hz	180	L	100-0%	100-0%	95-0%	95-5%	87-2%	100-4%	91-0%	91-0%	91-0%	91-0%
NEXUS	881P-01	230/50Hz	400	L	100-0%				75-0%	100-0%				
NIKO	0-019000190	230/50Hz	5-200	U	100-0%		100-0%	100-5%	97-0%	100-3%	100-0%	100-0%	100-0%	100-5%
NIKO	0-007000070	230/50Hz	5-200	U	100-0%	100-0%	100-0%	100-0%	97-7%	100-9%	100-0%	100-0%	100-0%	100-0%
Odace	S520512	230/50Hz			100-15%	100-40%	90-0%	100-18%	65-4%	89-17%	93-11%	89-17%	93-11%	90-0%
Odace	S520511	230/50Hz			100-8%	100-8%	100-13%	100-0%	98-6%	100-3%	100-11%	100-0%	100-11%	100-0%
Odace	S520515	230/50Hz					100-6%	100-8%	100-6%	100-5%	100-9%	100-9%	100-0%	100-8%
Odace	S520518	230/50Hz					85-0%	95-0%		100-0%	84-0%	89-0%	84-0%	89-0%
Osram	Ti DALI 315 DII	230/50Hz	20-315	DALI-T	100-10%	100-34%	100-14%	100-14%	100-6%	100-7%	100-13%	100-13%	100-13%	100-14%
PEHA	435 HAN	230/50Hz	60-600	L	87-9%		80-0%	85-0%	56-0%	100-0%	89-0%	84-0%	89-0%	84-0%
Schneider	400GLI	230/50Hz	40-400	T	90-8%	100-18%	85-0%	90-0%	56-0%	100-0%	91-9%	84-0%	91-9%	84-0%
Schneider	SBD315RC	230/50Hz			100-19%	100-10%	95-0%	95-0%	93-0%	100-0%	84-0%	92-0%	84-0%	92-0%
Schneider	SBD200LED	230/50Hz	400		100-15%	100-40%	90-0%	100-18%	65-4%	89-17%	93-11%	89-17%	93-11%	90-0%
Schneider	SBD600RL	230/50Hz			100-8%	100-8%	100-13%	100-0%	98-6%	100-3%	100-11%	100-0%	100-11%	100-0%
Schneider	SBD630RC	230/50Hz					85-16%	100-15%	92-12%	100-15%	84-17%	100-13%	84-17%	100-13%
Schneider	SBD600RCL	230/50Hz					100-0%	100-0%		100-0%	84-0%	89-0%	84-0%	89-0%

DIMMER COMPATIBILITY MR11+MR16

Legend					MR16 20 36° DIM S	MR16 35 36° DIM S	MR16 43 36° DIM S	MR16 20 36° DIM P	MR16 35 36° DIM P	MR16 50 36° DIM P	MR11 20 36° DIM P	MR11 35 36° DIM P	MR16 35 36° DIM S						
Good dimmability with indicated number of lamps (dimming range greater than 75%)																			
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																			
Undesired dimmability																			
Not tested																			
EAN / Basic Code					40998540705017 / AC42764 4099854070525 / AC42765 4099854070549 / AC42766	4099854058776 / AC58019 4099854058837 / AC58020 4099854058929 / AC58021	4099854048111 / AC45643 4099854048159 / AC45644 4099854048234 / AC45645	4099854070583 / AC57993 4099854070594 / AC57994 4099854070617 / AC57995	4099854058698 / AC57996 4099854059711 / AC57997 4099854059735 / AC57998	4099854234705 / AC57978 4099854234729 / AC57979 4099854234743 / AC57980	4099854050206 / AC45658	4099854050268 / AC45659	4058075757684 / AC35791 4058075757707 / AC35792 4058075757745 / AC35793						
Brand	Model	Dimmer Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	
Schneider	SBD420RCRL	230/50Hz			100-0%	100-6%	100-0%	100-8%	100-6%	100-5%									
Schneider	5170	230/50Hz			100-36%	100-41%	60-15%						60-15%	100-14%	100-29%	62-8%	75-17%		
Schneider	SBD400RL	230/50Hz			100-0%	100-0%	95-0%	95-0%	100-0%	100-0%	89-0%	89-0%	89-0%	89-0%	95-0%	95-0%	100-0%	100-0%	95-0%
Schneider	SBDSPL	230/50Hz					85-0%	95-0%			84-0%	89-0%	84-0%	89-0%	85-0%	95-0%	100-0%		78-0%
Schneider	ATTD1000RL	230/50Hz					100-0%	100-0%			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%			98-0%
Shuttle	MIM-T-LED-500	230/50Hz	2-500	T & LED-T	100-0%	100-4%	100-0%	90-0%	95-0%	100-0%	100-0%	100-5%	100-0%	100-5%	100-0%	90-0%	100-0%	100-0%	100-40%
Siemens	5TC8 284	230/50Hz	20-525	T			100-18%	100-18%	93-12%		100-20%	100-20%	100-20%	100-20%	100-18%	100-18%	100-41%		100-10%
Siemens	MG1-527-1AB	230/50Hz	20-500	KNX-U	100-0%	100-0%	100-0%	100-0%	95-0%	100-0%	100-19%	100-0%	100-19%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
theben	MAX 544 plus	230/50Hz	250	T	100-14%	100-21%	95-15%	95-15%	98-10%	100-13%	100-0%	100-9%	100-0%	100-9%	95-15%	95-15%	100-23%	100-24%	100-12%
theben	MIMAX 534 plus	230/50Hz	1-200	T	100-20%	100-19%	95-30%	95-30%	98-0%	100-1%	100-28%	100-37%	100-28%	100-37%	95-30%	95-30%	100-0%	100-3%	100-0%
VADSBO	LD 220	230/50Hz	1-200	U	100-0%	100-0%		100-35%						100-35%					99-0%
VARILIGHT	HQ3W	230/50Hz	400		100-0%	100-46%	100-20%		91-0%	100-11%	100-19%	100-5%	100-19%	100-5%	100-20%		100-0%	100-21%	100-0%
VARILIGHT	JQP401W	230/50Hz	400	T			100-0%	95-0%	91-17%	100-22%	100-0%	100-0%	100-0%	100-0%	95-0%		100-0%		100-0%
Vimar	20135	230/50Hz	3 - 100	U	100-0%	100-0%	100-15%	100-20%	95-18%	100-24%	100-19%	100-19%	100-19%	100-19%	100-15%	100-20%			99-0%
ZANO	WH401	230/50Hz	400	L			95-0%		72-0%	100-0%	100-0%		100-0%		95-0%		100-0%	100-0%	93-0%
ZANO	WH251	230/50Hz	250		100-0%	100-0%	95-0%	95-0%	72-0%	100-0%	100-0%	100-0%	100-0%	95-0%	95-0%	100-0%	100-0%	93-0%	90-0%
ZANO	Z GRID 700	230/50Hz	250	LED	100-0%	100-0%													99-0%
ZANO	Z GRID 500	230/50Hz	500		100-0%	100-0%	90-0%		73-0%	100-0%	91-0%	100-0%	91-0%	100-0%	90-0%				99-0%

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 1-5
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com