

# PRODUCT DATASHEET

## SF BLKH EYELID 250 WT

SURFACE BULKHEAD EYELID | Attachable half-visor ring (IK10)



---

### Product features


- Eyelid ring for Surface Bulkhead
- Available for 250 mm and 300 mm Bulkhead version
- Available in black and white color
- Impact resistance: IK10



TECHNICAL DATA

Dimensions & Weight

Diameter	258 mm
Height	64.0 mm
Product weight	210.00 g

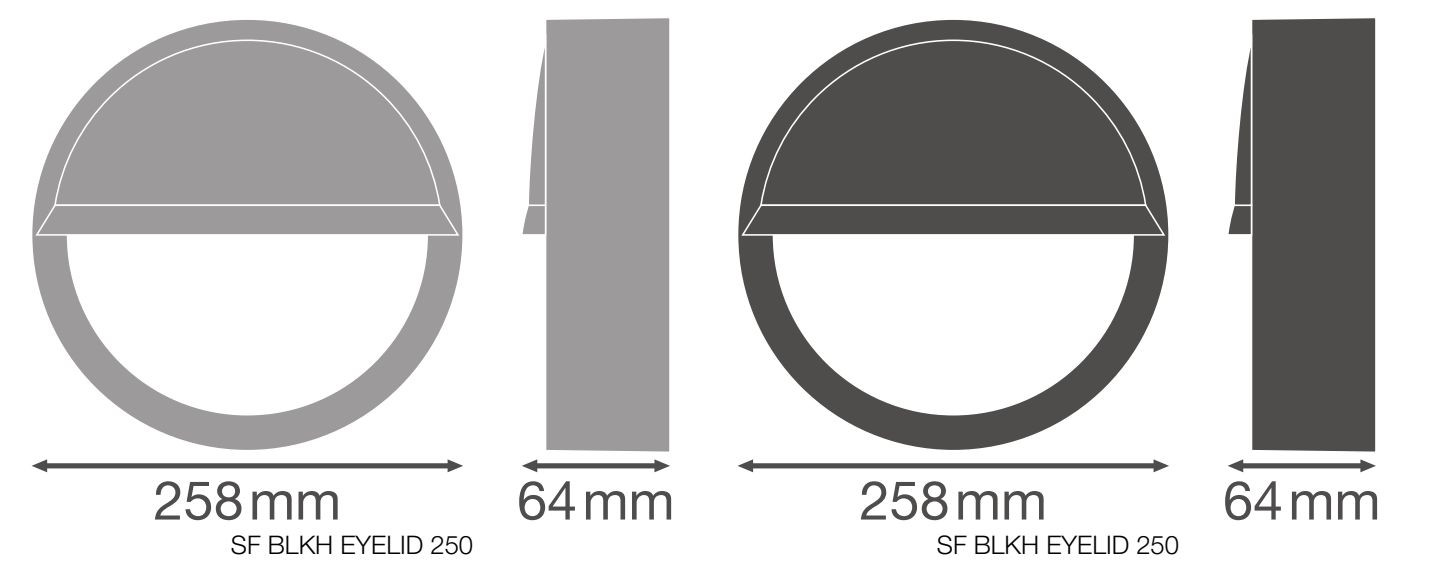

Materials & Colors

Product color	White
Cover material	Polycarbonate (PC)

Application & Mounting

Mounting location	Luminaire
Replaceable light source	No





Certificates & Standards

Luminaire with limited surface temperature, "D sign"	No
--	----

EQUIPMENT / ACCESSORIES

- Anti-theft screw included

## DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	SURFACE BULKHEAD
Photometric and lighting design files		Document name
	IES file (IES)	IES SF BLKH EYELID 250 WT 4000K
	IES file (IES)	IES SF BLKH EYELID 250 WT 3000K
Tender texts		Document name
	Tender documents	SURFACE BULKHEAD EYELID 250 WT-EN

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075375482	Folding box 1	74 mm x 272 mm x 262 mm	292.00 g	5.27 dm <sup>3</sup>
4058075375499	Shipping box 8	550 mm x 285 mm x 315 mm	2918.00 g	49.38 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.