

### RETAIL LAMPS PROGRAM 2021/2022

LEDVANCE is licensee of product trademark OSRAM for lamps products in general lighting.



### **CONTENT**



LED LAMPS 26



HALOGEN LAMPS 100



COMPACT FLUORESCENT LAMPS

106



FLUORESCENT LAMPS 116



SPECIAL LAMPS 126

# YOU & LEDVANCE MAKE YOUR BUSINESS GLOW!

LEDVANCE is your strong sales partner for innovative and high-volume lighting. And that applies not only to our wide range of modern LED luminaires and smart home products: We also offer one of the most extensive ranges of advanced LED lamps and conventional lighting products in the area of light sources. To market this segment, we will continue to leverage the strong tradition behind the OSRAM brand.

You are cordially invited: Discover LEDVANCE, the company, as well as our current lamp portfolio, sales-boosting marketing concepts and, most especially, all sorts of new impulses for your lighting business.



# WHY LEDVANCE? BECAUSE WE ARE ADVANCING LIGHT

LEDVANCE is one of the world's leading companies in the lighting industry. We want to build on our position – and further develop the lighting market together with our customers.

As technology trend experts, we are leading the way in meeting the rapidly changing demands for high-quality and long-lasting light. And as a strong local partner, we are proactive in our support for you in impressing your customers with innovative lighting ideas.

We help you to boost your lighting sales with attractive, user-friendly and intelligent lighting solutions. Let's go forward together and shape the future of light – with agility, courage, speed and flexibility.

### LEDVANCE MAKES THE DIFFERENCE



### **COOPERATIVE**

With a large, global sales team and more than 100 years of experience we are always by your side as a committed and cooperative partner.



### **TRENDSETTING**

Through regular market research we know at an early stage what interests customers – and where lighting trends are heading. A good example is our large selection of indoor and outdoor luminaires with sophisticated features for even greater lighting comfort.



### **COMPREHENSIVE**

Modern, smart, decorative, functional, robust and practical – our extensive portfolio meets customer requirements in all categories and virtually every area of application.



### UNIQUE

Fresh, dynamic, high-quality and unmistakable – the LEDVANCE brand and its powerful image stand out clearly from the competition and create feelings of affection and trust.



### **SALES-BOOSTING**

Attract attention, encourage purchases. We offer targeted support for your sales with creative, pre-tested marketing concepts.

### STRONG STARTING POSITION



### INNOVATION FROM TRADITION

We stand for progress and the desire to actively shape the future of light. We combine this courage to tread new paths with our experience from more than 100 years of lighting expertise.



### SUCCESSFUL SALES FROM A SINGLE SOURCE

LEDVANCE offers you everything from a single source – LED luminaires, lamps and Smart Home products. In all these areas we are setting new trends with innovative, market-driven products.



### FIRST-CHOICE PARTNER

With our extensive portfolio, powerful sales network and outstanding global access to markets we are the ideal strategic partner for your requirements.

### **GLOBAL PRESENCE**



Sales & Legal Entities

Sales

Not present

ACTIVE IN MORE THAN

140

**COUNTRIES** 

OFFICES IN MORE THAN

**50** 

COUNTRIES

# LIGHT IN ALL ITS DIVERSITY: OUR COMPLETE PORTFOLIO

Discover better light in all its diversity: modern LED lamps and conventional light sources, highly attractive, sales-boosting luminaires, smart lighting solutions for the smart home, the new user-friendly SUN@HOME HCL system\* and disinfecting UV-C light for a hygienic environment.



### **LAMPS**

LEDVANCE is your No. 1 partner for all lamps for general lighting purposes. Our comprehensive portfolio covers all customer requirements: from modern LED lamps for a wide variety of applications to conventional EUcompliant halogen and compact fluorescent lamps.



### **LUMINAIRES**

Demand for innovative LED luminaires continues on a steep growth curve. LEDVANCE offers you an extensive product range that is being continually expanded. In top quality, in many attractive designs, for indoors and outdoors, and with guarantees of up to 10 years.




### SMART+

With SMART<sup>+</sup>, you can offer your customers countless options for bathing their homes in intelligently networked light using voice control, an app or remote control and with Bluetooth, WiFi or Zigbee. And always perfectly tailored to meet the most widely diverse customer needs.



## **SLR/ELR:**KEY FACTS AT A GLANCE


The new EU regulations on ecodesign and the labeling of light sources are being implemented in phases, starting back in December 2019. Our products, packaging and product information comply fully with these EU regulations so you are always on the right side of the law.

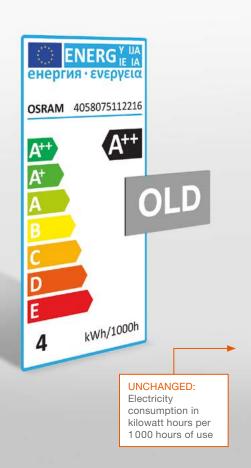



### HOW TO READ OUR PRODUCT TABLES

The new lighting regulation states that the new EU label indicating the energy efficiency class must be clearly visible on every product packaging. To make our product tables clearer and easier to read, the energy efficiency class isn't specified by a colored arrow but a letter. See on the right.



The EU has taken the next major step toward efficient and climate-friendly lighting – and defined new regulations for the sustainability of light sources and the labeling of their energy efficiency.

- Ecodesign Regulation 2019/2020 = Single Lighting Regulation (SLR)
- Energy Label Regulation 2019/2015 = Energy Labeling Regulation (ELR)

Also new: the EPREL product database which contains all the relevant information on the affected light sources. EPREL is also used for generating the new energy labels.

### WHICH PRODUCTS ARE AFFECTED? LIGHT SOURCES INSTEAD OF LAMPS AND LUMINAIRES

New: a distinction between "light sources" and "containing products".

### **LIGHT SOURCES**

are electrically operated products that emit white light. These include all traditional and LED lamps for general lighting – but also fully integrated luminaires from which light sources cannot be removed using commonly available tools without permanent damage. The new EU SLR/ELR regulations apply only to light sources.



### **CONTAINING PRODUCTS**

include luminaires and other equipment that allow the light source to be removed using commonly available tools without permanent damage. Most luminaires have therefore been exempt from the labeling regulations since December 25, 2019.

Good to know: LEDVANCE luminaires and SMART<sup>+</sup> luminaires are generally "containing products".



The energy efficiency of light sources is now calculated on a new basis. This results in the following:

- Further phase-out of a number of low-efficiency lamps
- Classification of light sources within the scale of the new energy label

### WHAT IS HAPPENING WHEN?

### **KEY DATES**



The new regulations and phase-out of many products will apply from this date.

Transition phase for the new label begins. Your existing products can be relabeled.

New LEDVANCE products will carry the new label.



**Final date:** From now on, all products must carry the new label; old products must be relabeled.



**Phase-out** of various linear T8 fluorescent lamps and halogen products.

LEDVANCE is already offering you products for simple replacement

From May 1, 2021 manufacturers have to register their light sources in the EPREL database and enter the required product data. LEDVANCE has already stored all the relevant products there. The phaseouts and introduction of the new energy label will then happen next.

### **HOW LEDVANCE WILL HELP YOU WITH YOUR PROJECTS**



By providing energy-efficient LED replacements for the affected products in good time



By reliably implementing all obligations for labeling and information – for example on packaging, on product data sheets and in operating instructions



By providing clear and comprehensive information so that you can be compliant, both technically and legally

Further informations at: www.ledvance.com/professional/services/eu-regulations

<sup>\*</sup> A large number of signaling and control lamps as well as very powerful lighting products (e.g. for outdoor, sports, theater or industrial lighting) are excluded from the EU regulations.

## PLASTIC-FREE LED LAMP PACKAGING



# GOOD FOR THE ENVIRONMENT – GOOD FOR YOUR BUSINESS

Our LED lamp packaging is more than just environmentally friendly. With shelf-ready trays, stable design, integrated hanger tabs and clear consumer information, they ensure more efficient handling and greater productivity at the shelf.

### **REAR HANGER TAB**

- Optimized shelf productivity compared with other hanging solutions and blisters
- Standardized euro hook perforation

### LEAVES NO ROOM FOR DOUBT: CUT-OUT WINDOW WITHOUT PLASTIC

The consumer sees cover, shape and finish of the lamp

### STRONG PROTECTION FOR THE LAMP

- Cut-out window only on the front side
- No additional bottom opening for more stability



### CLEAR CONSUMER GUIDANCE ON THE FRONT OF THE TRAYS

With photo-realistic product image and informational labels for wattage, light color and socket

### **REMOVABLE CARTON LID**

- Strong protection and stability
- Fast merchandising
- Also plastic-free

# EASY TO FIND: NO TIME WASTED FINDING THE RIGHT PRODUCT



### **QUICK, CLEAR CONSUMER INFORMATION ON THE FRONT**

- Wattage and reference wattage
- Lumens/Beam angle
- Lifetime in years
- Light color
- Dimmability (if relevant)



### FIND THE PERFECT LED REPLACE-**MENT WITH OUR WATTAGE CONCEPT**

Your customers know how bright a 60 W light bulb is, for example. Now they are looking for alternatives that offer the same brightness. To help them find them, the front of our packaging shows the wattages they are familiar with from classic incandescent lamps: 25 W, 40 W, 60 W, 75 W, 100 W or 150 W. So they immediately know precisely which LED alternative to take.

INCANDESCENT LAMP	•	LED SUPERSTAR STAR CLASSIC	NEW ENERGY EFFICIENCY CLASS
15 W	•	1.5 W	
25 W	•	2-2.8W	E-F
40 W	•	4.0-4.9 W	E-F
60 W	•	5.5-8.8W	E-F
75 W	•	7.5-10.5 W	D-F
100 W	•	11-12W	D
150 W	•	18 W	D

The power consumption needed to replace the wattage of a traditional incandescent light bulb varies among LED lamps, hence a range is sho The reason: The number of light-emitting diodes used varies from lamp

### **SAFETY INFORMATION:** SIMPLE, CLEAR, UNDERSTANDABLE

In 2004, the safety requirements for products began to be standardized throughout Europe. For consumers, this means more safety and transparency. With easy-tounderstand symbols on our products, packaging and inserts, we provide clarity and confidence in decisionmaking on lamp purchases, independent of language.



Open the packaging



Only for indoor use



Read the enclosed leaflet before use



Disconnect the luminaire from the power before relamping



Keep away from children



Only use in lamps with protective cover



Fit only by gripping the integrated control housing



Operation with shattered outer bulbs is not allowed





Do not touch the lamp with bare fingers



Special lamp, not suitable for use in household environments



Caution: hot



Lamp can be continuously



Protect against splashes



dimmed



Lamp with UV filter



Lamp cannot be dimmed



Inner temperature range



Lamp with limited dimming



Do not throw away with the household waste For more detailed information about compatible dimmers: www.ledvance.com/ professional/services/ led-lamps-compatibility

### THE POS SHELF CONCEPT PERFECTLY ARRANGED



### **OPTION 1:**

Product presentation in shelf-ready trays on shelves



Search, locate, buy: The primary shelves have a consistent design to provide modern, effective consumer guidance. Their lighting attracts even those customers who are far away. Once they've arrived at the shelf, customers see at first glance attractive product application images that convey the homelike and aesthetic qualities of our LED lamps.

At the same time, the shelves are designed for maximum efficiency: Shelf-ready trays or folding boxes on blister hooks ensure easy handling and maximum use of space. In the future, we'll also no longer be using plastics for our POS shelf communication wherever possible.

OPTION 2:

Product presentation on blister hooks



# THE DISPLAYS TURN HEADS, STIMULATE PURCHASES

Attention-grabbing, attractive and stimulating: The high-quality design of our secondary placements attract attention, inspire with their emotional motif and motivate customers to buy.

Floor display 1/2



CORDIN LED LAWRE
LECTOR JAMES
L

Floor display

trays 1/8

18

### Floor display trays 1/4



Floor display hooks 1/4



Floor display hooks 1/8




## THE NEW CONSUMER WEBSITE FROM LEDVANCE INFORMATION AND INSPIRATION

### WWW.LEDVANCE.COM/CONSUMER



Information, inspiration, fascination: Under the menu item "LED lamps", your customers will find not only the whole spectrum of our product range. They will also discover many attractive images that emotionally convey the effect and wide range of applications modern OSRAM branded LED lamps make possible.

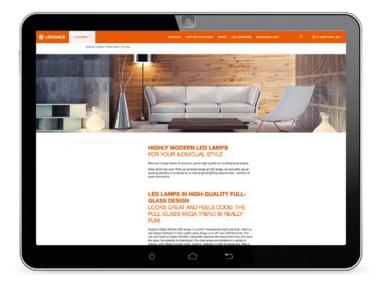

Information and inspiration create the basis for every sale. This is why we've redesigned our website to be even more modern, more comprehensive and more service oriented. Click by click, your customers learn about the extensive LEDVANCE product portfolio on the new LEDVANCE consumer website and receive helpful suggestions and tips all about lighting.

But LEDVANCE is not, of course, just heading down a "traditional" road. As a modern, dynamic company, we also use diverse social media channels so your customers always have the right information electronically!



Under the menu item "Products", you and your customers will find everything worth knowing about the LEDVANCE portfolio in compact form — including product-specific benefits and technical values.

Direct or indirect, stimulating or relaxing, white or in color: Every living area has very specific lighting requirements.

In the "Light for your home" section of our website, we provide your customers with practical tips on choosing the right lighting solution — with, of course, the relevant product recommendations.









In particular, the younger target groups continue to increasingly obtain information through social media channels. For this reason, LEDVANCE presents information about the company and its products on Facebook, Instagram and YouTube, which has been prepared specifically for these media channels.



### OUR RANGE OF LUMINAIRES HAS BEEN GREATLY EXPANDED

The market segment of LED luminaires continues its inexorable growth. We are leading the way here and have expanded our range of LED luminaires to include numerous products and product groups. Each of our luminaires offers superior quality, exceptional functionality, impressive design and an excellent price/performance ratio.

Among the highlights are a variety of new SMART<sup>+</sup> compatible luminaires for indoors and outdoors and a completely new LED luminaire portfolio for the bathroom. Discover the full range in our latest luminaire catalog.



Find more information about our LEDVANCE branded luminaires portfolio at www.ledvance.com/consumer/led-luminaires and in our product brochure.



### THE NEW SMART<sup>+</sup> PROGRAM: BIGGER THAN EVER BEFORE

More and more customer groups are joining the trend toward smart lighting. We were involved in this development from an early stage – and now we're expanding our SMART<sup>+</sup> range with a number of new, market-oriented products.

Smart light for indoors and outdoors, a huge selection of lamps, luminaires, LED strips and accessories, connectivity via Zigbee, WiFi or Bluetooth, and operation via voice control, an app or remote control.

Discover all the facets of SMART<sup>+</sup> in our latest catalog.

In addition to a number of new smart luminaires, the range includes a greatly expanded selection of SMART<sup>+</sup> lamps to cover virtually every customer requirement – for example the brandnew SMART<sup>+</sup> WiFi lamps in the filament look and with RGBW functionality.



Find more information about our LEDVANCE branded SMART<sup>+</sup> portfolio at **www.ledvance.com/consumer/smart** or in our product brochure.



Health and well-being are among the major issues of our time. Our response to this challenge is SUN@HOME, the innovative and easy-to-use human centric lighting (HCL) solution for everyone – guaranteed to boost your sales. The system comprises a wide range of specially designed lamps, luminaires and the free LEDVANCE SMART+ WiFi app for intuitive control.

### NATURAL LIGHT FOR THE HOME

Each SUN@HOME product offers very good color rendering (CRI>95), significantly reduced blue component and a light temperature spectrum from 2 200 to 5 500 K. Its quality of light is therefore very close to that of natural sunlight.

Another positive feature is that with the aid of the app the lighting can be automatically adjusted to simulate changes in natural daylight and align with personal biorhythms. The result is a completely new experience:


- More energized and focused during the day
- More relaxed in the evening
- Better quality of sleep and optimized sleep rhythm
- Excellent visual comfort





Even better quality of life thanks to clean, hygienic air All SUN@HOME luminaires have an innovative coating that removes germs, bacteria, fungi and unpleasant odors from the air.

Discover LEDVANCE SUN@HOME now at: www.ledvance.com/sunathome

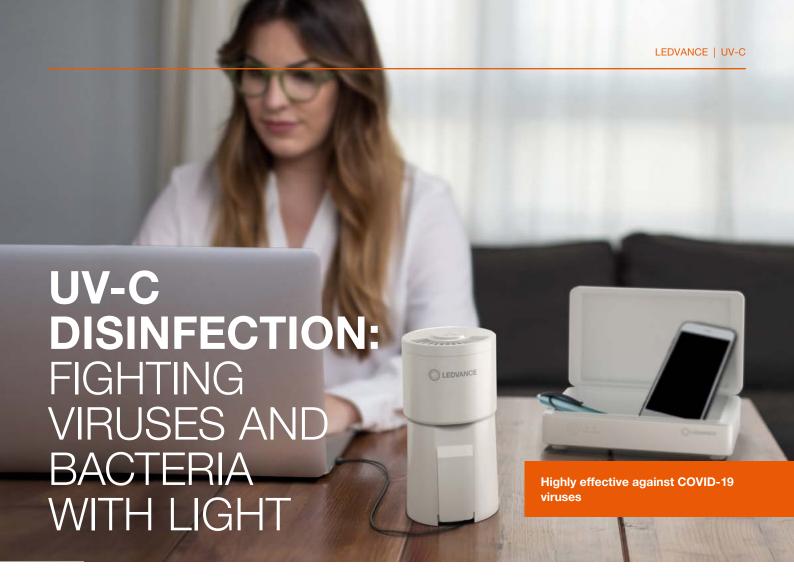

### UV-C - THE HIGHLY EFFICIENT AND ECO-FRIENDLY WAY TO FIGHT MICROBES

UV-C light is capable of purifying air, water or surfaces, killing 99.9 % of viruses, bacteria or fungi without using chemicals or toxic compounds. The rays can also be used very effectively against pollen, microdust and bad odors.

Until recently, UV-C has been used mainly in professional applications and with great success. LEDVANCE has now developed products for the consumer market that meet the current need for hygiene and safety.

### Smart prevention with the UV-C disinfection box

Simply place anything you want to disinfect in the box – your keys, smartphone, pens, etc. – and close the lid. The UV-C light will disinfect them all in just a few minutes – whether the surface is smooth or porous.

### Breathe easy with the UV-C air purifier

Small, lightweight and mobile, it filters up to 99.9 % of viruses and bacteria out of the air. The UV-C air purifier is perfect for the home, office or small shops.

Take advantage of this opportunity and help your customers to keep their surroundings germ-free.




Find more information at

www.ledvance.com/consumer/products/product-stories/uv-c-disinfection



### **LED LAMPS**



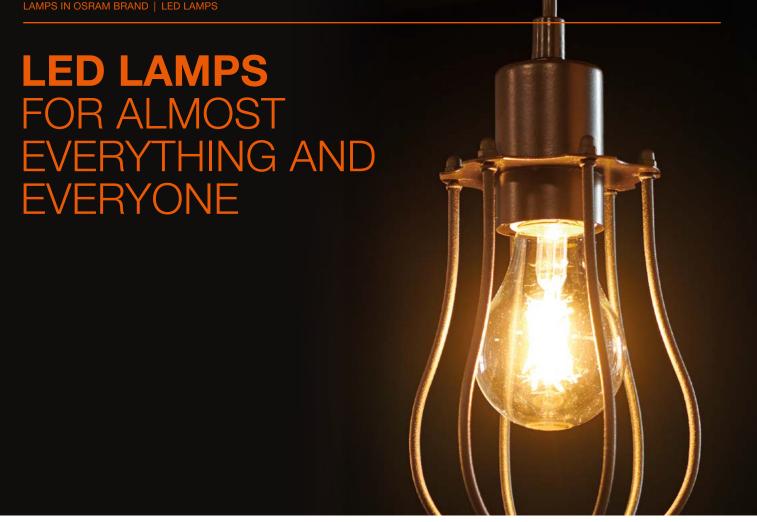

### LED LAMPS IN CLASSIC SHAPE AND REFLECTOR LAMPS

Lamp selection made easy with our quality categories: Segmenting the product range into clear quality levels helps your customers quickly and easily find the ideal LED replacement for their needs.

### **LED SUPERSTAR**

### Dimmable<sup>1</sup> high-tech LED lamps for the highest demands

- Lifetime of up to 25 years<sup>2</sup>
- Comprehensive classic, spot and reflector portfolio in the coveted full-glass design
- LED classic lamps with attractive filament technology (clear and frosted)
- LED PAR16 reflector lamps: Glass housing with a single spot lens makes it the ideal replacement for spot halogen reflector lamps
- Four-year guarantee<sup>3</sup>

### **LED STAR**

### First-class LED lamps for versatile everyday use

- Lifetime of up to 15 years<sup>2</sup>
- Good color rendering: CRI ≥ 80
- Filament technology: up to 360° beam angle for classic shapes
- Three-year guarantee<sup>3</sup>

### LED LAMPS WITH ADDITIONAL **FUNCTION**

### State-of-the-art LED lamps with attractive added functionality now in full-glass

- LED STAR+ 3STEP DIM: Dimming without a dimmer
- LED STAR+ GLOW DIM: The color temperature changes when dimming
- LED STAR+ RELAX & ACTIVE: : warm and cool light in one lamp
- LED STAR+ DAYLIGHT SENSOR and MOTION SENSOR: Lamps with integrated daylight and/or motion sensors
- LED RGBW remote control: Colored light with remote control

With our comprehensive portfolio you can offer your customers a huge selection of products to cover virtually any requirement: LED lamps in all classic shapes, LED reflector lamps, LED lamps with attractive additional functions, LED lamps in a vintage design, LED decor and special lamps, LED tubes and – the latest addition – LED COMFORT LIGHT.

We are constantly revising our range and developing it further. Our portfolio of LED lamps has never been larger or more varied.

### THREE LIGHT COLORS - YOUR CUSTOMERS GET TO CHOOSE

From cozy and warm to functional and cool: With warm white, cool white and cool daylight, OSRAM branded LED lamps always have the right light color.







### **LED VINTAGE EDITION 1906**

### Cool retro style with innovative LED technology

- Lifetime of up to 15 years<sup>2</sup>
- Now also featuring a spiral filament in a cool smoked-glass look

### **DECORATIVE LED LAMPS**

Colored or glare-reduced light in classic designs that use LED filament technology.

### **SPECIAL LED LAMPS**

High-quality LED lamps for special areas of application.

### **LED TUBES**

The modern, energy-efficient alternative to conventional T8 fluorescent lamps.

### Available in two categories:

SubstiTUBE STAR EM as the LED replacement for CCG luminaires and SubstiTUBE STAR Universal as the replacement for both CCG and ECG luminaires.

### Valid for all SubstiTUBE:

- A lifetime of up to 50 years<sup>2</sup>
- Full-glass design
- Instant full brightness without warm-up and flickering
- Simple, fast and safe replacement without rewiring

### **LED COMFORT LIGHT**

**New:** LED COMFORT LIGHT offers energy-efficient LED lighting with the quality of natural daylight.

- Natural light spectrum with outstanding color rendering of CRI > 90
- Greatly reduced blue component very close to natural sunlight
- Improved visual comfort and reduced eye strain
- All lamps dimmable
- Excellent energy efficiency

### **EVEN MORE CUSTOMER NEEDS TO MEET?**


Your customers will quickly and easily find the ideal LED replacement for almost any lighting requirement in additional product groups.

LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on

www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets

<sup>2</sup> Corresponds to an average service life of 15 000/25 000/30 000/50 000 hours with daily operation of about 2.7 hours

<sup>3</sup> For the exact guarantee terms and conditions that apply to consumers, please refer to www.ledvance.com/consumer/services/guarantee

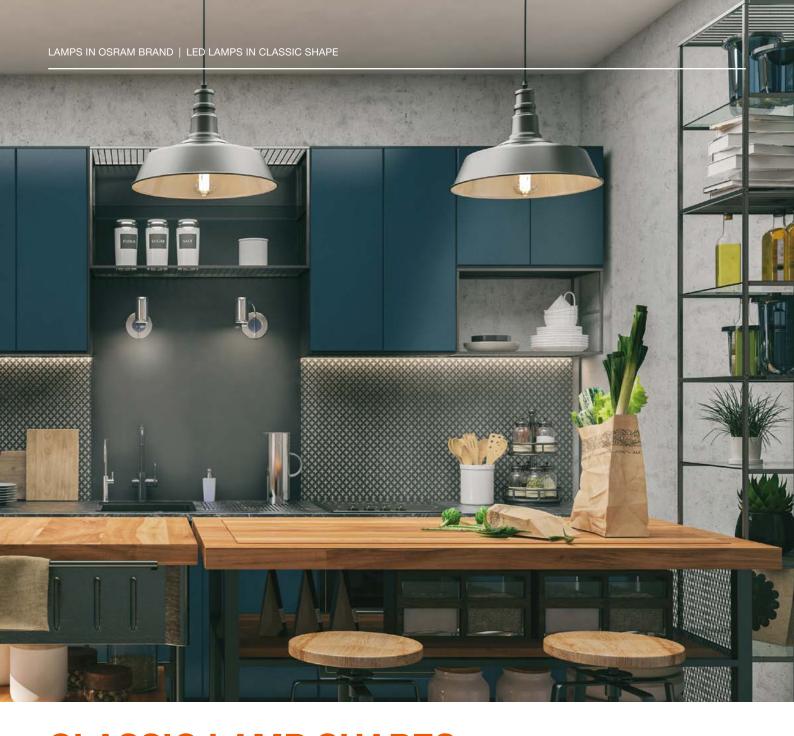

### CLASSIC LAMP SHAPES: YESTERDAY'S DESIGN WITH TODAY'S LIGHT

High-quality design, attractive filament look, brilliant, highly efficient light. Inspire your customers with a huge selection of LED lamps in classic shapes. All the usual wattages, different base sizes, dimmable or non-dimmable, clear or frosted, different light temperatures – never before have there been so many choices.

The latest additions to the range is the first ever LED CLASSIC A 200 lamp in full-glass.



























Product name	GTIN (EAN)	No.	w≙W	W	lm	2		(A)	fint '		Ød		<b>a</b>
		No.		<u> </u>					4	[mm]	[mm]		
LED SUPERSTAR CLASSIC A FILAMENT GLASS E27, 220-240V, Clear, Folding box													4 year guarantee
LED SUPERSTAR Classic A FIL 25	4058075 <b>211261</b>	1	25	2.2	250	E	Warm White		15000	105	60	1	6
LED SUPERSTAR Classic A FIL 40	4058075 <b>211322</b>	2	40	4.8	470	F	Warm White	<b>√</b>	15000	105	60	1	6
LED SUPERSTAR Classic A FIL 60	4058075 <b>115958</b>	3	60	6.5	806	E	Warm White	<b>√</b>	15000	105	60	1	6
LED SUPERSTAR Classic A FIL 75	4058075 <b>436886</b>	4	75	7.5	1055	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A FIL 75	4058075 <b>434967</b>	4	75	7.5	1 055	D	Cool White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A FIL 100	4058075 <b>245907</b>	4	100	11	1 521	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A FIL 100	4058075 <b>448100</b>	2	100	11	1 521	D	Cool White	✓	15000	105	60	1	6
B22d, 220-240V, Clear, Folding box													4 year guarantee
LED SUPERSTAR Classic A FIL 60	4058075 <b>448124</b>	5	60	6.5	806	Е	Warm White	✓	15000	104	60	1	6
E27, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR Classic A GL FR 25	4058075 <b>211346</b>	6	25	2.2	250	Е	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A GL FR 40	4058075 <b>054226</b>	6	40	4.8	470	F	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A GL FR 40	4058075 <b>434660</b>	7	40	4.8	470	F	Cool White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A GL FR 60	4058075 <b>054240</b>	6	60	6.5	806	Е	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A GL FR 60	4058075 <b>434608</b>	7	60	6.5	806	Е	Cool White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A GL FR 75	4058075 <b>112094</b>	6	75	7.5	1055	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A GL FR 75	4058075 <b>435001</b>	7	75	7.5	1055	D	Cool White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A GL FR 100	4058075 <b>245860</b>	6	100	11	1 521	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A GL FR 100	4058075 <b>434707</b>	6	100	11	1 521	D	Cool White	✓	15000	105	60	1	6
LED SUPERSTAR Classic A GL FR 150	4058075 <b>437326</b>	8	150	18	2452	D	Warm White	✓	15000	128	70	1	6
													Lityrace
B22d, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR Classic A GL FR 60	4058075 <b>434622</b>	9	60	6.5	806	Е	Warm White	✓	15000	104	60	1	6
LED SUPERSTAR Classic A GL FR 75	4058075 <b>448063</b>	9	75	7.5	1055	D	Warm White	✓	15000	104	60	1	6
LED SUPERSTAR Classic A GL FR 100	4058075 <b>245655</b>	10	100	11	1 521	D	Warm White	✓	15000	104	60	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.























Product name	GTIN (EAN)	No.	w≙W	W	lm	2		t[h]	[mm]	Ø d [mm]		<b>a</b>
LED STAR CLASSIC A FILAMENT GLASS E27, 220-240V, Clear, Folding box												3 year guarantee
LED STAR Classic A FIL 15	4058075 <b>461437</b>	1	15	1.5	136	F	Warm White	15 000	105	60	1	6
LED STAR Classic A FIL 25	4058075 <b>434165</b>	1	25	2.5	250	F	Warm White	15 000	105	60	1	6
LED STAR Classic A FIL 40	4058075 <b>112216</b>	2	40	4	470	Е	Warm White	15000	105	60	1	6
LED STAR Classic A FIL 40	4058075 <b>303386</b>	3	40	4	470	Е	Cool White	15000	105	60	1	6
LED STAR Classic A FIL 40	4058075 <b>466012</b>	3	40	4	470	Е	Cool Daylight	15000	105	60	1	6
LED STAR Classic A FIL 60	4058075 <b>112261</b>	2	60	6.5	806	Е	Warm White	15000	105	60	1	6
LED STAR Classic A FIL 60	4058075 <b>112308</b>	2	60	6.5	806	Е	Cool White	15000	105	60	1	6
LED STAR Classic A FIL 75	4058075 <b>112360</b>	5	75	7.5	1 055	D	Warm White	15000	105	60	1	6
LED STAR Classic A FIL 75	4058075 <b>112445</b>	5	75	7.5	1 055	D	Cool White	15000	105	60	1	6
LED STAR Classic A FIL 75	4058075 <b>466036</b>	2	60	6.5	806	Е	Cool Daylight	15000	105	60	1	6
LED STAR Classic A FIL 100	4058075 <b>124707</b>	6	100	11	1 521	D	Warm White	15000	105	60	1	6
LED STAR Classic A FIL 100	4058075 <b>435285</b>	6	100	11	1 521	D	Cool White	15000	105	60	1	6
LED STAR Classic A FIL 100	4058075 <b>466050</b>	6	100	11	1 521	D	Cool Daylight	15000	105	60	1	6
												u awyou
B22d, 220-240V, Clear, Folding box												3 year guarantee
LED STAR Classic A FIL 40	4058075 <b>592636</b>	4	40	4	470	Е	Cool White	15 000	104	60	1	6
LED STAR Classic A FIL 40	4058075 <b>435421</b>	4	40	4	470	Е	Warm White	15 000	104	60	1	10
LED STAR Classic A FIL 60	4058075 <b>114876</b>	4	60	7	806	Е	Warm White	15 000	104	60	1	10
LED STAR Classic A FIL 60	4058075 <b>592674</b>	4	60	6.5	806	Е	Cool White	15 000	104	60	1	6
LED STAR Classic A FIL 75	4058075 <b>592711</b>	7	75	7.5	1 055	D	Cool White	15 000	104	60	1	6
LED STAR Classic A FIL 100	4058075 <b>592773</b>	7	100	11	1 521	D	Cool White	15 000	104	60	1	6
												Hower
E27, 220-240V, Clear, two-pack folding box												3 year guarantee
LED STAR Classic A FIL 40	4058075 <b>330214</b>	2	40	4	470	Е	Warm White	15000	105	60	2	6
LED STAR Classic A FIL 60	4058075 <b>330191</b>	2	60	6.5	806	Е	Warm White	15000	105	60	2	6
LED STAR Classic A FIL 100	4058075 <b>330474</b>	6	100	11	1 521	D	Warm White	15000	105	60	2	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.



LED STAR Classic A GL FR 60















Product name	GTIN (EAN)	O E No.	w≙W	W	lm	2 00000		t <sub>[h]</sub> <sup>3</sup>		Ø d [mm]		
LED STAR CLASSIC A FILAMENT GLASS 227, 220-240V, Frosted, Folding box												3
LED STAR Classic A GL FR 15	4058075 <b>434066</b>	1	15	1.5	136	F	Warm White	15 000	105	60	1	6
.ED STAR Classic A GL FR 25	4058075 <b>446991</b>	1	25	2.5	250	F	Warm White	15 000	105	60	1	6
ED STAR Classic A GL FR 40	4058075 <b>112469</b>	1	40	4	470	Е	Warm White	15000	105	60	1	6
ED STAR Classic A GL FR 40	4058075 <b>303409</b>	1	40	4	470	Е	Cool White	15000	105	60	1	6
ED STAR Classic A GL FR 40	4058075 <b>466074</b>	1	40	4	470	Е	Cool Daylight	15000	105	60	1	6
ED STAR Classic A GL FR 60	4058075 <b>112506</b>	1	60	6.5	806	Е	Warm White	15000	105	60	1	6
ED STAR Classic A GL FR 60	4058075 <b>115897</b>	1	60	6.5	806	Е	Cool White	15000	105	60	1	6
ED STAR Classic A GL FR 60	4058075 <b>466098</b>	1	60	6.5	806	Е	Cool Daylight	15000	105	60	1	6
ED STAR Classic A GL FR 75	4058075 <b>115910</b>	1	75	7.5	1 055	D	Warm White	15000	105	60	1	6
ED STAR Classic A GL FR 75	4058075 <b>115934</b>	1	75	7.5	1 055	D	Cool White	15000	105	60	1	6
ED STAR Classic A GL FR 100	4058075 <b>124660</b>	1	100	11	1 521	D	Warm White	15000	105	60	1	6
ED STAR Classic A GL FR 100	4058075 <b>434028</b>	1	100	11	1 521	D	Cool White	15000	105	60	1	6
ED STAR Classic A GL FR 100	4058075 <b>435445</b>	1	100	11	1 521	D	Cool Daylight	15000	105	60	1	6
ED STAR Classic A GL FR 150	4058075 <b>305014</b>	3	150	17	2452	D	Warm White	15000	118	70	1	6
ED STAR Classic A GL FR 150	4058075 <b>305038</b>	3	150	17	2452	D	Cool White	15000	118	70	1	6
ED STAR Classic A GL FR 200	4058075 <b>619074</b>	4	200	24	3 4 5 2	D	Warm White	15000	162	95	1	4
ED STAR Classic A GL FR 200	4058075 <b>619098</b>	4	200	24	3 4 5 2	D	Cool White	15000	162	95	1	4
22d, 220-240V, Frosted, Folding box ED STAR Classic A GL FR 40	4058075 <b>437241</b>	2	40	4	470	E	Warm White	15000	104	60	1	6
ED STAR Classic A GL FR 40	4058075 <b>592650</b>	2	40	4	470	Е	Cool White	15 000	104	60	1	6
ED STAR Classic A GL FR 60	4058075 <b>114913</b>	2	60	6.5	806	Е	Warm White	15 000	104	60	1	6
ED STAR Classic A GL FR 60	4058075 <b>592698</b>	2	60	6.5	806	Е	Cool White	15 000	104	60	1	6
ED STAR Classic A GL FR 75	4058075 <b>592735</b>	2	75	7.5	1 055	D	Warm White	15 000	104	60	1	6
ED STAR Classic A GL FR 75	4058075 <b>592759</b>	2	75	7.5	1 055	D	Cool White	15 000	104	60	1	6
ED STAR Classic A GL FR 100	4058075 <b>124684</b>	2	100	11	1 521	D	Warm White	15 000	104	60	1	6
ED STAR Classic A GL FR 100	4058075 <b>592797</b>	2	100	11	1 521	D	Cool White	15 000	104	60	1	6
27, 220-240V, Frosted, two-pack folding box												3
ED STAR Classic A FR 40	4058075 <b>132856</b>	1	40	4	470	Е	Warm White	15000	105	60	2	6
ED STAR Classic A FR 60	4058075 <b>132832</b>	1	60	6.5	806	Е	Warm White	15000	105	60	2	6
ED STAR Classic A FR 60	4058075 <b>435384</b>	1	60	6.5	806	Е	Cool White	15000	105	60	2	6
ED STAR Classic A FR 75	4058075 <b>289635</b>	1	75	7.5	1 055	D	Warm White	15000	105	60	2	6
	4058075 <b>435308</b>	1	75	7.5	1 055	D	Cool White	15 000	105	60	2	6
ED STAR Classic A FR 75					1 501	D	Warm White	15 000	105	0.0		
ED STAR Classic A FR 75 ED STAR Classic A FR 100	4058075 <b>434042</b>	1	100	11	1 521	D	waiiii wiiito	13 000	100	60	2	6

60

6.5

806

Warm White 15000

104

60

4058075**435407** 

6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.







3







GTIN (EAN)	No.	w≙W	W	lm	2			t <sub>M</sub> '	[mm]	Ø d [mm]		<b>6</b>
												4 year guarantee
4058075 <b>436824</b>	1	25	2.8	250	F	Warm White	✓	15000	97	35	1	6
4058075 <b>437043</b>	2	40	5	470	F	Warm White	✓	15000	97	35	1	10
4058075 <b>434943</b>	2	40	4.8	470	F	Cool White	✓	15000	97	35	1	6
												4 year guarantee
4058075 <b>446878</b>	3	40	4.8	470	F	Warm White	✓	15000	95	35	1	6
	4058075 <b>436824</b> 4058075 <b>437043</b> 4058075 <b>434943</b>	4058075 <b>436824</b> 1 4058075 <b>437043</b> 2 4058075 <b>434943</b> 2	4058075436824 1 25 4058075437043 2 40 4058075434943 2 40	4058075 <b>436824</b> 1 25 2.8 4058075 <b>437043</b> 2 40 5 4058075 <b>434943</b> 2 40 4.8	4058075 <b>43682</b> 4 1 25 2.8 250 4058075 <b>437043</b> 2 40 5 470 4058075 <b>434943</b> 2 40 4.8 470	4058075 <b>436824</b> 1 25 2.8 250 F 4058075 <b>437043</b> 2 40 5 470 F 4058075 <b>434943</b> 2 40 4.8 470 F	4058075 <b>436824</b> 1 25 2.8 250 F Warm White 4058075 <b>437043</b> 2 40 5 470 F Warm White 4058075 <b>434943</b> 2 40 4.8 470 F Cool White	4058075436824 1 25 2.8 250 F Warm White ✓ 4058075437043 2 40 5 470 F Warm White ✓ 4058075434943 2 40 4.8 470 F Cool White ✓	4058075 <b>436824</b> 1 25 2.8 250 F Warm White ✓ 15000 4058075 <b>437043</b> 2 40 5 470 F Warm White ✓ 15000 4058075 <b>434943</b> 2 40 4.8 470 F Cool White ✓ 15000	4058075 <b>43682</b> 4 1 25 2.8 250 F Warm White ✓ 15000 97 4058075 <b>437043</b> 2 40 5 470 F Warm White ✓ 15000 97 4058075 <b>434943</b> 2 40 4.8 470 F Cool White ✓ 15000 97	4058075436824 1 25 2.8 250 F Warm White ✓ 15000 97 35 4058075437043 2 40 5 470 F Warm White ✓ 15000 97 35 4058075434943 2 40 4.8 470 F Cool White ✓ 15000 97 35	4058075 <b>436824</b> 1 25 2.8 250 F Warm White ✓ 15000 97 35 1 4058075 <b>437043</b> 2 40 5 470 F Warm White ✓ 15000 97 35 1 4058075 <b>434943</b> 2 40 4.8 470 F Cool White ✓ 15000 97 35 1

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.















	GTIN (EAN)	No.	w≙W	W	lm	Page 2		Constant of the second of the	t <sub>[h]</sub>	[mm]	Ø d [mm]		<b>6</b>		
LASSIC B FILAMENT GLASS sted, Folding box													4 year		
assic B GL FR 25	4058075 <b>437005</b>	1	25	2.8	250	F	Warm White	✓	15000	97	35	1	6		
assic B GL FR 40	4058075 <b>436985</b>	1	40	4.8	470	F	Warm White	✓	15000	97	35	1	6		
assic B GL FR 60	4058075 <b>434486</b>	1	60	5.5	806	Е	Warm White	✓	15000	100	35	1	6		
ar/Frosted, Folding box													4 year guarantee		
assic BA FIL 40	4058075 <b>434561</b>	2	40	4	470	Е	Warm White	✓	15000	121	35	1	6		
assic BA GL FR 40	4058075 <b>434585</b>	3	40	4	470	Е	Warm White	✓	15000	121	35	1	6		
sted, Folding box													4 year guarantee		
assic B GL FR 40	4058075 <b>435025</b>	4	40	4.8	470	F	Warm White	✓	15000	95	35	1	6		
osted, Folding box													4 year guarantee		
assic B GL FR 40	4058075 <b>434509</b>	5	40	4.8	470	F	Warm White	✓	15000	94	35	1	10		
osted, Folding box			-	-		•							1		

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.





















Product name	GTIN (EAN)	No.	w≙W	W	lm	2		<b>t</b> M		Ø d [mm]		
LED STAR CLASSIC B FILAMENT GLASS E14, 220-240V, Clear, Folding box												3 year
LED STAR Classic B FIL 15	4058075 <b>436701</b>	1	15	1.5	136	F	Warm White	15 000	100	35	1	6
LED STAR Classic B FIL 25	4058075 <b>330498</b>	1	25	2.5	250	F	Warm White	15 000	100	35	2	6
LED STAR Classic B FIL 25	4058075 <b>436688</b>	1	25	2.5	250	F	Warm White	15 000	100	35	1	6
LED STAR Classic B FIL 25	4058075 <b>434141</b>	1	25	2.5	250	F	Cool White	15 000	100	35	1	6
LED STAR Classic B FIL 40	4058075 <b>436589</b>	2	40	4	470	Е	Warm White	15000	100	35	1	6
LED STAR Classic B FIL 40	4058075 <b>330511</b>	2	40	4	470	Е	Warm White	15000	100	35	2	6
LED STAR Classic B FIL 40	4058075 <b>437142</b>	2	40	4	470	Е	Cool White	15000	100	35	1	6
LED STAR Classic B FIL 40	4058075 <b>435261</b>	2	40	4	470	Е	Cool White	15000	100	35	2	6
LED STAR Classic B FIL 40	4058075 <b>466135</b>	2	40	4	470	Е	Cool Daylight	15000	100	35	1	6
LED STAR Classic B FIL 60	4058075 <b>434981</b>	2	60	5.5	806	D	Warm White	15000	100	35	1	6
Dog 1 000 040V 01												3 year guarantee
B22d, 220-240V, Clear, Folding box	4050075454000				050		147 1471 7	15000		0.5		
LED STAR Classic B FIL 25	4058075 <b>451636</b>	3	25	2.5	250	F	Warm White	15 000	91	35	1	6
LED STAR Classic B FIL 40	4058075 <b>437166</b>	4	40	4	470	E	Warm White	15000	91	35	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.















Product name	GTIN (EAN)	No.	w≙W	W	lm	2		<b>t</b> M		Ø d [mm]		<b>a</b>
LED STAR CLASSIC B FILAMENT GLASS E14, 220-240V, Clear, Folding box												3 year
LED STAR Classic BA FIL 25	4058075 <b>436640</b>	1	25	2.5	250	F	Warm White	15 000	121	35	1	6
LED STAR Classic BA FIL 40	4058075 <b>434226</b>	2	40	4	470	E	Warm White	15 000	121	35	1	6
E14, 220-240V, Clear, Folding box												3 year guarantee
LED STAR Classic BW FIL 25	4058075 <b>436565</b>	3	25	2.5	250	F	Warm White	15000	100	35	1	6
LED STAR Classic BW FIL 40	4058075 <b>434202</b>	4	40	4	470	Е	Warm White	15000	100	35	1	6
E27, 220-240V, Clear, Folding box												3 year guarantee
LED STAR Classic B FIL 40	4058075 <b>435223</b>	5	40	4	470	Е	Warm White	15000	92	35	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.

















Product name	GTIN (EAN)	No.	w≙W	W	lm	2		<b>t</b> hi '		Ø d [mm]		<b>3</b>
LED STAR CLASSIC B FILAMENT GLASS E14, 220-240V, Frosted, Folding box												3 ye guarante
LED STAR Classic B GL FR 15	4058075 <b>434189</b>	1	15	1.5	136	F	Warm White	15 000	100	35	1	6
LED STAR Classic B GL FR 25	4058075 <b>436664</b>	1	25	2.5	250	F	Warm White	15 000	100	35	1	6
LED STAR Classic B GL FR 25	4058075 <b>436466</b>	1	25	2.5	250	F	Cool White	15 000	100	35	1	6
LED STAR Classic B GL FR 40	4058075 <b>436503</b>	1	40	4	470	Е	Warm White	15000	100	35	1	6
LED STAR Classic B GL FR 40	4058075 <b>437128</b>	1	40	4	470	Е	Cool White	15000	100	35	1	6
LED STAR Classic B GL FR 40	4058075 <b>446786</b>	1	40	4	470	Е	Cool Daylight	15000	100	35	1	6
LED STAR Classic B GL FR 60	4058075 <b>435513</b>	2	60	5.5	806	D	Warm White	15000	100	35	1	6
E27, 220-240V, Frosted, Folding box LED STAR Classic B GL FR 40	4058075 <b>437265</b>	3	40	4	470	E	Warm White	15000	92	35	1	3 guarante
B22d, 220-240V, Frosted, Folding box												3 ye guaranti
LED STAR Classic B GL FR 25	4058075 <b>436428</b>	4	25	2.5	250	F	Warm White	15 000	91	35	1	6
LED STAR Classic B GL FR 40	4058075 <b>437227</b>	4	40	4	470	E	Warm White	15000	91	35	1	6
E14, 220-240V, Frosted, two-pack folding box												3 yearsete
LED STAR Classic B FR 25	4058075 <b>143494</b>	1	25	2.5	250	F	Warm White	15 000	100	35	2	6
LED STAR Classic B FR 40	4058075 <b>132870</b>	1	40	4	470	Е	Warm White	15000	100	35	2	6
LED STAR Classic B FR 40	4058075 <b>435247</b>	1	40	4	470	Е	Cool White	15000	100	35	2	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.























Product name	GTIN (EAN)	No.	w≙W	W	lm	2 BBB 2		(A)	t <sub>[h]</sub>	[mm]	Ø d [mm]		品
LED SUPERSTAR CLASSIC P FILAMENT GLASS E14, 220-240V, Clear, Folding box													4 yearsante
LED SUPERSTAR Classic P FIL 25	4058075 <b>436862</b>	1	25	2.8	250	F	Warm White	✓	15000	78	45	1	6
LED SUPERSTAR Classic P FIL 40	4058075 <b>437029</b>	2	40	4.8	470	F	Warm White	✓	15000	78	45	1	6
LED SUPERSTAR Classic P FIL 40	4058075 <b>434868</b>	2	40	4.8	470	F	Cool White	✓	15000	78	45	1	6
LED SUPERSTAR Classic P FIL 60	4058075 <b>447875</b>	2	60	6.5	806	Е	Warm White	✓	15000	78	45	1	6
E27, 220-240V, Clear, Folding box													4 yearsante
LED SUPERSTAR Classic P FIL 25	4058075 <b>436848</b>	3	25	2.8	250	F	Warm White	✓	15000	77	45	1	6
LED SUPERSTAR Classic P FIL 40	4058075 <b>436800</b>	3	40	5	470	F	Warm White	✓	15000	77	45	1	6
LED SUPERSTAR Classic P FIL 40	4058075 <b>434844</b>	3	40	4.8	470	F	Cool White	✓	15000	77	45	1	6
													4 yes
E14, 220-240V, Frosted, Folding box													guarante
LED SUPERSTAR Classic P GL FR 25	4058075 <b>436961</b>	4	25	2.8	250	F	Warm White	✓	15000	78	45	1	6
LED SUPERSTAR Classic P GL FR 40	4058075 <b>436923</b>	4	40	4.8	470	F	Warm White	✓	15000	78	45	1	6
LED SUPERSTAR Classic P GL FR 40	4058075 <b>434646</b>	4	40	4.8	470	F	Cool White	✓	15000	78	45	1	6
LED SUPERSTAR Classic P GL FR 60	4058075 <b>447837</b>	5	60	6.5	806	Е	Warm White	✓	15000	78	45	1	6
LED SUPERSTAR Classic P GL FR 60	4058075 <b>434684</b>	5	60	6.5	806	Е	Cool White	✓	15000	78	45	1	6
E27, 220-240V, Frosted, Folding box													4 yes
LED SUPERSTAR Classic P GL FR 25	4058075 <b>436947</b>	6	25	2.8	250	F	Warm White	✓	15000	77	45	1	6
LED SUPERSTAR Classic P GL FR 40	4058075 <b>436909</b>	6	40	4.8	470	F	Warm White	✓	15000	77	45	1	6
B22d, 220-240V, Frosted, Folding box													4 yes
LED SUPERSTAR Classic P GL FR 40	4058075 <b>437289</b>	7	40	5	470	F	Warm White	<b>√</b>	15 0 0 0	76	45	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.





















Product name	GTIN (EAN)	No.	w≙W	W	lm	2		t <sub>[h]</sub>		Ø		<b>a</b>
		No.								(min)		
LED STAR CLASSIC P FILAMENT GLASS E14, 220-240V, Clear, Folding box												3 year guarantee
LED STAR Classic P FIL 15	4058075 <b>434349</b>	1	15	1.5	136	F	Warm White	15 000	77	45	1	6
LED STAR Classic P FIL 25	4058075 <b>436602</b>	1	25	2.5	250	F	Warm White	15 000	77	45	1	6
LED STAR Classic P FIL 25	4058075 <b>434103</b>	1	25	2.5	250	F	Cool White	15 000	77	45	1	6
LED STAR Classic P FIL 40	4058075 <b>436527</b>	2	40	4	470	Е	Warm White	15000	77	45	1	6
LED STAR Classic P FIL 40	4058075 <b>435209</b>	2	40	4	470	Е	Cool White	15000	77	45	1	6
LED STAR Classic P FIL 40	4058118 <b>166602</b>	2	40	4.5	470	Е	Cool Daylight	15000	80	45	1	6
LED STAR Classic P FIL 60	4058075 <b>447936</b>	2	60	5.5	806	D	Warm White	15000	77	45	1	6
E14, 220-240V, Clear, two-pack folding box												
LED STAR Classic P FIL 40	4058075 <b>434288</b>	2	40	4	470	E	Warm White	15 0 0 0	77	45	2	6
												- Lucy of
E27, 220-240V, Clear, Folding box												3 year guarantee
LED STAR Classic P FIL 15	4058075 <b>434325</b>	3	15	1.5	136	F	Warm White	15 000	77	45	1	6
LED STAR Classic P FIL 25	4058075 <b>436541</b>	3	25	2.5	250	F	Warm White	15 000	77	45	1	6
LED STAR Classic P FIL 25	4058075 <b>434080</b>	3	25	2.5	250	F	Cool White	15 000	77	45	1	6
LED STAR Classic P FIL 40	4058075 <b>435162</b>	4	40	4	470	Е	Warm White	15000	77	45	1	6
LED STAR Classic P FIL 40	4058075 <b>435148</b>	4	40	4	470	Е	Cool White	15000	77	45	1	6
LED STAR Classic P FIL 40	4058075 <b>466197</b>	4	40	4	470	Е	Cool Daylight	15000	77	45	1	6
LED STAR Classic P FIL 60	4058075 <b>434882</b>	5	60	5.5	806	D	Warm White	15000	77	45	1	6
B22d, 220-240V, Clear, Folding box												3 year guarantee
LED STAR Classic P FIL 25	4058075 <b>450592</b>	6	25	2.5	250	F	Warm White	15 000	76	45	1	6
LED STAR Classic P FIL 40	4058075 <b>436381</b>	6	40	4	470	 E	Warm White	15000	76	45	1	6
	1000010100001											

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.

















Product name	GTIN (EAN)	No.	w≙W	W	lm	2 Babb		<b>t</b> M	[mm]	Ø d [mm]		<b>3</b>
LED STAR CLASSIC P FILAMENT GLASS												urowsce 3 year
E14, 220-240V, Frosted, Folding box												
LED STAR Classic P GL FR 15	4058075 <b>450578</b>	1	15	1.5	136	F	Warm White	15 000	77	45	1	6
LED STAR Classic P GL FR 25	4058075 <b>436626</b>	1	25	2.5	250	F	Warm White	15 000	77	45	1	6
LED STAR Classic P GL FR 25	4058075 <b>436404</b>	1	25	2.5	250	F	Cool White	15 000	77	45	1	6
LED STAR Classic P GL FR 40	4058075 <b>436480</b>	1	40	4	470	E	Warm White	15000	77	45	1	6
LED STAR Classic P GL FR 40	4058075 <b>437081</b>	1	40	4	470	E	Cool White	15000	77	45	1	6
LED STAR Classic P GL FR 40	4058075 <b>435186</b>	1	40	4	470	Е	Cool Daylight	15000	77	45	1	6
LED STAR Classic P GL FR 60	4058075 <b>434929</b>	2	60	5.5	806	D	Warm White	15 000	77	45	1	6
E27, 220-240V, Frosted, Folding box												3 year guarantee
LED STAR Classic P GL FR 15	4058075 <b>434127</b>	3	15	1.5	136	F	Warm White	15 000	77	45	1	6
LED STAR Classic P GL FR 25	4058075 <b>436442</b>	3	25	2.5	250	F	Warm White	15 000	77	45	1	6
LED STAR Classic P GL FR 40	4058075 <b>437067</b>	3	40	4	470	E	Warm White	15000	77	45	1	6
LED STAR Classic P GL FR 40	4058075 <b>435124</b>	3	40	4	470	E	Cool White	15000	77	45	1	6
LED STAR Classic P GL FR 40	4058075 <b>466210</b>	3	40	4	470	E	Cool Daylight	15000	77	45	1	6
LED STAR Classic P GL FR 60	4058075 <b>434905</b>	3	60	5.5	806	D	Warm White	15000	77	45	1	6
												3 year guarantee
B22d, 220-240V, Frosted, Folding box												
LED STAR Classic P GL FR 25	4058075 <b>436367</b>	4	25	2.5	250	F	Warm White	15 000	76	45	1	6
LED STAR Classic P GL FR 40	4058075 <b>437104</b>	4	40	4	470	E	Warm White	15 0 0 0	76	45	1	6
E14, 220-240V, Frosted, two-pack folding box												3 year guarantee
LED STAR Classic P FR 25	4058075 <b>289673</b>	1	25	2.5	250	F	Warm White	15 000	77	45	2	6
LED STAR Classic P FR 40	4058075 <b>132894</b>	1	40	4	470	Е	Warm White	15000	77	45	2	6
E27, 220-240V, Frosted, two-pack folding box												3 year guarantee
LED STAR Classic P FR 40	4058075 <b>153660</b>	3	40	4	470	E	Warm White	15000	77	45	2	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.























Product name	GTIN (EAN)	No.	w≙W	W	lm	2 BBB			t[h]	[mm]	Ø d [mm]		<b>6</b>
LED SUPERSTAR CLASSIC GLOBE FILAMENT GLASS E27, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR Classic GLOBE95 GL FR 100	4058075 <b>112131</b>	1	100	12	1 521	D	Warm White	✓	15000	138	95	1	6
LED STAR CLASSIC GLOBE FILAMENT GLASS E27, 220-240V, Frosted/Clear, Folding box													3 year guarantee
LED STAR Classic GLOBE95 GL FR 60	4058075 <b>808713</b>	2	60	6.5	806	Е	Warm White	-	15000	135	95	1	6
LED STAR Classic GLOBE95 GL FR 100	4058075 <b>808515</b>	2	100	12	1 521	D	Warm White	-	15000	138	95	1	6
LED STAR Classic GLOBE95 GL FR 100	4058075 <b>605848</b>	2	100	11	1 521	D	Cool White	-	15000	135	95	1	6
LED STAR Classic GL0BE125 FIL 25	4052899 <b>962064</b>	3	25	2.5	250	F	Warm White	-	15000	168	124	1	4
LED STAR Classic GL0BE125 FIL 40	4052899 <b>972384</b>	4	40	4	470	Е	Warm White	-	15000	168	124	1	4
LED STAR Classic GL0BE125 FIL 60	4052899 <b>972377</b>	4	60	6.5	806	Е	Warm White	-	15000	168	124	1	4
LED STAR Classic GL0BE125 GL FR 60	4058075 <b>269866</b>	1	60	7	806	Е	Warm White	-	15000	173	125	1	4
LED STAR Classic GL0BE125 GL FR 100	4058075 <b>269880</b>	1	100	11	1 521	D	Warm White	-	15000	168	124	1	4
LED STAR Classic GLOBE125 GL FR 150	4058075 <b>601901</b>	1	150	17	2452	D	Cool White	-	15000	173	124	1	4
LED STAR CLASSIC EDISON FILAMENT GLASS E27, 220-240V, Clear, Folding box													3 year guarantee
LED STAR Classic EDISON FIL 25	4058075 <b>436763</b>	5	25	2.5	250	F	Warm White	-	15 000	143	64	1	6
LED STAR Classic EDISON FIL 40	4058075 <b>434424</b>	6	40	4	470	Е	Warm White	-	15 000	143	64	1	6
LED STAR Classic EDISON FIL 60	4058075 <b>434400</b>	6	60	6.5	806	Е	Warm White	-	15 000	143	64	1	6
E27, 220-240V, Frosted, Folding box													3 year guarantee
LED STAR Classic EDISON GL FR 40	4058075 <b>434387</b>	7	40	4	470	Е	Warm White	-	15000	143	64	1	6
LED STAR Classic EDISON GL FR 60	4058075 <b>434363</b>	7	55	6.5	730	Е	Warm White	-	15000	143	64	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.













Product name	GTIN (EAN)	No.	w≙W	W	lm	<sup>2</sup>			t[h]	[mm]	Ø d [mm]		<b>a</b>
LED SUPERSTAR CLASSIC A WITH HEATSINK E27, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR Classic A FR 40	4058075 <b>433861</b>	1	60	8.8	806	F	Warm White	✓	25 000	105	60	1	6
LED SUPERSTAR Classic A FR 75	4058075 <b>433809</b>	2	75	10.5	1 055	F	Warm White	✓	25 000	105	60	1	6
LED SUPERSTAR Classic A FR 100	4058075 <b>433823</b>	3	100	14	1 521	F	Warm White	✓	25 000	115	60	1	6
LED SUPERSTAR Classic A FR 150	4058075 <b>433847</b>	4	150	20	2452	Е	Warm White	<b>√</b>	25 000	141	70	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.























Product name	GTIN (EAN)	No.	w≙W	W	lm	2			t[h]	[mm]	Ø d [mm]		<b>a</b>
LED STAR CLASSIC A WITH HEATSINK E27, 220-240V, Frosted, Folding box													3 year guarantee
LED STAR Classic A FR 40	4058075 <b>127319</b>	1	40	4.9	470	F	Warm White	✓	15000	95	55	1	6
LED STAR Classic A FR 40	4058075 <b>304178</b>	1	40	4.9	470	F	Cool White	✓	15000	95	55	1	6
LED STAR Classic A FR 40	4058075 <b>304192</b>	1	40	4.9	470	F	Cool Daylight	✓	15000	95	55	1	6
LED STAR Classic A FR 60	4058075 <b>127357</b>	2	60	8.5	806	F	Warm White	✓	15000	113	60	1	6
LED STAR Classic A FR 60	4058075 <b>430693</b>	2	60	8.5	806	F	Cool White	✓	15000	113	60	1	6
LED STAR Classic A FR 60	4058075 <b>428560</b>	2	60	8.5	806	F	Cool Daylight	✓	15000	113	60	1	6
LED STAR Classic A FR 75	4058075 <b>122529</b>	3	75	10	1 055	F	Warm White	✓	15000	118	60	1	6
LED STAR Classic A FR 75	4058075 <b>304215</b>	3	75	10	1 055	F	Cool White	✓	15000	118	60	1	6
LED STAR Classic A FR 100	4058075 <b>127029</b>	4	100	13	1 521	F	Warm White	✓	15000	118	60	1	6
LED STAR Classic A FR 100	4058075 <b>304253</b>	4	100	13	1 521	F	Cool White	✓	15000	118	60	1	6
LED STAR Classic A FR 100	4058075 <b>304277</b>	4	100	13	1 521	Е	Cool Daylight	✓	15000	118	60	1	6
LED STAR Classic A FR 150	4058075 <b>245976</b>	5	150	19	2452	Е	Warm White	✓	15000	128	68	1	6
LED STAR Classic A FR 200	4058075 <b>659667</b>	6	200	24.9	3452	Е	Warm White	✓	15000	184	90	1	4
B22d, 220-240V, Frosted, Folding box													2 year guarantee
LED STAR Classic A FR 60	4058075 <b>127937</b>	7	60	8.5	806	F	Warm White	✓	15000	112	60	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.



















Product name	GTIN (EAN)	No.	w≙W	W	lm	P 2		3 3	t <sub>[h]</sub>	[mm]	Ø d [mm]		
LED SUPERSTAR CLASSIC B WITH HEATSINK E14, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR Classic B FR 40	4058075 <b>430914</b>	1	40	4.9	470	F	Warm White	✓	25 000	102	35	1	6
LED STAR CLASSIC B WITH HEATSINK E14, 220-240V, Frosted, Folding box													3 year guarantee
LED STAR Classic B FR 25	4058075 <b>430730</b>	2	25	3.3	250	G	Warm White	-	15 000	100	37	1	6
LED STAR Classic B FR 40	4058075 <b>431072</b>	3	40	4.9	470	F	Warm White	-	15 000	100	37	1	6
LED STAR Classic B FR 40	4058075 <b>431058</b>	3	40	4.9	470	F	Cool White	-	15000	100	37	1	6
LED STAR Classic B FR 40	4058075 <b>430976</b>	3	40	4.9	470	F	Cool Daylight	-	15000	100	37	1	6
LED STAR Classic B FR 60	4058075 <b>428546</b>	5	60	7	806	F	Warm White	-	15000	115	39	1	6
LED STAR CLASSIC B WITH HEATSINK B22d, 220-240V, Frosted, Folding box													3 year guarantee
LED STAR Classic B FR 40	4058075 <b>504240</b>	4	40	4.9	470	F	Warm White	-	15 000	100	37	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.

















Product name	GTIN (EAN)	No.	w≙W	W	lm	2			t <sub>[h]</sub> '	[mm]	Ø d [mm]		<b>6</b>
LED SUPERSTAR CLASSIC P WITH HEATSINK E14, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR Classic P FR 40	4058075 <b>430938</b>	1	40	4.9	470	F	Warm White	✓	25 000	80	45	1	6
LED STAR CLASSIC P WITH HEATSINK E14, 220-240V, Frosted, Folding box													3 year guarantee
LED STAR Classic P FR 25	4058075 <b>430990</b>	1	25	3.3	250	G	Warm White	-	15 000	85	45	1	6
LED STAR Classic P FR 40	4058075 <b>431096</b>	2	40	4.9	470	F	Warm White	-	15 000	82	45	1	6
LED STAR Classic P FR 40	4058075 <b>430815</b>	2	40	4.9	470	F	Cool White	-	15000	82	45	1	6
LED STAR Classic P FR 40	4058075 <b>431010</b>	2	40	4.9	470	F	Cool Daylight	-	15000	82	45	1	6
LED STAR Classic P FR 60	4058075 <b>428522</b>	3	60	7	806	F	Warm White	-	15000	90	47	1	6
E27, 220-240V, Frosted, Folding box													3 year guarantee
LED STAR Classic P FR 40	4058075 <b>431034</b>	4	40	4.9	470	F	Warm White	-	15 000	82	45	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.


















Product name	GTIN (EAN)	No.	w≙W	W	lm			t <sub>[h]</sub> <sup>3</sup>		Ød		
		No.							[mm]	[mm]		
LED STAR STICK FLAME E14/E27, 220-240V, Frosted, Folding box												3 year guarantee
LED STAR Classic STICK FR 0,5 E14	4058075 <b>389885</b>	1	-	0.5	10	F	Warm Comfort Light	15000	145	45	1	4
LED STAR Classic STICK FR 0,5 E27	4058075 <b>389908</b>	2	-	0.5	10	F	Warm Comfort Light	15000	147	45	1	4
LED STAR STICK E14, 220-240V, Frosted, Folding box												3 year guarantee
LED STAR Classic STICK FR 60	4058075 <b>428362</b>	3	60	8	806	F	Warm White	15000	118	36	1	6
LED STAR Classic STICK FR 60	4058075 <b>428423</b>	3	60	8	806	F	Cool White	15000	118	36	1	6
LED STAR Classic STICK FR 75	4058075 <b>428386</b>	3	75	9	1050	Е	Warm White	15000	118	36	1	6
LED STAR Classic STICK FR 75	4058075 <b>428409</b>	3	75	9	1 050	Е	Cool White	15000	118	36	1	6
LED STAR Classic STICK FR 75	4058075 <b>466272</b>	3	75	9	1 050	Е	Cool Daylight	15000	118	36	1	6
E27, 220-240V, Frosted, Folding box												3 year guarantee
LED STAR Classic STICK FR 60	4058075 <b>428447</b>	4	60	8	806	F	Warm White	15000	116	36	1	6
LED STAR Classic STICK FR 60	4058075 <b>059153</b>	4	60	8	806	F	Warm White	15000	116	36	1	6
LED STAR Classic STICK FR 60	4058075 <b>428508</b>	4	60	8	806	F	Cool White	15000	116	36	1	6
LED STAR Classic STICK FR 60	4058075 <b>059177</b>	4	60	8	806	F	Cool White	15000	116	36	1	6
LED STAR Classic STICK FR 75	4058075 <b>428461</b>	4	75	9	1 050	Е	Warm White	15000	116	36	1	6
LED STAR Classic STICK FR 75	4058075 <b>059191</b>	4	75	9	1 050	F	Warm White	15000	116	36	1	6
LED STAR Classic STICK FR 75	4058075 <b>428485</b>	4	75	9	1 050	Е	Cool White	15000	116	36	1	6
LED STAR Classic STICK FR 75	4058075 <b>059214</b>	4	75	9	1 050	F	Cool White	15000	116	36	1	6
LED STAR Classic STICK FR 75	4058075 <b>466258</b>	4	75	9	1 050	Е	Cool Daylight	15000	116	36	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.

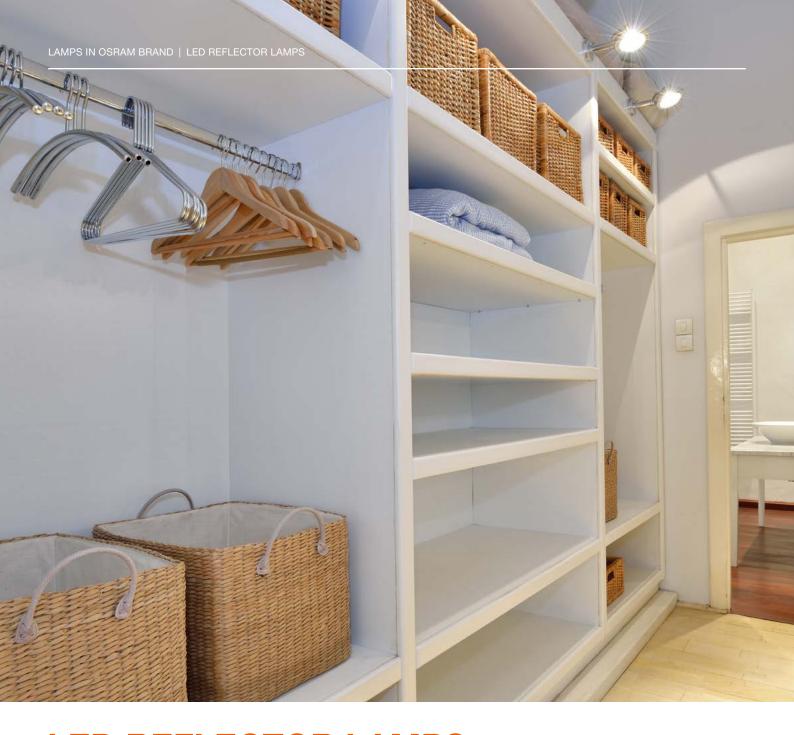

### LED REFLECTOR LAMPS: WE'VE GOT EVERY CUSTOMER REQUIREMENT COVERED

Modern LED light has long since established itself as the new standard in reflector lamps as well. With their high-quality full-glass design and innovative single optic for excellent light distribution, our LED reflector lamps fulfill customer needs brilliantly.

Our broad range of products includes all relevant wattages, dimmable and non dimmable lamps, and various light temperatures. OSRAM branded LED reflector lamps are also available with all bases and for all areas of application. In short: an ideal package of performance, design and quality!













Product name	GTIN (EAN)	No.	w≙W	W	lm	cd	2		<b>3</b>		t <sub>[h]</sub>		Ø d [mm]		
LED SUPERSTAR PAR16 GU10, 220-240V, Folding box															4 year guarantee
LED SUPERSTAR PAR16 35 dim 36°	4058075 <b>431676</b>	1	35	3.4	230	630	G	Warm White	✓	36	25 000	54	51	1	6
LED SUPERSTAR PAR16 35 dim 36°	4058075 <b>431690</b>	1	35	3.4	230	630	G	Cool White	✓	36	25 000	54	51	1	6
LED SUPERSTAR PAR16 50 dim 36°	4058075 <b>112544</b>	1	50	4.5	350	690	F	Warm White	✓	36	25 000	54	51	1	6
LED SUPERSTAR PAR16 50 dim 36°	4058075 <b>431713</b>	1	50	4.5	350	690	F	Cool White	✓	36	25 000	54	51	1	6
LED SUPERSTAR PAR16 80 dim 36°	4058075 <b>433663</b>	1	80	8.3	575	840	G	Warm White	✓	36	25 000	52	50	1	6
LED SUPERSTAR PAR16 80 dim 36°	4058075 <b>453661</b>	1	80	8.3	575	840	G	Cool White	✓	36	25 000	52	50	1	6
LED SUPERSTAR PAR16 80 dim 120°	4058075 <b>433687</b>	2	51	7.9	650	210	G	Warm White	✓	120	25 000	52	50	1	6
LED SUPERSTAR PAR16 80 dim 120°	4058075 <b>433700</b>	2	51	7.9	650	210	G	Cool White	✓	120	25 000	52	50	1	6
E14, 220-240V, Folding box															4 year guarantee
LED SUPERSTAR PAR16 50 dim 36°	4058075 <b>433144</b>	3	50	4.8	350	600	F	Warm White	✓	36	25 000	73	50	1	6
GU10, 220-240V, two-pack folding box															4 year guarantee
LED SUPERSTAR PAR16 35 dim 36°	4058075 <b>458086</b>	1	35	3.4	230	630	G	Warm White	✓	36	25 000	54	51	2	6
LED SUPERSTAR PAR16 50 dim 36°	4058075 <b>589025</b>	1	50	4.5	350	690	F	Warm White	✓	36	25 000	54	51	2	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.

















Product name	GTIN (EAN)	No.	w≙W	W	lm	cd	<sup>2</sup>			t[h]	[mm]	Ø d [mm]		<b>a</b>
LED STAR PAR16														a nowso
GU10, 220-240V, Folding box														3 year guarantee
LED STAR PAR16 35 non-dim 36°	4058075 <b>233263</b>	1	35	2.6	230	400	F	Warm White	36	15 000	52	50	1	6
LED STAR PAR16 35 non-dim 36°	4058075 <b>431737</b>	1	35	2.6	230	400	F	Cool White	36	15 000	52	50	1	6
LED STAR PAR16 50 non-dim 36°	4058075 <b>112568</b>	1	50	4.3	350	600	F	Warm White	36	15 000	52	50	1	6
LED STAR PAR16 50 non-dim 36°	4058075 <b>112582</b>	1	50	4.3	350	600	F	Cool White	36	15 000	52	50	1	6
LED STAR PAR16 50 non-dim 120°	4058075 <b>303263</b>	2	30	4.3	350	100	G	Warm White	120	15 000	56	50	1	6
LED STAR PAR16 50 non-dim 120°	4058075 <b>303287</b>	2	30	4.3	350	100	G	Cool White	120	15 000	56	50	1	6
LED STAR PAR16 80 non-dim 36°	4058075 <b>112605</b>	1	80	6.9	575	880	F	Warm White	36	15 000	52	50	1	6
LED STAR PAR16 80 non-dim 36°	4058075 <b>453647</b>	1	80	6.9	575	880	F	Cool White	36	15 000	52	50	1	6
LED STAR PAR16 80 non-dim 120°	4058075 <b>431751</b>	3	49	6.9	620	180	F	Warm White	120	15 000	52	50	1	6
LED STAR PAR16 80 non-dim 120°	4058075 <b>431775</b>	3	49	6.9	620	180	F	Cool White	120	15 000	52	50	1	6
E14, 220-240V, Folding box														3 year guarantee
LED STAR PAR16 50 non-dim 36°	4058075 <b>433168</b>	4	50	4.5	350	700	F	Warm White	36	10 000	73	50	1	6
GU10, 220-240V, two, three-pack folding box														3 year guarantee
LED STAR PAR16 GL 35 non-dim 36°	4058075 <b>452497</b>	1	35	2.6	230	400	F	Warm White	36	15 000	52	50	3	6
LED STAR PAR16 GL 35 non-dim 36°	4058075 <b>466296</b>	1	35	2.6	230	400	F	Cool Daylight	36	15 000	52	50	1	6
LED STAR PAR16 GL 50 non-dim 36°	4058075 <b>452527</b>	1	50	4.3	350	600	F	Warm White	36	15 000	52	50	3	6
LED STAR PAR16 GL 50 non-dim 36°	4058075 <b>466319</b>	1	50	4.3	350	600	F	Cool Daylight	36	15 000	52	50	1	6
LED STAR PAR16 35 non-dim 36°	4058075 <b>260238</b>	1	35	2.6	230	400	F	Warm White	36	15 000	52	50	2	6
LED STAR PAR16 50 non-dim 36°	4058075 <b>260252</b>	1	50	4.3	350	600	F	Warm White	36	15 000	52	50	2	6
LED STAR PAR16 50 non-dim 36°	4058075 <b>452473</b>	1	50	4.3	350	600	F	Cool White	36	15 000	52	50	2	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.













Product name	GTIN (EAN)	No.	w≙W	W	lm	cd	PA PA		3		t <sub>[h]</sub>		Ø d [mm]		<b>3</b>
LED SUPERSTAR PAR20															FEDWACE
E27, 220-240V, Folding box															4 year guarantee
LED SUPERSTAR PAR20 50 dim 36°	4058075 <b>433120</b>	1	50	6.4	350	750	G	Warm White	✓	36	25 000	88	65	1	6
LED PARATHOM PAR30 E27, 220-240V, Folding box															5 year guarantee
PARATHOM PAR30 75 dim 36°	4058075 <b>264304</b>	2	75	10	633	1600	G	Warm White	✓	36	25 000	91	95	1	6
LED PARATHOM PAR38 E27, 220-240V, Folding box														4	
PARATHOM PAR38 120 dim 30°	4058075 <b>264083</b>	4	120	12.5	1 0 3 5	2600	G	Warm White	✓	30	25 000	134	120	1	6
PARATHOM PAR38 120 non-dim 15°	4058075 <b>264069</b>	3	120	12.5	1035	4500	F	Warm White	-	15	25 000	134	120	1	6
PARATHOM PAR38 120 non-dim 30°	4058075 <b>264106</b>	4	120	12.5	1 035	2600	F	Warm White	-	30	25 000	134	120	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.











Product name	GTIN (EAN)	No.	w≙W	W	lm	cd	Page 2		o s		t[h]		Ø d [mm]		<b>3</b>
LED SUPERSTAR R50 E14, 220-240V, Folding box															4 year guarantee
LED SUPERSTAR R50 60 dim 36°	4058075 <b>125940</b>	1	60	5.9	350	607	G	Warm White	✓	36	25 000	85	50	1	6
LED SUPERSTAR R63 E27, 220-240V, Folding box															4 year guarantee
LED SUPERSTAR R63 60 dim 36°	4058075 <b>126008</b>	2	60	5.9	350	582	G	Warm White	✓	36	25 000	102	63	1	6
LED SUPERSTAR R80 E27, 220-240V, Folding box														3 guaran	year guarantee
LED SUPERSTAR R80 60 dim 36°	4058075 <b>433328</b>	3	60	5.9	350	607	G	Warm White	✓	36	25 000	113	80	1	6
LED SUPERSTAR R80 100 dim 36°	4058075 <b>433281</b>	3	100	9.6	670	1300	G	Warm White	✓	36	25 000	113	80	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.















Product name	GTIN (EAN)	No.	w≙W	W	lm	cd	2			t <sub>M</sub>		Ø d [mm]		<b>a</b>
LED STAR R39 E14, 220-240V, Folding box														3 y
LED STAR R39 25 non-dim 36°	4058075 <b>433243</b>	1	25	1.5	110	248	F	Warm White	36	15 000	70	39	1	6
LED STAR R50 E14, 220-240V, Folding box														3 ye guarante
LED STAR R50 25 non-dim 36°	4058075 <b>125902</b>	2	25	1.5	110	248	F	Warm White	36	15 000	85	50	1	6
LED STAR R50 40 non-dim 36°	4058075 <b>125926</b>	2	40	2.6	210	398	F	Warm White	36	15000	85	50	1	6
LED STAR R50 40 non-dim 36°	4058075 <b>433342</b>	2	40	2.6	210	398	F	Cool White	36	15000	85	50	1	6
LED STAR R50 60 non-dim 36°	4058075 <b>126022</b>	2	60	4.3	350	582	F	Warm White	36	15000	85	50	1	6
LED STAR R50 GLASS E14, 220-240V, two-pack folding box														3 guaranti
LED STAR R50 25 non-dim 36°	4058075 <b>096820</b>	2	25	1.5	110	248	F	Warm White	36	15 000	85	50	2	6
LED STAR R50 40 non-dim 36°	4058075 <b>096882</b>	2	40	2.6	210	398	F	Warm White	36	15000	85	50	2	6
LED STAR R63 E27, 220-240V, Folding box														3 ye guarant
LED STAR R63 40 non-dim 36°	4058075 <b>125964</b>	3	40	2.6	210	398	F	Warm White	36	15000	102	63	1	6
LED STAR R63 60 non-dim 36°	4058075 <b>125988</b>	3	60	4.3	350	582	F	Warm White	36	15 000	101.5	63	1	6
E27, 220-240V, two-pack folding box														3 ye guarant
LED STAR R63 40 non-dim 36°	4058075 <b>096981</b>	3	40	2.6	210	398	F	Warm White	36	15000	102	63	2	6
LED STAR R63 60 non-dim 36°	4058075 <b>097049</b>	3	60	4.3	350	582	F	Warm White	36	15000	101.5	63	2	6
LED STAR R80 GLASS E27, 220-240V, Folding box														3 ye
LED STAR R80 60 non-dim 36°	4058075 <b>433304</b>	4	60	4.3	350	582	F	Warm White	36	15 000	113	80	1	6
LED STAR R80 100 non-dim 36°	4058075 <b>433267</b>	4	100	9.1	670	1 300	G	Warm White	36	15000	113	80	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.













Product name	GTIN (EAN)	No.	w≙W	W	lm	cd	S S S S S S S S S S S S S S S S S S S		6		t <sub>[h]</sub> <sup>5</sup>		Ø d [mm]		<b>a</b>
LED SUPERSTAR MR16 GLASS GU5.3, 12V <sup>1</sup> , Folding box															4 year
LED SUPERSTAR MR16 20 dim 36°	4058075 <b>431799</b>	1	20	3.4	230	560	G	Warm White	✓	36	25 000	46	51	1	6
															4 year
LED SUPERSTAR MR16 35 dim 36°	4058075 <b>112643</b>	1	35	4.9	350	560	G	Warm White	✓	36	25 000	46	51	1	6
LED SUPERSTAR MR16 35 dim 36°	4058075 <b>431836</b>	1	35	4.9	350	560	G	Cool White	✓	36	25 000	46	51	1	6
LED SUPERSTAR MR16 50 dim 36°	4058075 <b>433724</b>	2	50	8	621	1000	G	Warm White	✓	36	25 000	46	51	1	6
LED SUPERSTAR MR16 50 dim 36°	4058075 <b>433748</b>	2	50	8	621	1 000	G	Cool White	✓	36	25 000	46	51	1	6
LED STAR MR16 GLASS GU5.3, 12V <sup>1</sup> , Folding box															3 year
LED STAR MR16 20 dim 36°	4058075 <b>431393</b>	1	20	2.6	230	680	F	Warm White	-	36	15 000	46	51	1	6
LED STAR MR16 20 dim 36°	4058075 <b>431850</b>	1	20	2.6	230	680	F	Cool White	-	36	15000	46	51	1	6
LED STAR MR16 35 dim 36°	4058075 <b>431270</b>	1	35	3.8	350	790	F	Warm White	-	36	15000	46	51	1	6
LED STAR MR16 35 dim 36°	4058075 <b>431171</b>	1	35	3.8	350	790	F	Cool White	-	36	15000	46	51	1	6
LED STAR MR16 50 dim 36°	4058075 <b>433762</b>	3	50	8	621	1 000	G	Warm White	-	36	15000	46	51	1	6
LED STAR MR16 50 dim 36°	4058075 <b>433786</b>	3	50	8	621	1000	G	Cool White	-	36	15000	46	51	1	6
LED STAR MR16 GLASS GU5.3, 12V <sup>1</sup> , two-pack folding box															3 year
LED STAR MR16 35 dim 36°	4058075 <b>260276</b>	1	35	3.8	350	790	F	Warm White	-	36	15 000	46	51	2	6

¹ Compatible with many commercially available electronic drivers. Details can be found under www.ledvance.com/consumer/services/downloads/ | ² You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | ³ Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | ⁴ LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | ⁵ Average lifespan in hrs.




1





Product name	GTIN (EAN)	No.	w≙W	W	lm	cd	3		4		t[h]	[mm]	Ø d [mm]		<b>3</b>
LED SUPERSTAR MR11 GLASS GU4, 12V¹, Folding box															4 year guarantee
LED SUPERSTAR MR11 20 dim 36°	4058075 <b>433083</b>	1	20	3.2	184	400	G	Warm White	✓	36	25 000	38	35	1	6
LED SUPERSTAR MR11 35 dim 36°	4058075 <b>433229</b>	1	35	4.5	345	600	G	Warm White	✓	36	25 000	38	35	1	6
LED STAR MR11 GLASS GU4, 12V <sup>1</sup> , Folding box															3 year guarantee
LED STAR MR11 20 non-dim 36°	4058075 <b>433403</b>	1	20	2.5	184	400	G	Warm White	-	36	15000	38	35	1	6
LED STAR MR11 35 non-dim 36°	4058075 <b>433380</b>	1	35	4.2	345	600	F	Warm White	-	36	15000	38	35	1	6

¹ Compatible with many commercially available electronic drivers. Details can be found under www.ledvance.com/consumer/services/downloads/ | ² You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | ³ Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | ⁴ LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | ⁵ Average lifespan in hrs.

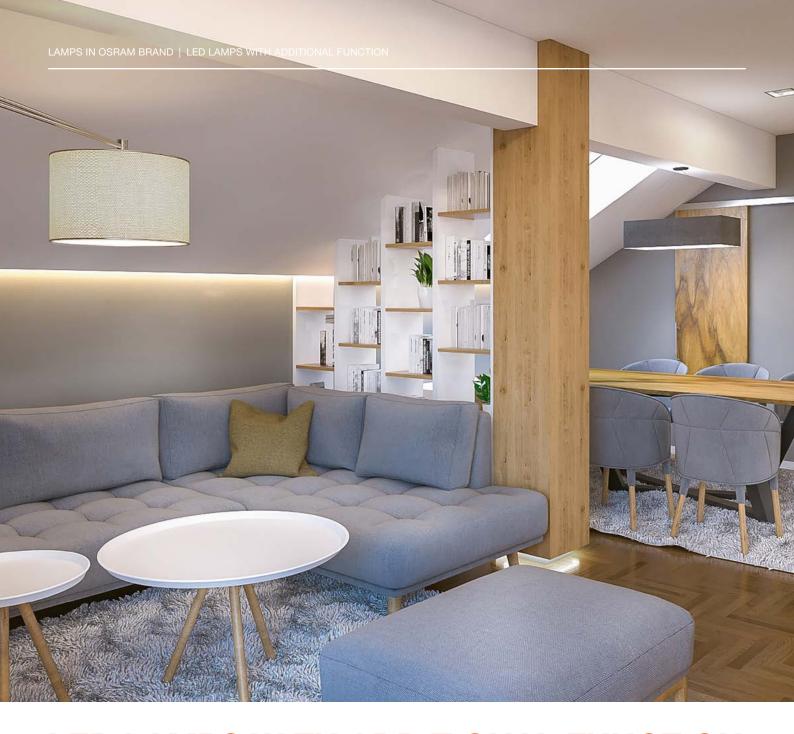

## LED LAMPS WITH ADDITIONAL FUNCTION: CLEVER AND EASY TO USE

The LED lamps from the STAR+ portfolio impress customers with their large selection of intelligent added functions. The range of these products stretches from LED lamps with integrated motion sensor to light with very good color rendering through to RGBW lamps whose colors can be controlled remotely on a whim. And most importantly – always to suit the needs of your customers.



#### LED STAR+ 3STEP DIM: DIMMING WITHOUT A DIMMER

The clever 3STEP DIM technology makes it all possible: LED light can now be adjusted to create a specific mood – without having to install a dimmer. The lamps can be dimmed in three stages: 100 %, 45 % and 15 %. This is easily controlled using a standard wall switch.















Product name	GTIN (EAN)	No.	w≙W	W	(lm)	cd	2			t <sub>[h]</sub> <sup>3</sup>		Ø d [mm]		
LED STAR+ THREE STEP DIM E27, 220-240V, Clear, Folding box														4 year guarantee
LED STAR+ Classic A FIL 60 3xDim	4058075 <b>436787</b>	1	60	7	806	-	Е	Warm White	300	15000	105	60	1	4
E14, 220-240V, Clear, Folding box														4 year guarantee
LED STAR+ Classic B FIL 40 3xDim	4058075 <b>434462</b>	2	40	4	470	-	E	Warm White	300	15000	97	35	1	4
LED STAR+ Classic P FIL 40 3xDim	4058075 <b>434448</b>	3	40	4	470	-	E	Warm White	320	15000	78	45	1	4
GU10, 220-240V, Folding box														3 year guarantee
LED STAR+ PAR16 50 36° 3xDim	4058075 <b>433182</b>	4	50	4.5	350	750	F	Warm White	36	15000	54	50	1	4
G9, 220-240V, Clear, Folding box														4 year guarantee
LED STAR+ PIN 40 G9 3xDIM	4058075 <b>432277</b>	5	40	4	470	-	Е	Warm White	320	25000	59	18	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.



## **LED STAR+ GLOW DIM:**DIM DOWN FOR EXTRA WARM LIGHT



LED lamps with GLOW DIM technology don't just get darker when you dim them down: The light color also changes from warm white (2700 K) to extra warm white (up to 1800 K).

This lets your customers enjoy cozy feel-good lighting while saving maximum energy. This is easily controlled using a standard dimmer; a remote control is not required.

<sup>&</sup>lt;sup>1</sup> LED lamps can be operated with a wide variety of commercially available dimmers; for details and results from compatibility tests, please refer to www.ledvance.com/ professional/services/led-lamps-compatibility/dimming-conformity and the additional technical product information sheets linked there




















Product name	GTIN (EAN)	No.	w≙W	W	lm	cd			3		t <sub>[h]</sub>	[mm]	Ø d [mm]		品
LED STAR+ GLOWDIM E27, 220-240V, Clear, Folding box															4 year guarantee
LED STAR+ Classic A FIL 40 GLOWdim	4058075 <b>435568</b>	1	40	4.5	470	-	Е	Tunable Warm White	✓	300	15 000	105	60	1	4
LED STAR+ Classic A FIL 60 GLOWdim	4058075 <b>435537</b>	1	60	7	806	-	Е	Tunable Warm White	✓	300	15 000	105	60	1	4
E14, 220-240V, Clear, Folding box															4 year guarantee
LED STAR+ Classic B FIL 40 GLOWdim	4058075 <b>435490</b>	2	40	4.5	470	-	Е	Tunable Warm White	✓	300	15 000	118	35	1	4
LED STAR+ Classic P FIL 40 GLOWdim	4058075 <b>435476</b>	3	40	4.5	470	-	Е	Tunable Warm White	✓	300	15 000	110	45	1	4
E27, 220-240V, Clear, Folding box															4 year guarantee
LED STAR+ Classic GLOBE125 FIL 60 GLOWdim	4058075 <b>808942</b>	4	60	7	806	-	Е	Tunable Warm White	✓	300	15 000	168	124	1	4
GU10, 220-240V, Folding box															4 year guarantee
LED STAR+ PAR16 GLD 35 GLOWdim 36°	4058075 <b>433366</b>	5	50	4.5	350	750	F	Warm White	✓	36	25 000	54	50	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.

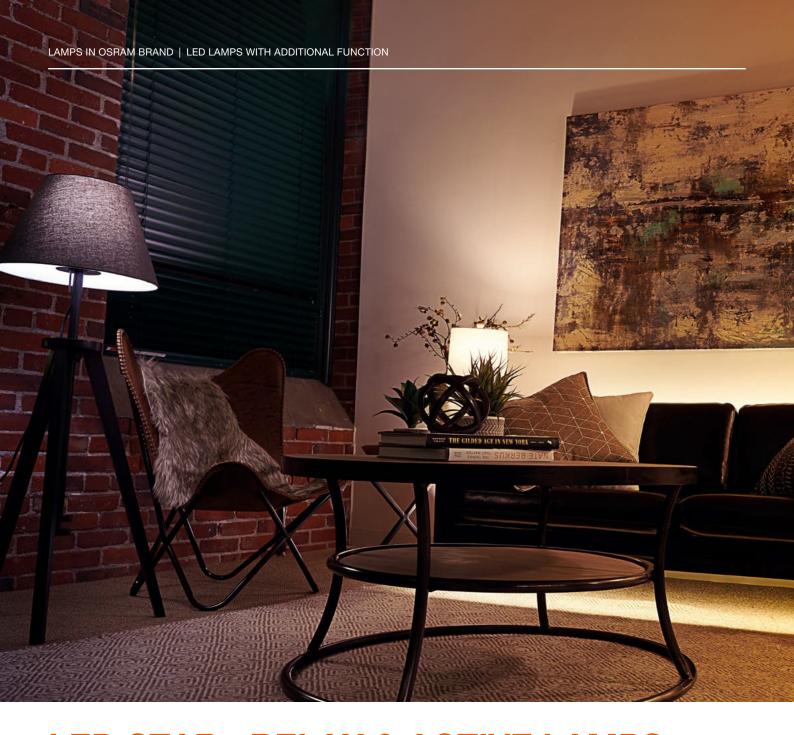

## LED STAR+ RELAX & ACTIVE LAMPS: TWO LIGHT COLORS, ONE LAMP



Cozy light for relaxing and enjoying life?
Or stimulating lighting when you need to roll up your sleeves and get productive?

LED STAR+ RELAX & ACTIVE now lets your customers easily adapt their LED light to their lives and switch between warm white (2 700 K) and cool white (4 000 K) as needed.













Product name	GTIN (EAN)	No.	w≙W	W	lm				t <sub>[h]</sub> <sup>s</sup>	[mm]	Ø d [mm]		
LED STAR+ RELAX & ACTIVE E27, 220-240V, Clear, Folding box													4 year guarantee
LED STAR+ Classic A FIL 60 Act&Rel	4058075 <b>434820</b>	1	60	7	806	Е	Warm White/Cool White	300	15000	105	60	1	4
E14, 220-240V, Clear, Folding box													4 year guarantee
LED STAR+ Classic B FIL 40 Act&Rel	4058075 <b>434783</b>	2	40	4	470	Е	Warm White/Cool White	300	15000	97	35	1	4
LED STAR+ Classic P FIL 40 Act&Rel	4058075 <b>434745</b>	3	40	4	470	Е	Warm White/Cool White	320	15000	78	45	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.



## LED STAR+ DAYLIGHT AND MOTION SENSOR: AUTOMATICALLY CONVENIENT



#### **LED STAR+ DAYLIGHT SENSOR**

LED lamp with integrated daylight sensor. For more convenience and security – without complicated sensor installation.



#### **LED STAR+ MOTION SENSOR**

LED lamp with integrated daylight and motion sensor. Comfortable, energy-saving – and also without the need to mount an extra sensor.










WAR

Product name	GTIN (EAN)	No.	w≙W	W	lm	Page 2		a s		t <sub>IH</sub>	[mm]	Ø d [mm]		品
		No.												
LED STAR+ DAYLIGHT SENSOR CLASSIC E27, 220-240V, Clear, Folding box														4 year guarantee
LED STAR+ Classic A FIL 40 Dayl+Sens	4058075 <b>435087</b>	1	40	4	470	Е	Cool White	-	300	15000	105	60	1	4
LED STAR+ Classic A FIL 60 Dayl+Sens	4058075 <b>435100</b>	1	60	6.5	806	Е	Cool White	-	300	15000	105	60	1	4
														4 year guarantee
E27, 220-240V, Frosted, Folding box														guarantee
LED STAR+ Classic A GL FR 40 Dayl+Sens	4058075 <b>428300</b>	2	40	6	470	G	Warm White	-	240	25 000	112	60	1	4
LED STAR+ Classic A GL FR 60 Dayl+Sens	4058075 <b>428324</b>	2	60	9	806	F	Warm White	-	240	25 000	112	60	1	4
LED STAR+ Classic A GL FR 75 Dayl+Sens	4058075 <b>428287</b>	2	75	10	1 055	F	Warm White	-	240	25 000	112	60	1	4
LED STAR+ Motion SENSOR CLASSIC E27, 220-240V, Frosted, Folding box														4 year guarantee
LED STAR+ Classic A FR 60 Mot+Sens	4058075 <b>428348</b>	3	60	9	806	F	Warm White	-	200	25 000	120	60	1	4
LED STAR+ Classic A FR 75 Mot+Sens	4058075 <b>428263</b>	3	75	11	1055	F	Warm White	-	200	25 000	120	60	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.

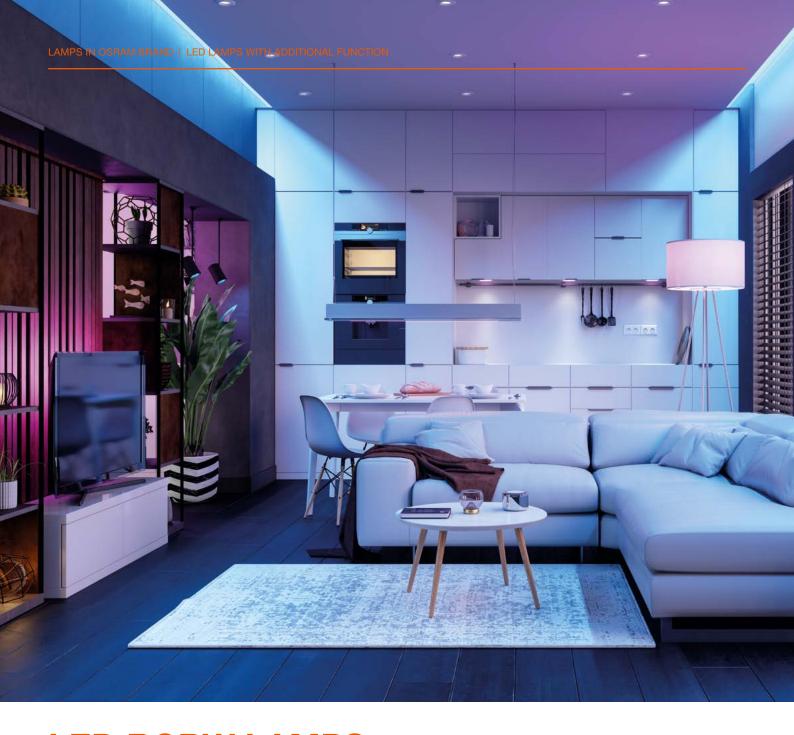

# LED RGBW LAMPS WITH REMOTE CONTROL: LIGHT AS IF BY MAGIC

One light source — an infinite number of lighting moods and possibilities.

Countless functions can be controlled at the press of a button using an intuitive remote control: switching on and off, dimming, selecting between warm or cool white tones and light in diverse colors. Color loops for dynamic color changes and other effects are also possible. Light for an individual lifestyle.



















Product name	GTIN (EAN)	No.	w≙W	W	(lm)	2		<b>3</b>		<b>t</b> hi '		Ø d [mm]		<b>a</b>
LED STAR+ RGBW REMOTE CONTROL E27, 220-240V, Frosted, Folding box														4 y
LED STAR+ Classic A FR 60	4058075 <b>430754</b>	1	60	9	806	G	Warm White	✓	200	25 000	112	60	1	4
LED STAR+ Classic A FR 60	4058075 <b>430891</b>	1	60	9.7	806	G	Warm White	✓	200	25 000	108	60	2	6
E14, 220-240V, Frosted, Folding box														4 guarant
LED STAR+ Classic B FR 25	4058075 <b>430778</b>	2	25	4.5	250	G	Warm White	✓	200	25 000	107	37	1	4
LED STAR+ Classic B FR 40	4058075 <b>610149</b>	3	40	4.9	470	F	Warm White	✓	200	25 000	107	37	2	6
LED STAR+ Classic B FR 40	4058075 <b>430853</b>	3	40	5.5	470	F	Warm White	✓	200	25 000	107	37	1	4
LED STAR+ Classic P FR 25	4058075 <b>430839</b>	4	25	4.5	250	G	Warm White	✓	200	25 000	91	47	1	4
LED STAR+ Classic P FR 40	4058075 <b>430877</b>	5	40	5.5	470	F	Warm White	√	200	25 000	91	47	1	4
GU10, 220-240V, Frosted, Folding box														4 guaran
LED STAR+ PAR 16 25	4058075 <b>445970</b>	6	25	4.5	250	G	Warm White	_/	120	25 000	56	50	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.



## VINTAGE EDITION 1906: BEST SELLER IN RETRO LOOK

VINTAGE EDITION 1906 lamps are among the top sellers on the LED lighting market thanks to their unique combination of stylish industrial design, aesthetic filament technology, beautiful light and very high energy efficiency.

Find all the information about the LEDVANCE brand VINTAGE EDITION 1906 LED luminaires at: www.ledvance.com/consumer/ products/product-stories/ vintage-edition-1906



VINTAGE EDITION 1906 PENDULUM

The perfect match for decorative retro LED lamps.



VINTAGE EDITION 1906 GLASS LUMINAIRES

The large selection of glass lamps can be mixed and matched.





















Product name	GTIN (EAN)	No.	w≙W	W	lm			O <sup>3</sup>	th	[mm]	Ø d [mm]		<b>3</b>
Vintage 1906° LED DIM GOLD E27, 220-240V, Clear, Folding box													3 year guarantee
Vintage 1906 LED Classic Globe125 FIL Gold 55 dim	4058075 <b>808997</b>	1	55	7	725	Е	Warm Comfort Light	✓	15000	173	125	1	4
Vintage 1906 LED Classic Edison FIL Gold 55 dim	4052899 <b>972360</b>	2	55	7	725	Е	Warm Comfort Light	✓	15000	145	64	1	4
Vintage 1906 LED Classic A160 FIL Gold 28 dim	4058075 <b>269705</b>	3	28	5	300	G	Warm Comfort Light	✓	15000	290	160	1	4
Vintage 1906 LED Classic Globe200 FIL Gold 28 dim	4058075 <b>269729</b>	4	28	5	300	G	Warm Comfort Light	✓	15000	283	200	1	4
Vintage 1906 LED Classic Edison FIL Gold 25 dim	4058075 <b>269965</b>	5	25	4.5	300	G	Warm Comfort Light	✓	15000	140	64	1	4
Vintage 1906 LED Classic Globe125 FIL Gold 25 dim	4058075 <b>270008</b>	6	25	4.5	300	G	Warm Comfort Light	✓	15000	178	125	1	4
Vintage 1906® LED DIM SMOKE E27, 220-240V, Clear, Folding box													3 year guarantee
Vintage 1906 LED Classic A160 FIL Smoke 12 dim	4058075 <b>270022</b>	7	12	5	150	G	Warm Comfort Light	✓	15000	290	160	1	4
Vintage 1906 LED Classic Globe200 FIL Smoke 12 dim	4058075 <b>270046</b>	8	12	5	150	G	Warm Comfort Light	✓	15000	283	200	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.







Product name	GTIN (EAN)	No.	w≙W	W	lm	2		t[h] <sup>3</sup>	1	Ø		晶
		No.		w	<b>W</b>				[mm]	[mm]		
Vintage 1906 <sup>®</sup> LED GOLD E27, 220-240V, Clear, Folding box												3 y
Vintage 1906 LED Classic A FIL Gold 22	4058075 <b>293199</b>	1	22	2.5	220	F	Warm Comfort Light	15 000	105	60	1	6
Vintage 1906 LED Classic A FIL Gold 35	4058075 <b>293090</b>	2	35	4	410	F	Warm Comfort Light	15 000	105	60	1	6
Vintage 1906 LED Classic A FIL Gold 50	4058075 <b>293298</b>	2	50	6.5	650	F	Warm Comfort Light	15 000	105	60	1	6
Vintage 1906 LED Classic A FIL Gold 63	4058075 <b>293359</b>	2	63	7.5	865	Е	Warm Comfort Light	15 000	105	60	1	6
Vintage 1906 LED Classic Edison FIL Gold 22	4058075 <b>808706</b>	3	22	2.5	220	F	Warm Comfort Light	15 000	143	64	1	4
Vintage 1906 LED Classic Edison FIL Gold 28	4058075 <b>092112</b>	4	25	5	300	G	Warm Comfort Light	15 000	140	64	1	4
Vintage 1906 LED Classic Edison FIL Gold 37	4052899 <b>962095</b>	5	37	4	410	F	Warm Comfort Light	15 000	145	64	1	4
Vintage 1906 LED Classic Globe125 FIL Gold 23	4058075 <b>808980</b>	6	22	2.5	220	F	Warm Comfort Light	15 000	168	124	1	4
Vintage 1906 LED Classic Globe125 FIL Gold 37	4052899 <b>962071</b>	7	35	4	410	F	Warm Comfort Light	15 000	168	124	1	4
Vintage 1906 LED Classic Globe125 FIL Gold 55	4058075 <b>809406</b>	7	54	6.5	720	G	Warm Comfort Light	15 000	168	124	1	4
Vintage 1906 LED Classic Tubular FIL Gold 20	4058075 <b>808171</b>	8	20	2.5	200	Е	Warm Comfort Light	15 000	138	32	1	4
Vintage 1906 LED Classic Tubular FIL Gold 35	4058075 <b>808188</b>	9	35	5	400	Е	Warm Comfort Light	15 000	185	32	1	4
Vintage 1906 LED Classic Oval FIL Gold 36	4058075 <b>091979</b>	10	36	4.5	470	E	Warm Comfort Light	15 000	156	75	1	4
E14, 220-240V, Clear, Folding box												3 ye guarant
Vintage 1906 LED Classic B FIL Gold 12	4058075 <b>293205</b>	11	12	1.5	120	G	Warm Comfort Light	15000	100	35	1	6
Vintage 1906 LED Classic B FIL Gold 22	4058075 <b>293212</b>	11	22	2.5	220	F	Warm Comfort Light	15000	100	35	1	6
Vintage 1906 LED Classic B FIL Gold 35	4058075 <b>293434</b>	12	35	4	410	F	Warm Comfort Light	15000	100	35	1	6
Vintage 1906 LED Classic BA FIL Gold 12	4058075 <b>293229</b>	13	12	1.5	120	G	Warm Comfort Light	15000	121	35	1	10
Vintage 1906 LED Classic BA FIL Gold 22	4058075 <b>293236</b>	13	22	2.5	220	F	Warm Comfort Light	15000	121	35	1	10
Vintage 1906 LED Classic BW FIL Gold 12	4058075 <b>293243</b>	14	12	1.5	120	G	Warm Comfort Light	15000	100	35	1	6
Vintage 1906 LED Classic BW FIL Gold 22	4058075 <b>293274</b>	14	22	2.5	220	F	Warm Comfort Light	15000	100	35	1	6
Vintage 1906 LED Classic P FIL Gold 22	4058075 <b>290815</b>	15	22	2.5	220	F	Warm Comfort Light	15 000	77	45	1	6
Vintage 1906 LED Classic P FIL Gold 35	4058075 <b>293496</b>	16	35	4	410	F	Warm Comfort Light	15 000	77	45	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.



















Product name	GTIN (EAN)	No.	w≙W	W	lm	P 2		t[h]	[mm]	Ø d [mm]		<b>a</b>
Vintage 1906® LED SPIRAL FILAMENT GOLD E27, 220-240V, Clear, Folding box												3 year guarantee
Vintage 1906 LED Classic Globe FIL Gold 15	4058075 <b>092136</b>	5	25	5	300	G	Warm Comfort Light	15000	178	125	1	4
Vintage 1906 LED Classic A160 FIL Gold 28	4058075 <b>091993</b>	2	28	5	300	G	Warm Comfort Light	15 000	290	160	1	4
Vintage 1906 LED Classic Globe200 FIL Gold 28	4058075 <b>092013</b>	3	28	5	300	G	Warm Comfort Light	15 000	283	200	1	4
Vintage 1906® LED SPIRAL FILAMENT SMOKE E27, 220-240V, Clear, Folding box												S year guarantee
Vintage 1906 LED Classic A160 FIL Smoke 12	4058075 <b>269903</b>	4	12	5	150	G	Warm Comfort Light	15 000	290	160	1	4
Vintage 1906 LED Classic Edison FIL Smoke 25	4058075 <b>269941</b>	1	15	5	150	G	Warm Comfort Light	15 000	140	64	1	4
Vintage 1906 LED Classic Globe125 FIL Smoke 15	4058075 <b>269989</b>	6	15	5	150	G	Warm Comfort Light	15 000	178	125	1	4
Vintage 1906 LED Classic Globe200 FIL Smoke 12	4058075 <b>269927</b>	7	12	5	150	G	Warm Comfort Light	15 000	283	200	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.









Product name	GTIN (EAN)	No.	w≙W	W	lm	Band F		<b>t</b> [h] <sup>3</sup>	[mm]	Ø d [mm]		
Vintage 1906° LED DEKOR E27, 220-240V, Clear, Folding box												3 year guarantee
Vintage 1906 LED Diamond FIL Gold 40	4058075 <b>091955</b>	1	40	4.5	470	Е	Warm Comfort Light	15000	140	110	1	4
Vintage 1906 LED Pinecone FIL Gold 40	4058075 <b>092037</b>	2	40	4.5	470	Е	Warm Comfort Light	15000	168	125	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.





# **DECORATIVE LED LAMPS:**FOR THE RIGHT MOOD – ALWAYS

Colored LED light for creating a pleasant ambiance on summer nights in the garden¹ or glare-reduced light with an attractive coating for locations such as a bathroom or cloakroom: The high-quality LED decorative lamps in classic design feature the latest LED filament technology.



<sup>&</sup>lt;sup>1</sup> For outdoor use only in appropriate light garland

















										•		
Product name	GTIN (EAN)	No.	w≙W	W	lm	2		t[h] <sup>3</sup>	[mm]	Ø d [mm]		<b>6</b>
LED STAR DECO CLASSIC A E27, 220-240V, Clear, Folding box												3 year guarantee
LED STAR Classic A Blue 15	4058075 <b>434004</b>	1	4	2.5	10	G	Blue	15 000	105	60	1	6
LED STAR Classic A Green 15	4058075 <b>433984</b>	2	7	2.5	45	G	Green	15000	105	60	1	6
LED STAR Classic A Orange 15	4058075 <b>433960</b>	3	17	2.5	160	G	Orange	15 000	105	60	1	6
LED STAR Classic A Red 15	4058075 <b>433946</b>	4	7	2.5	45	G	Red	15000	105	60	1	6
LED STAR Classic A Yellow 15	4058075 <b>433922</b>	5	23	2.5	235	F	Yellow	15000	105	60	1	6
Clear, five-pack folding box												3 year guarantee
LED STAR Classic A Color Box 15	4058075 <b>058460</b>	-	15	-	-	-	ВОХ	15 000	-	-	1	10

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.













Product name	GTIN (EAN)	No.	w≙W	W	lm	P 2		a s	t <sub>IH</sub>	[mm]	Ø d [mm]		<b>3</b>
LED SUPERSTAR CLASSIC A Mirror Silver E27, 220-240V, Clear, Folding box												4 you	or 3 year guarantee
LED SUPERSTAR Classic A FIL Mirror Silver 50 dim	4058075 <b>132917</b>	1	50	6.5	640	F	Warm White	✓	15000	105	60	1	6
LED STAR CLASSIC A Mirror Silver E27, 220-240V Clear, Folding box													
LED STAR Classic A FIL Mirror Silver 34	4058075 <b>435322</b>	1	35	4	400	F	Warm White	-	15 000	105	60	1	6
LED STAR Classic A FIL Mirror Silver 50	4058075 <b>427860</b>	1	50	6.5	650	F	Warm White	-	15 000	105	60	1	6
LED STAR CLASSIC P Mirror Silver E14, 220-240V, Clear, Folding box													3 year guarantee
LED STAR Classic P FIL Mirror Silver 31	4058075 <b>447134</b>	2	31	4	380	F	Warm White	-	15 000	84	45	1	6
LED STAR CLASSIC A Mirror Gold E27, 220-240V, Clear, Folding box													3 year guarantee
LED STAR Classic A FIL Mirror Gold 37	4058075 <b>435360</b>	3	37	4	420	F	Warm White	-	15 000	105	60	1	6
LED STAR Classic A FIL Mirror Gold 50	4058075 <b>435346</b>	3	50	7	650	F	Warm White	-	15 000	105	60	1	6
LED STAR CLASSIC P Mirror Gold E14, 220-240V, Clear, Folding box													3 year guarantee
LED STAR Classic P FIL Mirror Gold 34	4058075 <b>456549</b>	4	34	4	350	F	Warm White	-	15000	84	45	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.







### **SPECIAL LED LAMPS: INNOVATIVE SPECIALISTS**

Highly efficient, robust and durable. Special applications are where modern LED technology truly reveals its strengths. Having added new lamp types to our range we now offer you a comprehensive selection of innovative LED solutions for the most diverse lighting tasks - including perfect LED replacements for phased-out halogen lamps.

Our current highlights include LED pins G4 30 and GY6.35 30 with optimized dimensions, the new, slimmed down R7s LEDs, T SLIM lamps with new bases, decorative T26 lamps in a filament look, and the extremely small G4 MICRO.























Product name	GTIN (EAN)	No.	w≙W	W	lm	3 0000		<b>(</b> )		t <sub>[h]</sub> <sup>5</sup>		Ø d [mm]		<b>3</b>
LED PIN low voltage G4, 12V¹, Clear, Folding box														4 year guarantee
LED PIN 20 DIM 12V	4058075 <b>431904</b>	1	20	2	200	F	Warm White	✓	320	25 000	40	15	1	6
G4, 12V¹, Clear, Folding box														3 year guarantee
LED PIN MICRO 10 12V	4058075 <b>523098</b>	2	10	1	100	F	Warm White	-	300	15 000	30	10	1	6
LED PIN 10 12V	4058075 <b>431935</b>	3	10	0.9	100	F	Warm White	-	320	15 000	33	12	1	6
LED PIN 10 12V	4058075 <b>449770</b>	3	10	0.9	100	F	Warm White	-	320	15 000	33	12	2	12
LED PIN 20 12V	4058075 <b>431966</b>	4	20	1.8	200	F	Warm White	-	300	15 000	36	13	1	6
LED PIN 20 12V	4058075 <b>449800</b>	4	20	1.8	200	F	Warm White	-	300	15 000	36	13	2	12
LED PIN 30 12V	4058075 <b>431997</b>	5	28	2.6	300	F	Warm White	-	320	15 000	40	14	1	6
GY6.35, 12V <sup>1</sup> , Clear, Folding box														4 year guarantee
LED PIN 40 DIM 12V	4058075 <b>607255</b>	6	40	4.5	470	F	Warm White	✓	320	20 000	50	18	1	6
GY6.35, 12V <sup>1</sup> , Clear, Folding box														3 year guarantee
LED PIN 30 12V	4058075 <b>432123</b>	7	28	2.6	300	F	Warm White	-	320	15 000	40	14	1	6
LED PIN 40 12V	4058075 <b>607224</b>	6	40	4	470	F	Warm White	-	320	15 000	50	18	1	6

¹ Compatible with many commercially available electronic drivers. Details can be found under www.ledvance.com/consumer/services/downloads/ | ² You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | ³ Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | ⁴ LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | ⁵ Average lifespan in hrs.
























Product name	GTIN (EAN)	No.	w≙W	W	lm	Page 2		3		th '	[mm]	Ø d [mm]		<b>6</b>
LED SPECIAL PIN high voltage G9, 220-240V, Clear, Folding box														4 year
LED SPECIAL PIN 30 DIM	4058075 <b>607286</b>	1	30	3	320	F	Warm White	✓	300	25 000	52	16	1	6
LED SPECIAL PIN 40 DIM	4058075 <b>432246</b>	2	40	4	470	E,	Warm White	✓	320	25 000	59	18	1	6
LED PIN high voltage G9, 220-240V, Clear, Folding box														3 year guarantee
LED PIN 20 GLASS	4058075 <b>574434</b>	3	20	1.8	200	Е	Warm White	-	320	15 000	62	16	1	6
LED PIN 30 GLASS	4058075 <b>574465</b>	4	30	2.6	300	Е	Warm White	-	320	15 000	67	16	1	6
LED PIN 20	4058075 <b>449831</b>	5	20	1.9	200	F	Warm White	-	300	15 000	46	15	2	12
LED PIN 20	4058075 <b>432307</b>	5	20	1.9	200	F	Warm White	-	300	15 000	46	15	1	6
LED PIN 30	4058075 <b>449862</b>	6	30	2.6	320	Е	Warm White	-	300	15 000	47	15	2	12
LED PIN 30	4058075 <b>432338</b>	6	30	2.6	320	Е	Warm White	-	300	15 000	47	15	1	6
LED PIN 30	4058075 <b>432369</b>	6	30	2.6	320	Е	Cool White	-	300	15 000	47	15	1	6
LED PIN 40	4058075 <b>449893</b>	7	40	4.2	470	Е	Warm White	-	300	15 000	52	20	2	12
LED PIN 40	4058075 <b>432390</b>	7	40	4.2	470	Е	Warm White	-	300	15 000	52	20	1	6
LED PIN 40	4058075 <b>432420</b>	7	40	4.2	470	Е	Cool White	-	300	15 000	52	20	1	6
LED PIN 50	4058075 <b>432451</b>	8	50	4.8	600	Е	Warm White	-	320	15 000	59	18	1	6
LED PIN 50	4058075 <b>432482</b>	8	50	4.8	600	Е	Cool White	-	320	15 000	59	18	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.







Product name	GTIN (EAN)	No.	w≙W	W	lm	2		S s		th		Ø d [mm]		<b>a</b>
LED SLIM LINE R7s, 220-240V, Clear, Folding box														3 year guarantee
LED SLIM LINE 78 CL 60	4058075 <b>432710</b>	1	60	7	806	Е	Warm White	-	300	15000	78	20	1	6
LED SLIM LINE 118 CL 100	4058075 <b>432734</b>	2	100	12	1 521	Е	Warm White	-	300	15000	118	20	1	6
LED LINE R7s, 220-240V, Clear, Folding box														4 year guarantee
LED LINE 78 CL 75 DIM	4058075 <b>432512</b>	3	75	9.5	1 0 5 5	Е	Warm White	✓	300	25 000	78	29	1	6
LED LINE 78 CL 100 DIM	4058075 <b>432536</b>	4	100	12	1 521	Е	Warm White	✓	360	25 000	78	28	1	6
LED LINE 118 CL 125 DIM	4058075 <b>432550</b>	5	125	16	2000	Е	Warm White	✓	300	25 000	118	29	1	6
LED LINE 118 CL150 DIM	4058075 <b>432574</b>	6	150	19	2 452	Е	Warm White	✓	360	25 000	118	28	1	6
R7s, 220-240V, Clear, Folding box														3 year guarantee
LED LINE 78 CL 60	4058075 <b>432598</b>	7	60	6.5	806	Е	Warm White	-	330	15000	78	29	1	6
LED LINE 78 CL 75	4058075 <b>432611</b>	7	75	8.2	1 055	Е	Warm White	-	300	15000	78	29	1	6
LED LINE 78 CL 100	4058075 <b>432635</b>	8	100	12	1 521	Е	Warm White	-	360	15000	78	28	1	6
LED LINE 118 CL 100	4058075 <b>432659</b>	9	100	13	1 521	Е	Warm White	-	330	15000	118	29	1	6
LED LINE 118 CL 125	4058075 <b>432673</b>	5	125	16	2000	Е	Warm White	-	300	15000	118	29	1	6
LED LINE 118 CL 150	4058075 <b>432697</b>	6	150	19	2452	Е	Warm White	-	360	15000	118	28	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.







Product name	GTIN (EAN)	No.	w≙W	W	lm	2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		a s		t <sub>[h]</sub>	[mm]	Ø d [mm]		
LED SPECIAL SLIM 220-240V, Clear, Folding box														4 year guarantee
LED SPECIAL T SLIM DIM CL 60 E14	4058075 <b>607316</b>	1	60	7	806	Е	Warm White	✓	320	15000	92	20	1	6
LED SPECIAL T SLIM DIM CL 60 E27	4058075 <b>607347</b>	2	60	7.3	806	Е	Warm White	✓	320	15000	90	32	1	6
LED SPECIAL T SLIM DIM CL 60 GU10	4058075 <b>607378</b>	3	60	7	806	Е	Warm White	✓	320	15000	82	20	1	6
220-240V, Clear, Folding box														3 year guarantee
LED SPECIAL T SLIM DIM CL 75 B15d	4058075 <b>607194</b>	4	75	9	1055	Е	Warm White	✓	320	15000	100	18	1	4
LED SPECIAL T SLIM CL 60 B15d	4058075 <b>606968</b>	5	60	7	806	E	Warm White	-	320	15000	90	18	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.



















Product name	GTIN (EAN)	No.	w≙W	W	lm	2 Bhan			th s	[mm]	Ø d [mm]		<b>a</b>
LED SPECIAL T E14, 220-240V, Clear/Frosted, Folding box													3 year guarantee
LED SPECIAL T26 FIL 5	4058075 <b>432819</b>	1	5	1.6	50	G	Warm Comfort Light	300	15 000	63	26	1	6
LED SPECIAL T26 FIL 10	4058075 <b>432840</b>	1	12	2.2	110	G	Warm White	300	15 000	63	26	1	6
LED SPECIAL T26 FIL 10	4058075 <b>449923</b>	1	12	2.2	110	G	Warm White	300	15 000	63	26	2	12
LED SPECIAL T26 FIL 25	4058075 <b>449954</b>	2	25	2.8	250	F	Warm White	300	15 000	63	26	2	12
LED SPECIAL T26 FIL 25	4058075 <b>432871</b>	2	25	2.8	250	F	Warm White	300	15 000	63	26	1	6
LED SPECIAL T26 FIL 25	4058075 <b>432901</b>	2	25	2.8	250	F	Cool Daylight	300	15 000	63	26	1	6
LED SPECIAL T26 FIL 40	4058075 <b>432932</b>	3	40	4	470	Е	Warm White	300	15 000	80	25	1	6
LED SPECIAL T26 FIL 55	4058075 <b>432963</b>	3	55	6.5	730	Е	Warm White	300	15 000	80	25	1	6
LED SPECIAL T26 FR 20	4058075 <b>432758</b>	4	20	2.3	200	F	Warm White	160	15 000	63	25	1	6
LED SPECIAL T26 FR 20	4058075 <b>432789</b>	4	20	2.3	200	F	Cool Daylight	160	15 000	63	25	1	6
S19 s, 220-240V, Frosted, Folding box													3 year guarantee
LED STAR S19 FR 60	4052899 <b>955066</b>	5	60	9	830	F	Warm White	140	15000	310	38	1	10
GX53, 220-240V, Frosted, Folding box													3 year guarantee
LED STAR GX53 40 120°	4058075 <b>433441</b>	6	40	4.9	470	F	Warm White	120	15000	28	74	1	6
LED STAR GX53 40 120°	4058075 <b>433465</b>	6	40	4.9	470	F	Cool White	120	15000	28	74	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.









									,				
Product name	GTIN (EAN)	No.	w≙W	W	lm	2			t[h]	[mm]	Ø d [mm]		<b>6</b>
OSRAM DULUX® D LED EM G24d-1/G24d-2/G24d-3, 220-240V, Frosted, Folding box													3 year guarantee
DULUX D LED 13	4058075 <b>558106</b>	1	13	6	600	F	Warm White	120	30000	148	34	1	10
DULUX D LED 13	4058075 <b>558182</b>	1	13	6	660	Е	Cool White	120	30000	148	34	1	10
DULUX D LED 18	4058075 <b>558328</b>	2	18	7	700	Е	Warm White	120	30000	148	34	1	10
DULUX D LED 18	4058075 <b>558502</b>	2	18	7	770	Е	Cool White	120	30000	148	34	1	10
DULUX D LED 26	4058075 <b>558564</b>	3	26	10	990	F	Warm White	120	30000	171	34	1	10
DULUX D LED 26	4058075 <b>558601</b>	3	26	10	1100	Е	Cool White	120	30000	171	34	1	10
OSRAM DULUX® D/E LED HF G24q-1/G24q-2/G24q-3, 220-240V, Frosted, Folding box													3 year guarantee
DULUX D/E LED 13 HF	4058075 <b>558663</b>	2	13	6	600	F	Warm White	120	30000	143	33	1	10
DULUX D/E LED 13 HF	4058075 <b>559103</b>	2	13	6	660	Е	Cool White	120	30000	143	33	1	10
DULUX D/E LED 18 HF	4058075 <b>559127</b>	2	18	7	700	F	Warm White	120	30000	143	33	1	10
DULUX D/E LED 18 HF	4058075 <b>559158</b>	2	18	7	770	Е	Cool White	120	30000	143	33	1	10
DULUX D/E LED 26 HF	4058075 <b>559172</b>	3	26	10	990	F	Warm White	120	30000	170	33	1	10
DULUX D/E LED 26 HF	4058075 <b>559196</b>	3	26	10	1100	Е	Cool White	120	30000	170	33	1	10

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.









Product name	GTIN (EAN)	No.	w≙W	W	lm	Po P			t[h]	[mm]	Ø d [mm]		<b>3</b>
OSRAM DULUX® S LED EM													TEOMINGE
G23, 220-240V, Frosted, Folding box													3 year guarantee
DULUX S LED EM 9	4058075 <b>557994</b>	1	9	4.5	450	F	Warm White	140	30000	165	32	1	10
DULUX S LED EM 9	4058075 <b>558045</b>	1	9	4.5	500	Е	Cool White	140	30000	165	32	1	10
DULUX S LED EM 11	4058075 <b>558069</b>	2	11	6	630	F	Warm White	140	30000	234	32	1	10
DULUX S LED EM 11	4058075 <b>558083</b>	2	11	6	700	Е	Cool White	140	30000	234	32	1	10
OSRAM DULUX® F LED 2G10, 220-240V, Frosted, Folding box													3 year guarantee
DULUX F LED 26	4058075 <b>559295</b>	3	36	20	2250	Е	Warm White	120	30000	222	89	1	10
DULUX F LED 26	4058075 <b>559318</b>	3	36	20	2500	Е	Cool White	120	30000	222	89	1	10
OSRAM DULUX® L LED HF 2G11, 220-240V, Frosted, Folding box													3 year guarantee
DULUX L LED HF 18	4058075 <b>557390</b>	4	18	8	900	Е	Warm White	140	30 000	230	44	1	10
DULUX L LED HF 18	4058075 <b>557499</b>	4	18	8	1 000	Е	Cool White	140	30000	230	44	1	10
DULUX L LED HF 24	4058075 <b>559219</b>	5	24	12	1350	Е	Warm White	140	30 000	321	44	1	10
DULUX L LED HF 24	4058075 <b>559233</b>	5	24	12	1 500	Е	Cool White	140	30 000	321	44	1	10

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.


















Product name	GTIN (EAN)	No.	w≙W	W	lm	2 Bhand			t <sub>M</sub> ³		Ø d [mm]		<b>a</b>
OSRAM SubstiTUBE® T9 G10q, 220-240V, Frosted, Folding box													3 year guarantee
SubstiTUBE T9 LED 22 840	4058075 <b>604612</b>	1	22	12	1320	Е	Cool White	120	30000	212	212	1	10
SubstiTUBE T9 LED 22 865	4058075 <b>604650</b>	1	22	12	1 320	Е	Cool Daylight	120	30000	212	212	1	10
SubstiTUBE T9 LED 32 840	4058075 <b>604674</b>	2	32	20	2200	Е	Cool White	120	30000	300	300	1	10
SubstiTUBE T9 LED 32 865	4058075 <b>604698</b>	2	32	20	2200	Е	Cool Daylight	120	30000	300	300	1	10
OSRAM Circolux LED E27, 220-240V, Frosted, Folding box													4 year guarantee
LED CIRCOLUX FR 100 non-dim	4058075 <b>606999</b>	3	100	14.5	1 521	F	Warm White	160	15000	86	260	1	4

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.



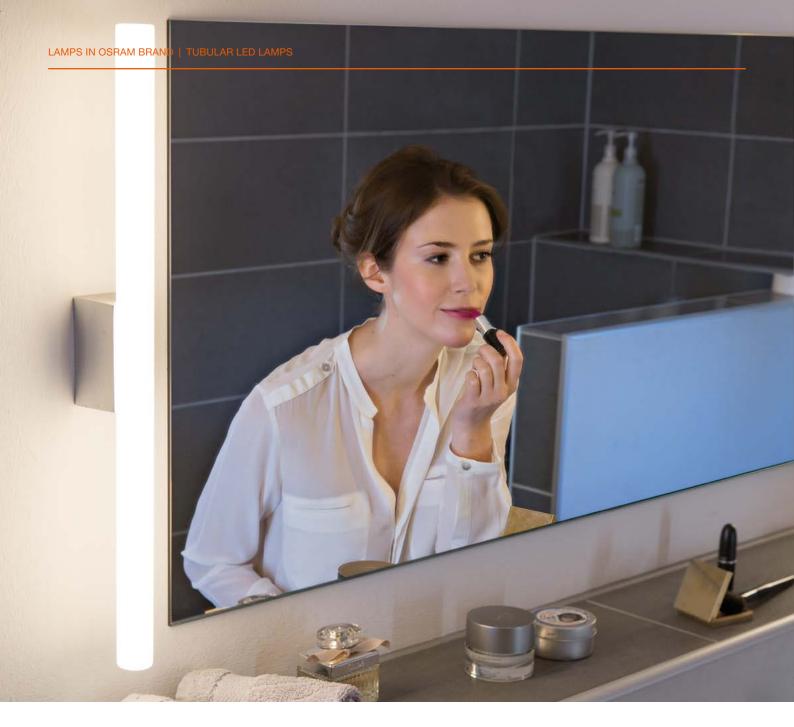

# OSRAM LEDINESTRA: BRILLIANCE RIGHT DOWN THE LINE

Brilliance made in Germany: In the area of tube-shaped lamps, we also offer you high-quality, attractive full-glass solutions that address the needs of your customers – manufactured at a German production site. In addition to two base shapes and three lengths, dimmable versions are also available.










Product name	GTIN (EAN)	No.	w≙W	W	lm	2		S <sup>3</sup>		t <sub>h</sub>		Ø d [mm]		<b>a</b>
		No.										[mm]		
OSRAM LEDinestra® S14s, 220-240V, Frosted, Folding box														4 year guarantee
LEDinestra DIM 30CM	4058075 <b>607033</b>	1	27	3.1	275	F	Warm White	✓	200	25 000	300	29	1	10
LEDinestra DIM 50CM	4058075 <b>607071</b>	2	40	4.9	470	F	Warm White	✓	200	25 000	500	29	1	10
LEDinestra DIM 100CM	4058075 <b>607095</b>	3	75	9.9	1055	F	Warm White	✓	200	25 000	1000	29	1	5
S14d, 220-240V, Frosted, Folding box														4 year guarantee
LEDinestra DIM 30CM	4058075 <b>607019</b>	4	27	3.1	275	F	Warm White	✓	200	25 000	300	29	1	10
LEDinestra DIM 50CM	4058075 <b>607057</b>	5	40	4.9	470	F	Warm White	✓	200	25 000	500	29	1	10
S14s, 220-240V, Frosted, Folding box														3 year guarantee
LEDinestra 30CM	4058075 <b>607132</b>	1	27	3.2	275	F	Warm White	-	200	15000	300	29	1	10
LEDinestra 50CM	4058075 <b>607170</b>	2	40	4.8	470	F	Warm White	-	200	15 000	500	29	1	10
S14d, 220-240V, Frosted, Folding box														3 year guarantee
LEDinestra 30CM	4058075 <b>607118</b>	4	27	3.2	275	F	Warm White	-	200	15000	300	29	1	10
LEDinestra 50CM	4058075 <b>607156</b>	5	40	4.8	470	F	Warm White	-	200	15 000	500	29	1	10

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.

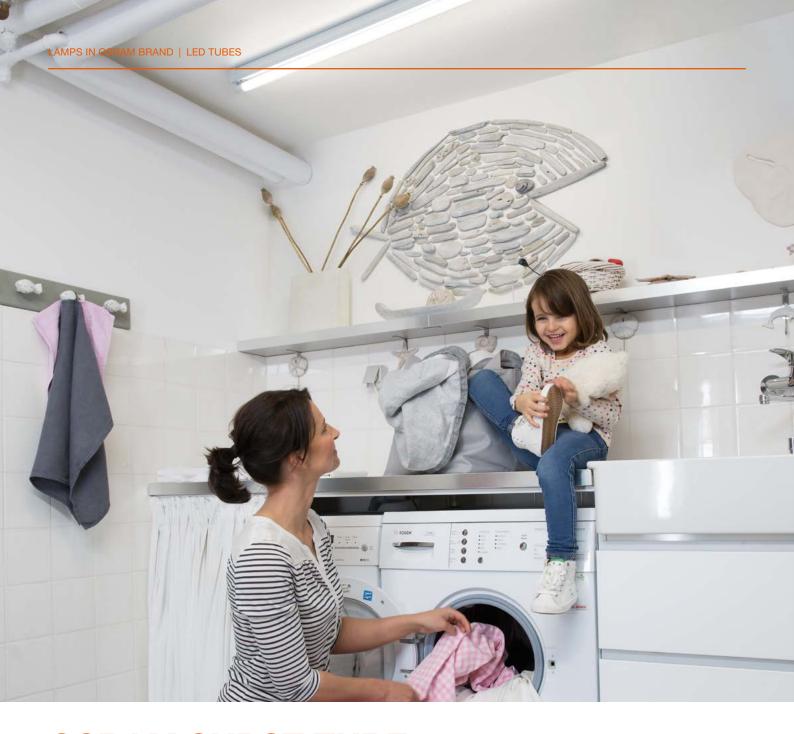

## **OSRAM SUBSTITUBE:**CLEARLY SUPERIOR GLASS

They are the perfect, energy-efficient retrofit replacement for conventional fluorescent tubes.

The product range is continuously being expanded. With their full-glass design, the OSRAM SubstiTUBE LED STAR tubes are a compelling choice with a particularly valuable and attractive look. The LED tube SubstiTUBE Motion Sensor EM convince with integrated motion detector and two-step dimming function.









Product name	GTIN (EAN)	No.	w≙W	W	lm	<sup>2</sup>			<b>t</b> <sub>[h]</sub>	[mm]	Ø d [mm]		<b>6</b>
OSRAM SubstiTUBE® STAR EM PC G13, 220-240V, Frosted, Sleeve													3 year guarantee
ST8SP-0.6m-7.6W-830-EM	4058075 <b>593800</b>	1	18	6.6	720	F	Warm White	190	30000	603	26.7	1	8
ST8SP-0.6m-7.6W-840-EM	4058075 <b>593824</b>	1	18	6.6	800	Е	Cool White	190	30000	603	26.7	1	8
ST8SP-0.6m-7.6W-865-EM	4058075 <b>593848</b>	1	18	6.6	800	Е	Cool Daylight	190	30000	603	26.7	1	8
ST8SP-1.2m-16.2W-830-EM	4058075 <b>593862</b>	1	36	15	1620	F	Warm White	190	30000	1 212	26.7	1	8
ST8SP-1.2m-16.2W-840-EM	4058075 <b>593886</b>	1	36	15	1800	Е	Cool White	190	30000	1 212	26.7	1	8
ST8SP-1.2m-16.2W-865-EM	4058075 <b>593909</b>	1	36	15	1800	Е	Cool Daylight	190	30000	1 212	26.7	1	8
ST8SP-1.5m-19.1W-830-EM	4058075 <b>593923</b>	1	58	18.3	1980	F	Warm White	190	30000	1 513	26.7	1	8
ST8SP-1.5m-19.1W-840-EM	4058075 <b>593947</b>	1	58	18.3	2200	Е	Cool White	190	30000	1 513	26.7	1	8
ST8SP-1.5m-19.1W-865-EM	4058075 <b>593961</b>	1	58	18.3	2200	Е	Cool Daylight	190	30000	1 513	26.7	1	8
OSRAM Substitube® STAR EM G13, 220-240V, Frosted, Sleeve													3 year guarantee
ST8S-0.6m-7.6W-830-EM	4058075 <b>593985</b>	1	18	6.6	720	F	Warm White	190	30000	603	26.7	1	8
ST8S-0.6m-7.6W-840-EM	4058075 <b>594005</b>	1	18	6.6	800	Е	Cool White	190	30000	603	26.7	1	8
ST8S-0.6m-7.6W-865-EM	4058075 <b>594029</b>	1	18	6.6	800	Е	Cool Daylight	190	30000	603	26.7	1	8
ST8S-1.2m-16.2W-830-EM	4058075 <b>594043</b>	1	36	15	1620	F	Warm White	190	30000	1 212	26.7	1	8
ST8S-1.2m-16.2W-840-EM	4058075 <b>594067</b>	1	36	15	1800	Е	Cool White	190	30000	1 212	26.7	1	8
ST8S-1.2m-16.2W-865-EM	4058075 <b>594081</b>	1	36	15	1800	Е	Cool Daylight	190	30000	1 212	26.7	1	8
ST8S-1.5m-19.1W-830-EM	4058075 <b>594104</b>	1	58	18.3	1980	F	Warm White	190	30000	1 513	26.7	1	8
ST8S-1.5m-19.1W-840-EM	4058075 <b>594128</b>	1	58	18.3	2200	Е	Cool White	190	30000	1 513	26.7	1	8
ST8S-1.5m-19.1W-865-EM	4058075 <b>594142</b>	1	58	18.3	2200	Е	Cool Daylight	190	30000	1 513	26.7	1	8

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.






Product name	GTIN (EAN)	No.	w≙W	W	lm	2			<b>t</b> M <sup>3</sup>	[mm]	Ød		
OSRAM SubstiTUBE® Motion Sensor G13, 220-240V, Frosted, Sleeve													5 year guarantee
ST8MS-0.6m-7.3W-840-EM	4058075 <b>594302</b>	1	18	6.8	1100	С	Cool White	190	50000	604	26.7	1	8
ST8MS-1.2m-14W-840-EM	4058075 <b>594326</b>	1	36	13.1	2100	С	Cool White	190	50000	1 212	26.7	1	8
ST8MS-1.5m-20.6W-840-EM	4058075 <b>594340</b>	1	58	19.3	3100	С	Cool White	190	50000	1 513	26.7	1	8

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> Average lifespan in hrs.



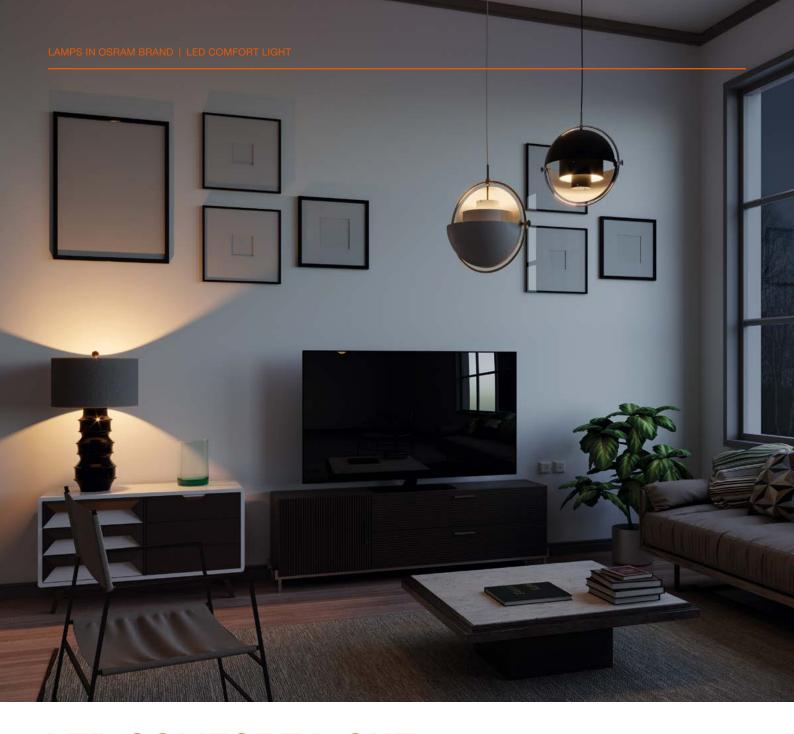

## **LED COMFORT LIGHT:**BETTER LIGHT – NATURALLY

LED COMFORT LIGHT is the latest milestone in the development of market-driven LED light. The latest generation of LED SUPERSTAR PLUS lamps not only combines classic all-glass design with all the benefits of modern LED lamp technology, it offers impressive quality of light that almost matches that of natural sunlight.

#### Major benefits at a glance:

- Natural light spectrum with outstanding color rendering of CRI > 90
- Greatly reduced blue component very close to natural sunlight
- Improved visual comfort and reduced eye strain
- Flickering and stroboscopic effects reduced to a minimum
- All lamps dimmable<sup>1</sup>

... and there's even more good news: the new range kicks off with no fewer than 58 lamp types. Each comes with a four-year guarantee<sup>2</sup>. And of course, all the lamps and their packaging comply with EU regulations SLR and ELR.

LED lamps can be operated with a wide variety of commercially available dimmers; for details and results from compatibility tests, please refer to www.ledvance.com/professional/services/led-lamps-compatibility/dimming-conformity and the additional technical product information sheets linked there

<sup>\*</sup> For the exact guarantee terms and conditions that apply to consumers, please refer to www.ledvance.com/consumer/services/guarantee















Product name	GTIN (EAN)	No.	w≙W	W	lm	2 De De D			t <sub>lb1</sub> '	[mm]	Ø d [mm]		
LED SUPERSTAR+ CLASSIC A FILAMENT GLASS E27, 220-240V, Clear, Folding box													4 year guarantee
LED SUPERSTAR+ Classic A FIL 60 927	4058075 <b>602458</b>	1	60	7	806	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A FIL 60 940	4058075 <b>602472</b>	1	60	7	806	D	Cool White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A FIL 75 927	4058075 <b>602496</b>	1	75	9	1055	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A FIL 75 940	4058075 <b>602519</b>	1	75	9	1055	D	Cool White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A FIL 100 927	4058075 <b>602533</b>	2	100	12	1 521	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A FIL 100 940	4058075 <b>602557</b>	2	100	12	1 521	D	Cool White	✓	15000	105	60	1	6
E27, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR+ Classic A GL FR 60 927	4058075 <b>602571</b>	3	60	7	806	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A GL FR 60 940	4058075 <b>602595</b>	3	60	7	806	D	Cool White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A GL FR 75 927	4058075 <b>602618</b>	3	75	9	1 055	D	Warm White	√	15000	105	60	1	6
LED SUPERSTAR+ Classic A GL FR 75 940	4058075 <b>602632</b>	3	75	9	1 055	D	Cool White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A GL FR 100 927	4058075 <b>602656</b>	3	100	12	1 521	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A GL FR 100 940	4058075 <b>602670</b>	3	100	12	1 521	D	Cool White	✓	15000	105	60	1	6
B22d, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR+ Classic A GL FR 100 927	4058075 <b>602694</b>	4	100	12	1 521	D	Warm White	✓	15000	105	60	1	6
LED SUPERSTAR+ Classic A GL FR 100 940	4058075 <b>602717</b>	4	100	12	1 521	D	Cool White	✓	15000	105	60	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.



















Product name	GTIN (EAN)	No.	w≙W	W	lm	Page 2			t <sub>M</sub> '	[mm]	Ø d [mm]		<b>3</b>
LED SUPERSTAR+ CLASSIC B FILAMENT GLASS E14, 220-240V, Clear, Folding box													4 year guarantee
LED SUPERSTAR+ Classic B FIL 40 927	4058075 <b>602731</b>	1	40	5	470	D	Warm White	<b>√</b>	15000	97	35	1	6
LED SUPERSTAR+ Classic B FIL 40 940	4058075 <b>602755</b>	1	40	5	470	D	Cool White	✓	15000	97	35	1	6
E14, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR+ Classic B GL FR 40 927	4058075 <b>602779</b>	3	40	5	470	D	Warm White	<b>√</b>	15000	97	35	1	6
LED SUPERSTAR+ Classic B GL FR 40 940	4058075 <b>602793</b>	3	40	5	470	D	Cool White	✓	15000	97	35	1	6
B22d, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR+ Classic B GL FR 40 927	4058075 <b>602816</b>	4	40	5	470	D	Warm White	√	15 000	97	35	1	6
E14, 220-240V, Clear, Folding box													4 year guarantee
LED SUPERSTAR+ Classic BA FIL 40 927	4058075 <b>602830</b>	5	40	5	470	D	Warm White	✓	15 000	121	35	1	6
E14, 220-240V, Clear, Folding box													© LEWISCE 4 year guarantee
LED SUPERSTAR+ Classic BW FIL 40 940	4058075 <b>602854</b>	6	40	5	470	D	Cool White	✓	15000	121	35	1	6
E14, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR+ Classic BW GL FR 40 927	4058075 <b>602878</b>	2	40	5	470	D	Warm White	✓	15000	121	35	1	6
LED SUPERSTAR+ Classic BW GL FR 40 940	4058075 <b>602892</b>	2	40	5	470	D	Cool White	✓	15000	121	35	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.













Product name	GTIN (EAN)	No.	w≙W	W	lm	Page 2			th)		Ø d [mm]		<b>a</b>
LED SUPERSTAR+ CLASSIC P FILAMENT GLASS E14/E27, 220-240V, Clear, Folding box													4 year guarantee
LED SUPERSTAR+ Classic P FIL 40 927	4058075 <b>603158</b>	3	40	5	470	D	Warm White	✓	15000	78	45	1	6
LED SUPERSTAR+ Classic P FIL 40 940	4058075 <b>603172</b>	3	40	5	470	D	Cool White	✓	15000	78	45	1	6
LED SUPERSTAR+ Classic P FIL 40 927	4058075 <b>603073</b>	3	40	5	470	D	Warm White	✓	15000	78	45	1	6
LED SUPERSTAR+ Classic P FIL 40 940	4058075 <b>603097</b>	3	40	5	470	D	Cool White	✓	15 000	78	45	1	6
E14/E27, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR+ Classic P GL FR 40 927	4058075 <b>603196</b>	1	40	5	470	D	Warm White	$\checkmark$	15000	78	45	1	6
LED SUPERSTAR+ Classic P GL FR 40 940	4058075 <b>603219</b>	1	40	5	470	D	Cool White	✓	15000	78	45	1	6
LED SUPERSTAR+ Classic P GL FR 40 927	4058075 <b>603110</b>	2	40	5	470	D	Warm White	✓	15000	78	45	1	6
LED SUPERSTAR+ Classic P GL FR 40 940	4058075 <b>603134</b>	2	40	5	470	D	Cool White	✓	15 0 0 0	78	45	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.







COOL





Product name	GTIN (EAN)	No.	w≙W	W	lm	2		S S	t <sub>Ibl</sub>	[mm]	Ø d [mm]		
													LIONNER
LED SUPERSTAR+ CLASSIC GLOBE FILAMENT GLASS E27, 220-240V, Clear, Folding box													4 year guarantee
LED SUPERSTAR+ Classic GLOBE 95 FIL 100 927	4058075 <b>602953</b>	1	100	12	1 521	D	Warm White	✓	15000	135	95	1	6
LED SUPERSTAR+ Classic GLOBE 95 FIL 100 940	4058075 <b>602977</b>	1	100	12	1 521	D	Cool White	✓	15000	135	95	1	6
													LIEWINGE
E27, 220-240V, Clear, Folding box													4 year guarantee
LED SUPERSTAR+ Classic GLOBE 125 FIL 100 927	4058075 <b>602915</b>	2	100	12	1 521	D	Warm White	✓	15000	168	124	1	4
LED SUPERSTAR+ Classic GLOBE 125 FIL 100 940	4058075 <b>602939</b>	2	100	12	1 521	D	Cool White	✓	15000	168	124	1	4
													4 year guarantee
E27, 220-240V, Frosted, Folding box													guarantee
LED SUPERSTAR+ Classic GLOBE 95 GL FR 100 927	4058075 <b>602991</b>	3	100	12	1 521	D	Warm White	✓	15000	135	95	1	6
LED SUPERSTAR+ Classic GLOBE 95 GL FR 100 940	4058075 <b>603011</b>	3	100	12	1 521	D	Cool White	✓	15000	135	95	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.









Product name	GTIN (EAN)	No.	w≙W	W	lm	2			<b>t</b> M'	[mm]	Ø d [mm]		
LED SUPERSTAR+ CLASSIC EDISON FILAMENT GLASS E27, 220-240V, Clear, Folding box													3 year guarantee
LED SUPERSTAR+ Classic Edison FIL 60 927	4058075 <b>603035</b>	1	60	6.5	730	D	Warm White	✓	15000	143	64	1	6
LED SUPERSTAR+ Classic Edison FIL 60 940	4058075 <b>603059</b>	1	60	6.5	730	D	Cool White	✓	15000	143	64	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.





















Product name	GTIN (EAN)	No.	w≙W	W	lm	2 BBB <sup>2</sup>			t <sub>[h]</sub>	[mm]	Ø d [mm]		<b>a</b>
LED SUPERSTAR+ CLASSIC STICK FROSTED FILAMENT E27, 220-240V, Frosted, Folding box													4 year guarantee
LED SUPERSTAR+ Classic STICK FR 75 927	4058075 <b>611542</b>	1	75	11	1000	F	Warm White	✓	15000	121	44	1	6
LED SUPERSTAR+ Classic STICK FR 75 940	4058075 <b>611566</b>	1	75	11	1050	F	Cool White	$\checkmark$	15000	121	44	1	6
LED SUPERSTAR+ Classic STICK FR 75 965	4058075 <b>611580</b>	1	75	11	1050	F	Cool Daylight	✓	15000	121	44	1	6
LED SUPERSTAR+ R50/R63/R80 E14/E27, 220-240V, Folding box													3 year guarantee
LED SUPERSTAR R50 60 dim 36° 927	4058075 <b>620346</b>	4	60	4.8	345	G	Warm White	✓	25 000	85	50	1	6
LED SUPERSTAR R50 60 dim 36° 940	4058075 <b>620360</b>	4	60	4.8	345	G	Cool White	✓	25 000	85	50	1	6
LED SUPERSTAR R63 60 dim 36° 927	4058075 <b>620308</b>	5	60	4.8	345	G	Warm White	✓	25 000	102	50	1	6
LED SUPERSTAR R80 60 dim 36° 940	4058075 <b>620322</b>	6	60	4.8	345	G	Warm White	✓	25 000	113	50	1	6
LED SUPERSTAR+ PAR16 GU10, 220-240V, Folding box													3 year guarantee
LED SUPERSTAR+ spot PAR16 GL 32 927	4058075 <b>613126</b>	2	50	4.1	350	F	Warm White	✓	25 000	55	50	1	6
LED SUPERSTAR+ spot PAR16 GL 32 940	4058075 <b>613140</b>	2	50	4.1	350	F	Cool White	$\checkmark$	25 000	55	50	1	6
LED SUPERSTAR+ spot PAR16 GL 35 927	4058075 <b>613041</b>	3	35	3.7	230	G	Warm White	$\checkmark$	25 000	54	50	1	6
LED SUPERSTAR+ spot PAR16 GL 35 940	4058075 <b>613065</b>	3	35	3.7	230	G	Cool White	✓	25 000	54	50	1	6
LED SUPERSTAR+ spot PAR16 GL 46 927	4058075 <b>613164</b>	2	80	6.7	575	F	Warm White	✓	25 000	55	50	1	6
LED SUPERSTAR+ spot PAR16 GL 46 940	4058075 <b>613188</b>	2	80	6.7	575	F	Cool White	✓	25 000	55	50	1	6
LED SUPERSTAR+ spot PAR16 GL 50 927	4058075 <b>613089</b>	3	50	4.7	350	F	Warm White	✓	25 000	54	50	1	6
LED SUPERSTAR+ spot PAR16 GL 50 940	4058075 <b>613102</b>	3	50	4.7	350	F	Cool White	✓	25 000	54	50	1	6

<sup>&</sup>lt;sup>1</sup> You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | <sup>3</sup> LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | <sup>4</sup> Average lifespan in hrs.









Product name	GTIN (EAN)	No.	w≙W	W	lm	B 3			<b>t</b> Ms	[mm]	Ø d [mm]		
LED SUPERSTAR+ MR16 GU5.3, 12V <sup>1</sup> , Folding box													3 year guarantee
LED SUPERSTAR+ spot MR16 GL 35 927	4058075 <b>613201</b>	1	35	5	350	G	Warm White	✓	25 000	44	50	1	6
LED SUPERSTAR+ spot MR16 GL 35 940	4058075 <b>613225</b>	1	35	5	350	G	Cool White	✓	25 000	44	50	1	6
LED SUPERSTAR+ spot MR16 GL 50 927	4058075 <b>613249</b>	1	50	8	561	G	Warm White	✓	25 000	44	50	1	6
LED SUPERSTAR+ spot MR16 GL 50 940	4058075 <b>613263</b>	1	50	8	561	G	Cool White	✓	25 000	44	50	1	6

¹ Compatible with many commercially available electronic drivers. Details can be found under www.ledvance.com/consumer/services/downloads/ | ² You will find further information and the exact guarantee terms and conditions at www.ledvance.com/guarantee | ³ Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency) | ⁴ LED lamps can be operated on a variety of commercially available dimmers; Details and results of compatability tests can be found on www.ledvance.com/consumer/services/downloads/ under the linked product technical information sheets | ⁵ Average lifespan in hrs.



## **HALOGEN LAMPS**




HALOGEN HIGH-VOLTAGE PIN OR PLUG BASE LAMPS

103



HALOGEN LOW-VOLTAGE PIN OR PLUG BASE LAMPS

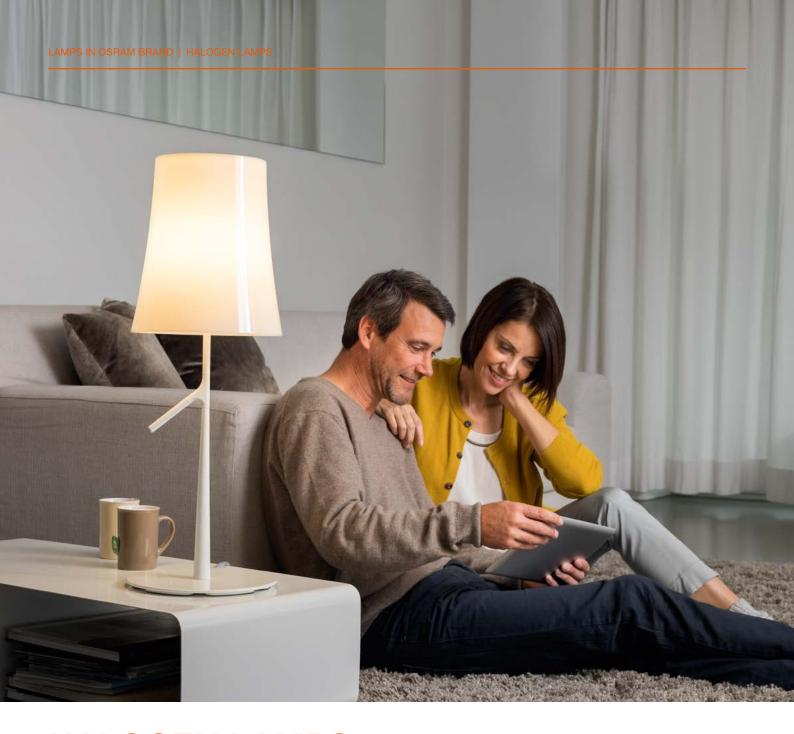

## **HALOGEN LAMPS:**EU-COMPLIANT QUALITY OF LIGHT

As a consequence of the EU regulation on eco-design (SLR), many halogen lamps will be phased out from September 1, 2021. For each of these halogen lamps we already offer you high-quality, energy-efficient LED replacements.

The lamps in the HALOLINE (<2700 lumens), HALOPIN and HALOSTAR series will be available as before. This means that you can continue to meet special customer requirements with proven top-quality products.





Product name	GTIN (EAN)	No.	w≙W	W	lm	l line la		[mm]	Ø d [mm]		
		NO.									
OSRAM HALOLINE® STAR R7s, 230V, Clear, Folding box/Blister											
HALOLINE STAR 48 W	4008321 <b>977595</b>	1	60	48	750	G	✓	74.9	12	1	20
HALOLINE STAR 48 W	4008321 <b>977571</b>	1	60	48	750	G	✓	74.9	12	1	10
HALOLINE STAR 80 W	4008321 <b>928078</b>	1	100	80	1 400	G	✓	74.9	12	1	15
HALOLINE STAR 80 W	4008321 <b>928955</b>	1	100	80	1 400	G	✓	74.9	12	1	10
HALOLINE STAR 120 W	4008321 <b>928092</b>	2	150	120	2 2 5 0	G	✓	74.9	12	1	20
HALOLINE STAR 120 W	4008321 <b>928931</b>	3	150	120	2 250	G	✓	74.9	12	1	10
R7s, 230V, Clear, Folding box/Blister											
HALOLINE STAR 120 W	4008321 <b>977670</b>	2	150	120	2 2 2 2 0	G	✓	114.2	12	1	15
HALOLINE STAR 120 W	4008321 <b>977656</b>	2	150	120	2220	G	✓	114.2	12	1	10
R7s, 240V, Clear, Folding box/Blister											
HALOLINE STAR 48 W	4008321 <b>977632</b>	1	60	48	750	G	✓	74.9	12	1	20
HALOLINE STAR 48 W	4008321 <b>977618</b>	1	60	48	750	G	✓	74.9	12	1	10
HALOLINE STAR 120 W	4008321 <b>977717</b>	2	150	120	2 2 2 2 0	G	✓	114.2	12	1	20
HALOLINE STAR 120 W	4008321 <b>977694</b>	2	150	120	2220	G	✓	114.2	12	1	20

 $<sup>^{\</sup>rm 1}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)



WARM WHITE

Product name	GTIN (EAN)	No.	w≙W	W	lm	1 DO DO DO		[mm]	Ø d [mm]		
OSRAM HALOPIN® SUPERSTAR G9, 230V/240V, Clear, Folding box/Blister											
HALOPIN SUPERSTAR 20 W	4008321 <b>945273</b>	1	25	20	235	G	✓	43	14	1	16
HALOPIN SUPERSTAR 20 W	4008321 <b>945136</b>	1	25	20	235	G	✓	43	14	1	10
HALOPIN SUPERSTAR 20 W	4008321 <b>945556</b>	1	25	20	235	G	✓	43	14	1	20
HALOPIN SUPERSTAR 20 W	4008321 <b>945419</b>	1	25	20	235	G	✓	43	14	1	10
HALOPIN SUPERSTAR 20 W	4052899 <b>195356</b>	1	25	20	235	G	✓	43	14	2	20
HALOPIN SUPERSTAR 20 W	4052899 <b>948488</b>	1	25	20	235	G	✓	43	14	3	30
HALOPIN SUPERSTAR 33 W	4008321 <b>208668</b>	1	40	33	460	G	✓	43	14	1	16
HALOPIN SUPERSTAR 33 W	4008321 <b>204547</b>	1	40	33	460	G	✓	43	14	1	10
HALOPIN SUPERSTAR 33 W	4008321 <b>226341</b>	1	40	33	460	G	√	43	14	1	20
HALOPIN SUPERSTAR 33 W	4008321 <b>226327</b>	1	40	33	460	G	✓	43	14	1	10
HALOPIN SUPERSTAR 33 W	4052899 <b>195370</b>	1	40	33	460	G	✓	43	14	2	20
HALOPIN SUPERSTAR 33 W	4052899 <b>948501</b>	1	40	33	460	G	✓	43	14	3	30
HALOPIN SUPERSTAR 48 W	4008321 <b>945334</b>	1	60	48	740	G	✓	43	14	1	16
HALOPIN SUPERSTAR 48 W	4008321 <b>945198</b>	1	60	48	740	G	✓	43	14	1	10
HALOPIN SUPERSTAR 48 W	4052899 <b>195394</b>	1	60	48	740	G	<b>√</b>	43	14	2	20

 $<sup>^{\</sup>rm 1}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)











Product name	GTIN (EAN)	No.	w≙W	W	lm	<sup>2</sup>		[mm]	Ø d [mm]		
OSRAM HALOSTAR® SUPERSTAR G4, 12V <sup>1</sup> , Clear, Blister											
HALOSTAR SUPERSTAR 7 W	4008321 <b>990167</b>	1	10	7	95	G	✓	33	10	1	10
HALOSTAR SUPERSTAR 7 W	4052899 <b>195257</b>	1	10	7	95	G	✓	33	10	2	20
HALOSTAR SUPERSTAR 14 W	4008321 <b>990181</b>	1	25	14	230	G	✓	33	10	1	10
HALOSTAR SUPERSTAR 14 W	4052899 <b>195271</b>	1	25	14	230	G	✓	33	10	2	20
GY6.35, 12V <sup>1</sup> , Blister											
HALOSTAR SUPERSTAR 25 W	4008321 <b>990204</b>	2	35	25	500	G	✓	44	12	1	10
HALOSTAR SUPERSTAR 25 W	4052899 <b>195295</b>	2	35	25	500	G	✓	44	12	2	20
HALOSTAR SUPERSTAR 35 W	4008321 <b>990228</b>	1	50	35	765	G	✓	44	12	1	10
HALOSTAR SUPERSTAR 35 W	4052899 <b>195318</b>	1	50	35	765	G	✓	44	12	2	20
OSRAM HALOSTAR® STAR G4, 12V <sup>1</sup> , Clear, Folding box/Blister											
HALOSTAR STAR 5 W	4058075 <b>094154</b>	3	5	5	55	G	✓	33	10	1	40
HALOSTAR STAR 5 W	4008321 <b>201799</b>	3	5	5	55	G	✓	33	10	2	20
HALOSTAR STAR 10 W	4058075 <b>094178</b>	4	10	10	145	G	✓	33	10	1	16
HALOSTAR STAR 10 W	4008321 <b>201812</b>	4	10	10	145	G	✓	33	10	2	20
HALOSTAR STAR 20 W	4058075 <b>094215</b>	4	20	20	375	G	✓	33	10	1	16
HALOSTAR STAR 20 W	4008321 <b>201836</b>	4	20	20	375	G	✓	33	10	2	20
GY6.35, 12V <sup>1</sup> , Clear, Folding box/Blister											
HALOSTAR STAR 35 W	4058075 <b>094253</b>	4	35	35	765	G	✓	44	12	1	16
HALOSTAR STAR 35 W	4008321 <b>201874</b>	4	35	35	765	G	✓	44	12	2	20
HALOSTAR STAR 50 W	4058075 <b>094277</b>	4	50	50	1 185	G	✓	44	12	1	16
HALOSTAR STAR 50 W	4008321 <b>202161</b>	4	50	50	1 185	G	✓	44	12	2	20

<sup>&</sup>lt;sup>1</sup> Compatible with many commercially available electronic drivers. Details can be found under www.ledvance.com/consumer/services/downloads/ | <sup>2</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)



### **COMPACT FLUORESCENT LAMPS**



COMPACT FLUORESCENT LAMPS WITH PLUG BASE



### COMPACT FLUORESCENT LAMPS: HIGH-QUALITY LIGHT FOR SPECIAL DEMANDS

OSRAM branded compact fluorescent lamps will continue to be available after September 1, 2021. With their efficiency, reliability and long service life, they remain the preferred alternatives to conventional incandescent lamps for some customers and some applications.

LEDVANCE has long been offering attractive, energy-efficient LED replacements for those CFLs that are being phased out.





-







Product name	GTIN (EAN)	No.	W	lm	l land		[mm]	Ø d [mm]		
OSRAM DULUX® T PLUS GX24d-1, Folding box										
DULUX T PLUS 13W	4050300 <b>446905</b>	1	13	900	G	LUMILUX Cool White	113	11	1	10
GX24d-2, 100V, Folding box DULUX T PLUS 18W	4050300 <b>333502</b>	1	18	1 200	G	LUMILUX INTERNA	124	12	1	10
DULUX T PLUS 18W	4050300 <b>333465</b>	1	18	1 200	G	LUMILUX Cool White	124	12	1	10
GX24d-3, Folding box										
DULUX T PLUS 26W	4050300 <b>342085</b>	1	26	1800	G	LUMILUX INTERNA	139	11	1	10
DULUX T PLUS 26W	4050300 <b>342047</b>	1	26	1800	G	LUMILUX Cool White	139	11	1	10

 $<sup>^{\</sup>mbox{\tiny 1}}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)



.







Product name	GTIN (EAN)	No.	W	lm	a a a a a a a a a a a a a a a a a a a			[mm]	Ø d [mm]		
OSRAM DULUX® T/E PLUS GX24q-1, Folding box											
DULUX T/E PLUS 13W	4050300 <b>447001</b>	1	13	900	G	LUMILUX INTERNA	$\checkmark$	106	11	1	10
DULUX T/E PLUS 13W	4050300 <b>446967</b>	1	13	900	G	LUMILUX Cool White	✓	106	11	1	10
GX24q-2, 100V, Folding box											
DULUX T/E PLUS 18W	4050300 <b>342269</b>	1	18	1 200	G	LUMILUX INTERNA	✓	117	12	1	10
DULUX T/E PLUS 18W	4050300 <b>342221</b>	1	18	1 200	G	LUMILUX Cool White	✓	117	12	1	10
GX24q-3, 100V, Folding box											
DULUX T/E PLUS 26W	4050300 <b>342320</b>	1	26	1800	G	LUMILUX INTERNA	✓	132	12	1	10
DULUX T/E PLUS 26W	4050300 <b>342283</b>	1	26	1800	G	LUMILUX Cool White	✓	132	12	1	10
DULUX T/E PLUS 32W	4050300 <b>348605</b>	1	32	2400	G	LUMILUX INTERNA	✓	148	12	1	10
DULUX T/E PLUS 32W	4050300 <b>348568</b>	1	32	2400	G	LUMILUX Cool White	√	148	12	1	10
GX24q-4, 135V, Folding box											
DULUX T/E PLUS 42W	4050300 <b>425665</b>	1	42	3200	G	LUMILUX INTERNA	✓	169	12	1	10
DULUX T/E PLUS 42W	4050300 <b>425627</b>	1	42	3200	G	LUMILUX Cool White	✓	169	12	1	10

 $<sup>^{\</sup>rm 1}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)











Product name	GTIN (EAN)	No.	W	lm	l hand			Ø d [mm]		<b>6</b>
OSRAM DULUX® D G24d-1, Folding box										
DULUX D 10W	4050300 <b>008110</b>	1	10	600	G	LUMILUX INTERNA	110	11	1	10
DULUX D 10W	4050300 <b>010595</b>	1	10	600	G	LUMILUX Cool White	110	11	1	10
DULUX D 13W	4050300 <b>008127</b>	1	13	900	G	LUMILUX INTERNA	138	11	1	10
DULUX D 13W	4050300 <b>010625</b>	2	13	900	G	LUMILUX Cool White	138	11	1	10
G24d-2, Folding box										
DULUX D 18W	4050300 <b>011462</b>	1	18	1 200	G	LUMILUX INTERNA	153	11	1	10
DULUX D 18W	4050300 <b>012056</b>	1	18	1 200	G	LUMILUX Cool White	153	11	1	10
G24d-3, Folding box	405000044444			1000	0	LUMIUW INTERNA	470			
DULUX D 26W	4050300 <b>011912</b>	1	26	1800	G	LUMILUX INTERNA	172	11	1	10
DULUX D 26W	4050300 <b>012049</b>	1	26	1 800	G	LUMILUX Cool White	172	11	1	10

 $<sup>^{\</sup>mbox{\tiny 1}}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)











Product name	GTIN (EAN)	No.	W	lm					Ø d [mm]		
OSRAM DULUX® D/E											
G24q-1, Folding box											
DULUX D/E 10W	4050300 <b>012124</b>	1	10	600	G	LUMILUX INTERNA	✓	103	12	1	10
DULUX D/E 10W	4050300 <b>017587</b>	1	10	600	G	LUMILUX Cool White	✓	103	12	1	10
DULUX D/E 13W	4050300 <b>012131</b>	2	13	900	G	LUMILUX INTERNA	$\checkmark$	131	12	1	10
DULUX D/E 13W	4050300 <b>017594</b>	2	13	900	G	LUMILUX Cool White	✓	131	12	1	10
G24q-2, Folding box											
DULUX D/E 18W	4050300 <b>012148</b>	1	18	1 200	G	LUMILUX INTERNA	✓	146	12	1	10
DULUX D/E 18W	4050300 <b>017617</b>	1	18	1200	G	LUMILUX Cool White	✓	146	12	1	10
G24q-3, Folding box											
DULUX D/E 26W	4050300 <b>012230</b>	2	26	1800	G	LUMILUX INTERNA	✓	165	12	1	10
DULUX D/E 26W	4050300 <b>020303</b>	2	26	1800	G	LUMILUX Cool White	✓	165	12	1	10

 $<sup>^{\</sup>rm 1}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)













Product name	GTIN (EAN)	No.	W	lm	i band		[mm]	Ø d [mm]		<b>3</b>
OSRAM DULUX® S G23, 35V/60V, Folding box										
DULUX S 5W	4050300 <b>006130</b>	1	5	257	G	LUMILUX INTERNA	108	-	1	10
DULUX S 7W	4050300 <b>005997</b>	2	7	400	G	LUMILUX INTERNA	137	12	1	10
DULUX S 7W	4050300 <b>010571</b>	1	7	400	G	LUMILUX Cool White	137	12	1	10
DULUX S 9W	4050300 <b>006000</b>	2	9	600	G	LUMILUX INTERNA	168	12	1	10
DULUX S 9W	4050300 <b>010588</b>	1	9	600	G	LUMILUX Cool White	168	12	1	10
DULUX S 11W	4050300 <b>006017</b>	2	11	900	G	LUMILUX INTERNA	237	12	1	10
DULUX S 11W	4050300 <b>010618</b>	1	11	900	G	LUMILUX Cool White	237	12	1	10
DULUX S 11W	4050300 <b>010618</b>	1	11	900	G	LUMILUX Cool White	237	12	1	10

 $<sup>^{\</sup>mbox{\tiny 1}}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)









Product name	GTIN (EAN)	No.	W	lm				[mm]	Ø d [mm]		<b>6</b>
OSRAM DULUX® S/E 2G7, 47V/60V/48V, Folding box											
DULUX S/E 7W	4050300 <b>017648</b>	1	7	400	G	LUMILUX INTERNA	✓	121.8	12	1	10
DULUX S/E 7W	4050300 <b>020167</b>	1	7	400	G	LUMILUX Cool White	✓	114	12	1	10
DULUX S/E 9W	4050300 <b>017655</b>	1	9	580	G	LUMILUX INTERNA	✓	145	38.1	1	10
DULUX S/E 9W	4050300 <b>020174</b>	1	9	580	G	LUMILUX Cool White	✓	145	38.1	1	10
DULUX S/E 11W	4050300 <b>017662</b>	1	11	900	G	LUMILUX INTERNA	✓	214	11	1	10
DULUX S/E 11W	4050300 <b>020181</b>	1	11	900	G	LUMILUX Cool White	✓	214	12	1	10

 $<sup>^{\</sup>rm 1}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)



COOL






Product name	GTIN (EAN)	No.	W	lm				[mm]	Ø d [mm]		
OSRAM DULUX® L 2G11, Folding box											
DULUX L 18W	4050300 <b>010748</b>	1	18	1200	G	LUMILUX INTERNA	✓	217	17.5	1	10
DULUX L 18W	4050300 <b>010724</b>	1	18	1200	G	LUMILUX Cool White	$\checkmark$	217	17.5	1	10
DULUX L 24W	4050300 <b>010779</b>	1	24	1800	G	LUMILUX INTERNA	✓	317	17.5	1	10
DULUX L 24W	4050300 <b>010755</b>	1	24	1800	G	LUMILUX Cool White	✓	317	17.5	1	10
DULUX L 36W	4050300 <b>010786</b>	1	36	2900	G	LUMILUX Cool White	✓	411	17.5	1	10
DULUX L 36W	4050300 <b>010809</b>	1	36	2900	G	LUMILUX INTERNA	✓	411	17.5	1	10
DULUX L 40W	4050300 <b>279909</b>	1	40	3500	G	LUMILUX Cool White	✓	533	17.5	1	10
DULUX L 55W	4050300 <b>315881</b>	1	55	4800	G	LUMILUX INTERNA	✓	533	17.5	1	10
DULUX L 55W	4050300 <b>295879</b>	1	55	4800	G	LUMILUX Cool White	✓	533	17.5	1	10
DULUX L 80W	4050300 <b>665481</b>	1	80	6000	G	LUMILUX Cool White	✓	565	17.5	1	10

 $<sup>^{\</sup>rm 1}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)



## **FLUORESCENT LAMPS**



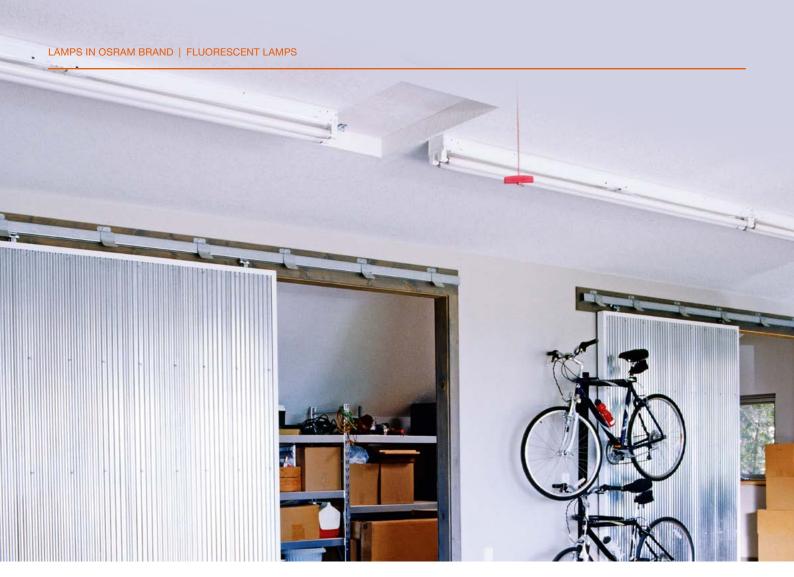

# FLUORESCENT LAMPS: RELIABLE LIGHT FOR SO MANY APPLICATIONS

OSRAM branded fluorescent lamps have a long service life and very good price/performance ratio. This proven type of lamp comprises T5 tubes (Ø 16 mm), T8 tubes (Ø 26 mm) and lamps in special shapes (U-shape).

They are available in different light colors, making them suitable for a wide range of applications:



#### **LUMILUX Cool White - light color 840**

- Natural white light that also works well in combination with daylight
- Excellent for utility and hobby rooms



#### **LUMILUX** Warm White – light color 827

- Cozy and pleasant, but nevertheless bright light
- A perfect choice for all living rooms and bedrooms



#### **LUMILUX Cool Daylight – light color 865**

- Light similar to natural daylight
- Ideal for lighting work areas at home

#### FLUORESCENT LAMPS FOR SPECIAL APPLICATIONS

The BIOLUX fluorescent lamp with light color 965 provides excellent lighting for raising small animals.

#### SAFE, DURABLE, RELIABLE: OUR HIGH-QUALITY OSRAM BRAND STARTERS

The LONGLIFE and DEOS SAFETY families of starters offer impressive quality, economy and reliability.



-







Product name	GTIN (EAN)	No.	W	lm	bood 1			[mm]	Ø d [mm]		
LUMILUX® T8 G13, 90V/18.0V/103V/110V, Sleeve											
T8 RELAX L 15 W	4050300 <b>325613</b>	1	15	950	G	LUMILUX INTERNA	✓	438	26	1	10
T8 RELAX L 16 W	4050300 <b>325637</b>	1	16	1 2 5 0	G	LUMILUX INTERNA	✓	720	26	1	10
T8 RELAX L 18 W	4050300 <b>325675</b>	1	18	1350	G	LUMILUX INTERNA	✓	590	26	1	10
T8 RELAX L 30 W	4050300 <b>325651</b>	1	30	2400	G	LUMILUX INTERNA	✓	895	26	1	10
T8 RELAX L 36 W	4050300 <b>325699</b>	1	36	3350	G	LUMILUX INTERNA	✓	1200	26	1	10
T8 RELAX L 58 W	4050300 <b>325712</b>	1	58	5200	G	LUMILUX INTERNA	✓	1 500	26	1	10
G13, 90V/57.0V, Sleeve											
T8 ACTIVE L 15 W	4008321 <b>064325</b>	1	15	950	G	LUMILUX Cool White	✓	438	26	1	10
T8 ACTIVE L 16 W	4008321 <b>064301</b>	1	16	1 250	G	LUMILUX Cool White	✓	720	26	1	10
T8 GCTIVE L 18 W	4050300 <b>336800</b>	1	18	1350	G	LUMILUX Cool White	✓	590	26	1	10
T8 ACTIVE L 30 W	4050300 <b>336947</b>	1	30	2400	G	LUMILUX Cool White	✓	895	26	1	10
T8 ACTIVE L 36 W	4050300 <b>336763</b>	1	36	3350	G	LUMILUX Cool White	✓	1200	26	1	10
T8 ACTIVE L 58 W	4050300 <b>336787</b>	1	58	5200	G	LUMILUX Cool White	✓	1500	26	1	10

 $<sup>^{\</sup>mbox{\tiny 1}}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)









GTIN (EAN)	No.	W	lm	land 1			[mm]	Ø d [mm]		
	1					-			1	10
4050300 <b>325750</b>	1	13	950	G	LUMILUX INTERNA	-	517	16	1	10
4008321 <b>916020</b>	2	14	1200	F	LUMILUX INTERNA	$\checkmark$	549	16	1	10
4008321 <b>912138</b>	2	21	1 900	F	LUMILUX INTERNA	✓	849	16	1	10
4008321 <b>916044</b>	2	28	2600	F	LUMILUX INTERNA	✓	1 149	16	1	10
4008321 <b>067241</b>	1	8	430	G	LUMILUX Cool White	-	288	16	1	10
4008321 <b>067210</b>	-	13	950	G	LUMILUX Cool White	-	517	16	1	10
4008321 <b>916013</b>	2	14	1200	F	LUMILUX Cool White	✓	549	16	1	10
4008321 <b>912114</b>	2	21	1 900	F	LUMILUX Cool White	✓	849	16	1	10
4008321 <b>916037</b>	2	28	2600	F	LUMILUX Cool White	✓	1 149	16	1	10
4008321 <b>025050</b>	1	6	270	Α	Cool White	-	212	16	1	10
4008321 <b>025081</b>	1	8	385	Α	Cool White	-	288	16	1	10
4008321 <b>025524</b>	1	13	830	А	Cool White	-	517	16	1	10
	4050300336961 4050300325750 4008321916020 4008321912138 4008321916044 4008321067241 4008321067210 4008321916013 4008321916037 4008321916037	4050300336961 1 4050300325750 1 4008321916020 2 4008321912138 2 4008321916044 2  4008321067241 1 4008321067210 - 4008321916013 2 4008321916013 2 4008321916013 2 4008321916013 1 4008321025050 1 4008321025050 1	4050300336961 1 8 4050300325750 1 13 4008321916020 2 14 4008321912138 2 21 4008321916044 2 28 4008321067241 1 8 4008321067210 - 13 4008321916013 2 14 4008321916013 2 14 4008321916013 2 28 400832105050 1 6 4008321025050 1 6	4050300336961 1 8 430 4050300325750 1 13 950 4008321916020 2 14 1200 4008321912138 2 21 1900 4008321916044 2 28 2600 4008321067241 1 8 430 4008321067210 - 13 950 4008321916013 2 14 1200 4008321916013 2 14 1200 4008321914 2 21 1900 4008321916037 2 28 2600	4050300336961 1 8 430 G 4050300325750 1 13 950 G 4008321916020 2 14 1200 F 4008321916044 2 28 2600 F  4008321067241 1 8 430 G 4008321067210 - 13 950 G 4008321916013 2 14 1200 F 4008321916013 2 14 1200 F 4008321916013 2 14 1200 F 4008321916037 2 28 2600 F	4050300336961 1 8 430 G LUMILUX INTERNA 4050300325750 1 13 950 G LUMILUX INTERNA 4008321916020 2 14 1200 F LUMILUX INTERNA 4008321916044 2 28 2600 F LUMILUX INTERNA 4008321916044 1 8 430 G LUMILUX INTERNA 4008321067241 1 8 430 G LUMILUX Cool White 4008321067210 - 13 950 G LUMILUX Cool White 4008321916013 2 14 1200 F LUMILUX Cool White 40083219114 2 21 1900 F LUMILUX Cool White 4008321916037 2 28 2600 F LUMILUX Cool White 4008321916037 1 6 270 A Cool White 4008321025050 1 6 270 A Cool White	4050300336961 1 8 430 G LUMILUX INTERNA - 4050300325750 1 13 950 G LUMILUX INTERNA - 4008321916020 2 14 1200 F LUMILUX INTERNA ✓ 4008321912138 2 21 1900 F LUMILUX INTERNA ✓ 4008321916044 2 28 2600 F LUMILUX INTERNA ✓  4008321067241 1 8 430 G LUMILUX INTERNA ✓ 4008321067210 - 13 950 G LUMILUX Cool White - 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 4008321912114 2 21 1900 F LUMILUX Cool White ✓ 4008321916037 2 28 2600 F LUMILUX Cool White ✓ 4008321916037 1 6 270 A Cool White ✓ 4008321025050 1 6 270 A Cool White - 4008321025050 1 8 385 A Cool White -	4050300336961 1 8 430 G LUMILUX INTERNA - 288 4050300325750 1 13 950 G LUMILUX INTERNA - 517 4008321916020 2 14 1200 F LUMILUX INTERNA ✓ 549 4008321912138 2 21 1900 F LUMILUX INTERNA ✓ 849 4008321916044 2 28 2600 F LUMILUX INTERNA ✓ 1149  4008321067241 1 8 430 G LUMILUX Cool White - 288 4008321067210 - 13 950 G LUMILUX Cool White - 517 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 549 400832191414 2 21 1900 F LUMILUX Cool White ✓ 849 4008321916037 2 28 2600 F LUMILUX Cool White ✓ 849 4008321916037 2 28 2600 F LUMILUX Cool White ✓ 1149	4050300336961 1 8 430 G LUMILUX INTERNA - 288 16 4050300325750 1 13 950 G LUMILUX INTERNA - 517 16 4008321916020 2 14 1200 F LUMILUX INTERNA ✓ 549 16 4008321912138 2 21 1900 F LUMILUX INTERNA ✓ 849 16 4008321916044 2 28 2600 F LUMILUX INTERNA ✓ 1149 16  4008321067241 1 8 430 G LUMILUX Cool White - 288 16 4008321067210 - 13 950 G LUMILUX Cool White - 517 16 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 549 16 4008321912114 2 21 1900 F LUMILUX Cool White ✓ 549 16 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 549 16 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 549 16 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 549 16 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 1149 16	4050300336961 1 8 430 G LUMILUX INTERNA - 288 16 1 4050300325750 1 13 950 G LUMILUX INTERNA - 517 16 1 4008321916020 2 14 1200 F LUMILUX INTERNA ✓ 549 16 1 4008321912138 2 21 1900 F LUMILUX INTERNA ✓ 849 16 1 4008321916044 2 28 2600 F LUMILUX INTERNA ✓ 1149 16 1  4008321067241 1 8 430 G LUMILUX Cool White - 288 16 1 4008321067210 - 13 950 G LUMILUX Cool White - 517 16 1 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 549 16 1 4008321912114 2 21 1900 F LUMILUX Cool White ✓ 549 16 1 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 549 16 1 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 549 16 1 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 549 16 1 4008321916013 2 14 1200 F LUMILUX Cool White ✓ 1149 16 1 400832192037 2 28 2600 F LUMILUX Cool White ✓ 1149 16 1

 $<sup>^{\</sup>rm 1}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)











Product name	GTIN (EAN)	No.	W	lm	l man		[mm]	Ø d [mm]		<b>6</b>
Circular LUMILUX® T5 FC 2GX13, 126V, Folding box										
Circular T5 FC 22 W	4050300 <b>646237</b>	1	22	1900	G	LUMILUX INTERNA	230	16	1	12
Circular T5 FC 40 W	4050300 <b>646251</b>	2	40	3400	G	LUMILUX INTERNA	305	16	1	12
Circular T5 FC 55 W	4050300 <b>646275</b>	2	55	4200	G	LUMILUX INTERNA	305	16	1	12
Circular T5 FC 22 W	4050300 <b>528465</b>	3	22	1 900	G	LUMILUX Cool White	230	16	1	12
Circular T5 FC 40 W	4050300 <b>528526</b>	3	40	3 3 0 0	G	LUMILUX Cool White	315	16	1	12
Circular T5 FC 55 W	4050300 <b>528588</b>	3	55	4200	G	LUMILUX Cool White	305	16	1	12
Circular LUMILUX® T9 G10q, 62V/84V, Sleeve										
Circular T9 C 22 W	4008321 <b>581068</b>	4	22	1 350	G	LUMILUX INTERNA	216	216	1	12
Circular T9 C 32 W	4008321 <b>581129</b>	4	32	2 2 5 0	G	LUMILUX INTERNA	305	305	1	12
Circular T9 C 22 W	4008321 <b>581082</b>	4	22	1 350	G	LUMILUX Cool White	216	216	1	12
Circular T9 C 32 W	4008321 <b>581143</b>	4	32	2 2 5 0	G	LUMILUX Cool White	305	305	1	12
Circular T9 C 40 W	4050300 <b>014845</b>	4	40	3 200	G	LUMILUX Cool White	406	406	1	12
Circular T9 C 40 W	4008321 <b>960139</b>	4	40	3040	G	LUMILUX Cool Daylight	406	406	1	12

 $<sup>^{\</sup>mbox{\tiny 1}}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)



.







GTIN (EAN)	No.	W	lm				Ø d [mm]		<b>a</b>
4008321 <b>959904</b>	1	18	1350	G	LUMILUX Warm White	310	26	1	24
4008321 <b>959911</b>	1	36	3350	G	LUMILUX Warm White	607	26	1	12
4008321 <b>959041</b>	1	58	5 2 2 0	G	LUMILUX Warm White	765	26	1	12
4008321 <b>469168</b>	1	18	1350	G	LUMILUX Cool White	310	26	1	24
4008321 <b>469182</b>	1	36	3350	G	LUMILUX Cool White	607	26	1	12
4008321 <b>469205</b>	1	58	5 2 2 0	G	LUMILUX Cool White	765	26	1	12
	4008321 <b>959904</b> 4008321 <b>959911</b> 4008321 <b>959041</b> 4008321 <b>469168</b> 4008321 <b>469182</b>	4008321959904 1 4008321959911 1 4008321959041 1 4008321469168 1 4008321469182 1	4008321959904 1 18 4008321959911 1 36 4008321959941 1 58 4008321469168 1 18 4008321469182 1 36	4008321959904 1 18 1350 4008321959911 1 36 3350 4008321959041 1 58 5220 4008321469168 1 18 1350 4008321469182 1 36 3350	4008321959904 1 18 1350 G 4008321959911 1 36 3350 G 4008321959041 1 58 5220 G 4008321469168 1 18 1350 G 4008321469182 1 36 3350 G	4008321959904 1 18 1350 G LUMILUX Warm White 4008321959911 1 36 3350 G LUMILUX Warm White 4008321959041 1 58 5220 G LUMILUX Warm White 4008321469168 1 18 1350 G LUMILUX Cool White 4008321469182 1 36 3350 G LUMILUX Cool White	4008321959904 1 18 1350 G LUMILUX Warm White 310 4008321959904 1 36 3350 G LUMILUX Warm White 607 4008321959041 1 58 5220 G LUMILUX Warm White 765 4008321469168 1 18 1350 G LUMILUX Cool White 310 4008321469182 1 36 3350 G LUMILUX Cool White 607	4008321959904 1 18 1350 G LUMILUX Warm White 310 26 4008321959904 1 36 3350 G LUMILUX Warm White 607 26 4008321959041 1 58 5220 G LUMILUX Warm White 765 26 4008321469168 1 18 1350 G LUMILUX Cool White 310 26 4008321469182 1 36 3350 G LUMILUX Cool White 607 26	4008321959904 1 18 1350 G LUMILUX Warm White 310 26 1 4008321959911 1 36 3350 G LUMILUX Warm White 607 26 1 4008321959041 1 58 5220 G LUMILUX Warm White 765 26 1 4008321469168 1 18 1350 G LUMILUX Cool White 310 26 1 4008321469182 1 36 3350 G LUMILUX Cool White 607 26 1

 $<sup>^{\</sup>rm 1}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)





Product name	GTIN (EAN)	No.	W	lm	be 1		[mm]	Ø d [mm]		
BIOLUX® T8 G13, 57V/96V/103V/110V, Sleeve										
T8 BIOLUX L 18 W	4050300 <b>937939</b>	1	18	1000	G	BIOLUX	590	26	1	10
T8 BIOLUX L 30 W	4050300 <b>937946</b>	1	30	1 600	G	BIOLUX	895	26	1	10
T8 BIOLUX L 36 W	4050300 <b>937977</b>	1	36	2300	G	BIOLUX	1 200	26	1	10
T8 BIOLUX L 58 W	4050300 <b>938004</b>	1	58	3700	G	BIOLUX	1500	26	1	10

 $<sup>^{\</sup>mbox{\tiny 1}}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)









Product name	GTIN (EAN)	No.	W	[mm]	Ø d [mm]		
STARTER 220-240V, Blister							
ST 171 SAFETY DEOS	4050300 <b>421544</b>	1	65	40.3	21.5	1	10
ST 111 LONGLIFE	4050300 <b>064000</b>	2	65	40.3	21.5	2	20
ST 151 LONGLIFE 1	4050300 <b>092638</b>	3	22	40.3	21.5	2	20





# **SPECIAL LAMPS**



SPECIAL LAMPS 128









										_
Product name	GTIN (EAN)	No.	W	lm	i i i i i i i i i i i i i i i i i i i		[mm]	Ø d [mm]		<b>a</b>
Oven lamp T pygmy shape E14, 230V, Clear, Blister										
SPECIAL T OVEN 15 W	4050300 <b>065052</b>	1	15	85	G	Warm White	50	22	1	10
E14, 230V, Clear, Folding box										
SPECIAL T OVEN 15 W	4050300 <b>003108</b>	1	15	85	G	Warm White	50	22	1	100

 $<sup>^{\</sup>rm 1}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)







Product name	GTIN (EAN)	No.	W	lm				Ø d [mm]		<b>6</b>
Refrigerator lamp T pygmy shape E14, 230V, Clear, Blister										
SPECIAL T 15 W	4050300 <b>092928</b>	1	15	90	G	Warm White	54	17	1	10

 $<sup>^{\</sup>mbox{\tiny 1}}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)







											$\smile$
Product name	GTIN (EAN)	No.	W	lm	TANK TO SERVICE TO SER			[mm]	Ø d [mm]		<b>a</b>
Sewing machine/refrigerator lamp T pygmy shape E14, 230V, Frosted/Clear, Folding box											
SPECIAL T 15 W	4050300 <b>003085</b>	1	15	90	G	Warm White	$\checkmark$	55	26	1	100
SPECIAL T 25 W	4050300 <b>323596</b>	1	25	160	G	Warm White	✓	55	26	1	100
SPECIAL T 15 W	4050300 <b>310282</b>	1	15	90	G	Warm White	✓	55	26	1	100
SPECIAL T 25 W	4050300 <b>309637</b>	1	25	160	G	Warm White	✓	55	26	1	100

 $<sup>^{\</sup>mbox{\tiny 1}}$  Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)



# **ALPHABETICAL PRODUCT INDEX LAMPS**

В	
BIOLUX® T8	123
С	
CIRCULAR LUMILUX® T5 FC/T9 FC	121
L	
LED LINE	79
LED PIN high voltage	78
LED PIN low voltage	77
LED SLIM LINE	79
LED SPECIAL T SLIM	80
LED SPECIAL T	81
LED STAR CLASSIC A FILAMENT GLASS	32, 33
LED STAR CLASSIC A WITH HEATSINK	44
LED STAR CLASSIC B FILAMENT GLASS	36, 37, 38
LED STAR CLASSIC P FILAMENT GLASS	40, 41
LED STAR DECO CLASSIC A	73
LED STAR GX53	81
LED STAR PAR16	50
LED STAR R39/R50/R63/R80	53
LED STAR STICK FLAME	47
LED STAR STICK FROSTED	47
LED STAR+ DAYLIGHT SENSOR CLASSIC	62
LED STAR+ GLOWDIM	59
LED STAR+ MOTION SENSOR CLASSIC	62
LED STAR+ RELAX & ACTIVE	61
LED STAR+ RGBW REMOTE CONTROL	65
LED STAR+ THREE STEP DIM	57
LED SUPERSTAR AND STAR CLASSIC Mirror	74
LED SUPERSTAR AND STAR CLASSIC B WITH HEATSINK	45
LED SUPERSTAR AND STAR CLASSIC GLOBE AND EDISON	42
LED SUPERSTAR AND STAR CLASSIC P WITH HEATSINK	46
LED SUPERSTAR AND STAR MR11	55
LED SUPERSTAR AND STAR MR16	54
LED SUPERSTAR CLASSIC A FILAMENT GLASS	31
LED SUPERSTAR CLASSIC A WITH HEATSINK	43
LED SUPERSTAR CLASSIC B FILAMENT GLASS	34, 35
LED SUPERSTAR CLASSIC P FILAMENT GLASS	39
LED SUPERSTAR PAR16	49
LED SUPERSTAR PAR20/PAR30/PAR38	51
LED SUPERSTAR R50/R63/R80	52
LED SUPERSTAR+ CLASSIC A FILAMENT GLASS	93
LED SUPERSTAR+ CLASSIC B FILAMENT GLASS	94
LED SUPERSTAR+ CLASSIC EDISON FILAMENT GLASS	97
LED SUPERSTAR+ CLASSIC GLOBE FILAMENT GLASS	96
LED SUPERSTAR+ CLASSIC P FILAMENT GLASS	95

ED SUPERSTAR+ CLASSIC STICK	98
LED SUPERSTAR+ MR16	99
LED SUPERSTAR+ R50/R63/R80	98
LED SUPERSTAR+ SPOT PAR16	98
LUMILUX® T5	120
LUMILUX® T8	119
LOWILLOX TO	113
DSRAM DULUX® D	111
DSRAM DULUX® D/E	112
DSRAM DULUX® D LED EM/HF	82
DSRAM DULUX® L	115
DSRAM DULUX® S	113
DSRAM DULUX® S/E	114
OSRAM DULUX® S/F/L LED EM	83
OSRAM DULUX® T PLUS	109
OSRAM DULUX® T/E PLUS	110
OSRAM HALOLINE® STAR	103
OSRAM HALOPIN® SUPERSTAR	104
OSRAM HALOSTAR® SUPERSTAR/STAR	105
OSRAM LED CIRCOLUX	84
DSRAM LEDinestra®	87
OSRAM SubstiTUBE® STAR EM	89
OSRAM SubstiTUBE® STAR EM PC	89
OSRAM SubstiTUBE® Motion Sensor	90
DSRAM SubstiTUBE® T9	84
Oven lamp T pygmy shape	128
₹	
Refrigerator lamp T pygmy shape	129
3	
Sewing machine/refrigerator lamp T pygmy shape	130
Starters	
Starter	124
J	400
J-shaped T8	122
,	
// // 1000® LED DEKOD	
/intage 1906® LED DEKOR /intage 1906® LED DIM GOLD	70
0	67
/intage 1906® LED DIM SMOKE	67
/intage 1906® LED GOLD /intage 1906® LED SPIRAL FILAMENT GOLD	68
/intage 1900° LED SPIRAL FILAMENT GOLD	69

### **SYMBOLS IN THE TABLES**



Any manipulation of our products or packaging, including but not limited to modification, reworking or restamping, is prohibited and infringes our registered trademark rights. Such modifications may impair the technical properties of our products, destroy them or cause consequential damage or injury, for which LEDVANCE cannot under any circumstances be held responsible.

For more information on our products, go to: www.ledvance.de www.ledvance.com

Subject to change without notice. Errors and omissions excepted. The pictures in the catalog are for illustration purposes only.

# 902K013XX 10/21 LEDVANCE S EU-W MK RET Subject to change without notice. Errors and omission excepted.

#### **ABOUT LEDVANCE**

With offices in more than 50 countries and business activities in more than 140 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and end consumers. Having emerged from OSRAM's general lighting division, LEDVANCE offers a wide-ranging portfolio of LED luminaires for a broad spectrum of applications, intelligent lighting products for Smart Home and Smart Building solutions, one of the most comprehensive ranges of advanced LED lamps in the lighting industry, traditional light sources, an LED Strip System and light management systems.



Customer Service Centre: kundenservice.retail@ledvance.com

Germany:

Phone: +49 89 780673-670 Fax: +49 89 780670-665 LEDVANCE GmbH Parkring 29-33 85748 Garching Germany

**LEDVANCE.COM** 

LEDVANCE is licensee of product trademark OSRAM for lamps products in general lighting.

