

LEDVANCEUS.COM

LEDVANCE


# NEXT LEVEL LIGHTING

## DUAL SELECTABLE T-FIT™

VALUE  
CLASS

### SIMPLIFYING YOUR WORK

- DUAL SELECTABLE: Three wattages and three CCTs in the same luminaire.
- Simple and easy to install, the four bars connect with a click and fits into existing T-grid ceilings.
- Reduced packaging size and transportation costs.

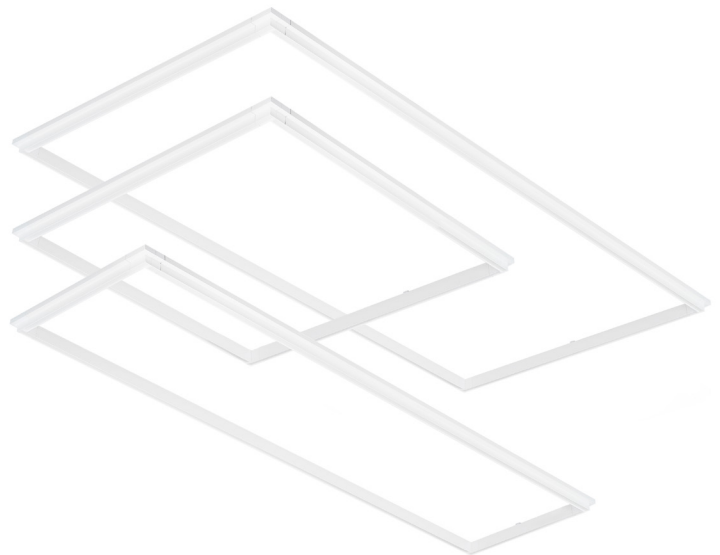

Check with sales rep on TAA inventory.

## ORDERING GUIDE

PANELBAR	1A	S/XX	UNH	D	8	SC7	/ XX	WH
PRODUCT NAME	GENERATION	WATTAGE	VOLTAGE	DIMMING	CRI	COLOR TEMP	DIMENSIONS	COLOR/FINISH
PANELBAR = LED Panel Bars	1A = Generation 1A	S35 = 25/30/35W S45 = 35/40/45W	UNH = 120-347V	D = 0-10V	8 = >80	SC7 = 3500/4000/5000K	14 = 1 x 4 22 = 2 x 2 24 = 2 x 4	WH = White

## FEATURES



### COMPACT

Product is shipped disassembled to reduce shelf space, as well as shipping and handling costs.


### INSTALLATION

Snap the bars together to form the final product. Assemble in minutes!



### MODERN DESIGN

Decorative, modern design, all while maintaining a lumen output comparable to a standard flat LED panel.

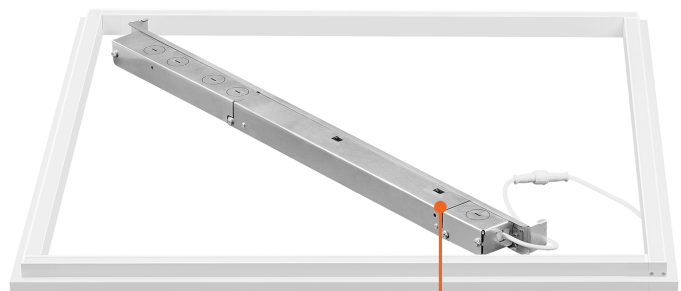

### ASSORTED SIZES

Comes in a 1X4, 2X2 or 2X4 option.

### DUAL SELECTABILITY

CCT and Wattage selectability located via switches on the driver.

## ACCESSORIES



REPLACEMENT TILE  
63050 | 63051 | 63052



EMERGENCY BATTERY  
BACK-UP UNIT  
60888



BRACKET FOR EMERGENCY  
BATTERY BACK-UP UNIT  
63217

LEDVANCE LLC  
181 Ballardvale Street, Suite 203  
Wilmington, MA 01887 USA  
Phone: 1-800-LIGHTBULB (1-800-544-4828)  
www.ledvanceUS.com

LEDVANCE is a registered trademark.  
All other trademarks are those of their respective owners.  
Specifications subject to change without notice



SCAN TO FOLLOW US  
ON SOCIAL MEDIA



Spec Sheet



Install Guide