


DIMMER COMPATIBILITY CLASSIC P

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

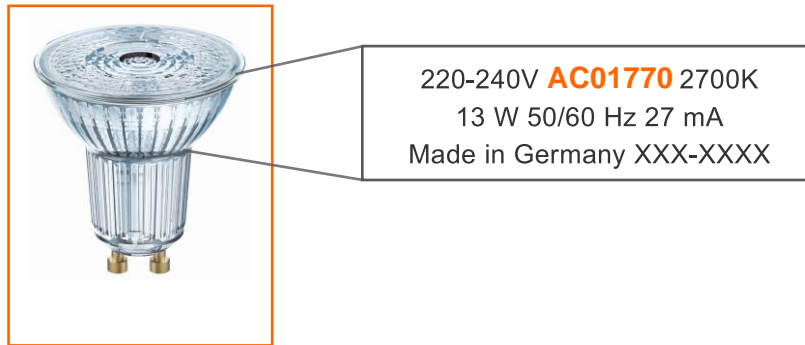

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
 Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36°				SUPERSTAR PAR16 50 36°				SUPERSTAR PAR16 80 36°				SUPERSTAR PAR16 80 120°				
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																					
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																					
Undesired dimmability																					
Not relevant																					
Not tested																					
EAN/Basic Code					4052839330153/AC01184				405283933017/AC01187				4052839330218/AB41905				405807503688/AC03043				
EAN/Basic Code					4052839330157/AC01182				4052839330195/AC01184				4052839330232/AB41906				405807503682/AC03051				
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		
Brand	Model	Voltage range	Power	Type	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%	
ABB	STD 50-3	230/50Hz	60-500	L	1-10	98% - 15%	2-10	97% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-20	98% - 27%	1-20	98% - 26%	1-20	97% - 27%	1-20	97% - 27%	
Altenburger Electronic	50_30	230/50Hz	15-350	T	1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%	2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%	
ALPORA	DSP 400	230/50Hz	400	L	3-19	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%	2-20	99% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%	
Berker	2861	230/50Hz	50-420	U	1-10	96% - 22%	1-10	97% - 26%	1-10	98% - 16%	1-9	97% - 15%	1-10	98% - 1%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	
Blicino	L/NNT441N	230/50Hz			1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	
Blicino	L/NNT4408	230/50Hz			2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-20	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	
Blicino	NT4402N	230/50Hz	500	R	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	
Busch-Jaeger	6513 U-102	230/50Hz	40-420	T	1-10	98% - 1%	1-10	97% - 35%	1-5	97% - 1%	1-5	97% - 1%	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%	
Busch-Jaeger	6523 U-102	230/50Hz	420	T	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	
Busch-Jaeger	2250 U	230/50Hz	60-600	L	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-10	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	
Busch-Jaeger	6526 U	230/50Hz																			
Busch-Jaeger	2247 U-500	230/50Hz																			
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	L																	
DINUY	RE EL1LE1	230/50Hz	400	LED																	
ELKO	400GLI	230/50Hz																			
ELKO	316GLE	230/50Hz	20-315	T																	
ELKO	600GLI	230/50Hz	40-600	U																	
ELKO	420GLEI	230/50Hz	40-420	U																	

Information about the OSRAM lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT CLASSIC P

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
 13 W 50/60 Hz 27 mA
 Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.










Liste der getesteten Dimmer

Legend					SUPERSTAR							
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					PAR16 35 36*	PAR16 50 36*	PAR16 60 36*	PAR16 80 120*				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability					EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code				
Not relevant					405283330133/AC01184	405283330171/AC01187	405283330210/AB41305	405807503668/AC03049				
Not tested					405283330157/AC01192	405283330199/AC01194	405283330232/AB41306	405807503632/AC03051				
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%
Altenburger Electronic	50 30	230V50Hz	15-350	T	2-20	98%-15%	2-20	97%-12%	2-20	98%-16%	2-20	98%-16%
AURORA	DSP 400	230V50Hz	400	L	1-10	98%-15%	2-10	97%-14%	1-4	96%-1%	1-4	96%-1%
Berker	2861	230V50Hz	50-420	U	1-20	98%-27%	1-20	98%-25%	1-20	97%-27%	1-20	97%-27%
Bicimo	LJNNT441N	230V50Hz			1-15	98%-1%	1-10	97%-5%	1-6	94%-7%	1-6	94%-7%
Bicimo	LJNNT4408	230V50Hz			2-20	98%-1%	2-9	98%-1%	1-6	97%-3%	1-6	97%-3%
Bicimo	NT4402N	230V50Hz	500	R	3-18	99%-19%	2-12	97%-19%	1-8	95%-22%	1-8	95%-22%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98%-15%	2-20	98%-17%	2-20	98%-21%	2-20	98%-21%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96%-22%	1-10	97%-26%				
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10		2-14	98%-16%	1-9	97%-15%	1-9	97%-15%
Busch-Jaeger	6526 U	230V50Hz			1-13	98%-34%	1-10	97%-35%	1-5		1-5	
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98%-1%	1-10	98%-5%	1-6	97%-9%	1-6	97%-9%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98%-1%	1-10	98%-1%	1-5	99%-7%	1-5	99%-7%
ELKO	400GLI	230V50Hz			1-10		1-13		1-4	97%-1%	1-4	97%-1%
ELKO	316GLE	230V50Hz	20-315	T	2-20	98%-6%	1-20	98%-7%	1-20	97%-10%	1-20	97%-10%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98%-1%	1-13	97%-1%	1-8	96%-1%	1-8	96%-1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98%-1%	1-13	97%-4%	1-10	97%-19%	1-10	97%-19%










Angaben zum OSRAM Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich










DIMMER COMPATIBILITY CLASSIC P

Legend					SUPERSTAR PLUS CL P 40 FIL/GL FR E27	SUPERSTAR PLUS CL P 40 FIL/GL FR E14	SUPERSTAR CL P 25 FIL/GL FR E27	SUPERSTAR CL P 25 FIL/GL FR E14	SUPERSTAR CL P 40 Frosted	SUPERSTAR CL P 40 FIL/GL FR E27 B22d	SUPERSTAR CL P 40 FIL/GL FR E14	SUPERSTAR PLUS CL P 40 FIL/GL FR E27	SUPERSTAR CL P 60 FIL/GL FR E14										
Good dimmability with indicated number of lamps (dimming range greater than 75%)																							
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																							
Undesired dimmability																							
Not relevant																							
Not tested					4058075603073 / AC45184 4058075603097 / AC45185 4058075603110 / AC45186 4058075603134 / AC45187	4058075603158 / AC45188 4058075603172 / AC45189 4058075603196 / AC45190 4058075603219 / AC45191	4058075436947 / AC32299 4058075436848 / AC32318	4058075436862 / AC32319 4058075436961 / AC32330	4058075430938 / AC45056	4058075436800 / AC32292 4058075436909 / AC32297 4058075437289 / AC32298 4058075434844 / AC32315	4058075434646 / AC32305 4058075434868 / AC32316 4058075437029 / AC32335 4058075436923 / AC32337	4058075603073 / AC45184 4058075603097 / AC45185 4058075603110 / AC45186 4058075603134 / AC45187	4058075447837 / AC45152 4058075434684 / AC45153 4058075447875 / AC45154										
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps			
Brand	Model	Voltage range	Power	Type																			
2001	63533	230/50Hz	29,08	T																			
2007	63533	230/50Hz	24,08	T																			
ABB	STD 50-3	230/50Hz	60-500	L	99-1%	98-3%	99-2%	98-3%	92-0%	94-0%	74-0%	97-0%	97-16%	99-7%	77-0%	97-0%	78-0%	100-0%	99-1%	98-3%	97-1%	91-2%	
Altenburger	50,3	230/50Hz								94-0%			64-2%	89-0%	95-0%	85-0%	97-0%	81-0%			97-0%	72-0%	
AURORA	DSP 400	230/50Hz	400	L	99-0%	98-0%	99-0%	99-0%		95-0%			98-0%		100-0%	74-0%	91-0%	60-0%	88-0%	99-0%	98-0%	85-0%	98-0%
Berker	2861	230/50Hz	50-420	U						95-0%	95-0%	86-0%	98-0%			97-0%	85-0%	98-0%	82-0%			97-1%	58-0%
Bticino	L/N/NT4411N	230/50Hz			92-0%	93-0%	92-0%	93-0%	94-0%	94-0%	97-0%		100-0%	100-0%					92-0%	93-0%	89-0%	92-0%	
Bticino	L/N/NT4408	230/50Hz							98-0%							87-0%	77-0%					85-0%	86-0%
bticino	NT4402N	230/50Hz	500	R				93-0%	100-0%	97-0%	80-0%	80-0%				95-0%		100-0%				95-0%	97-0%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	99-0%	99-0%	99-0%	99-0%	95-0%	95-0%	98-0%	98-0%	100-0%	100-0%	98-0%	99-0%	100-0%	100-0%	99-0%	99-0%	99-0%	100-0%	
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	91-0%	94-0%	91-0%	94-0%	89-0%	95-0%	92-0%	98-0%	100-0%	100-0%	97-0%	98-0%	98-0%	100-0%	91-0%	94-0%	85-0%	96-0%	
Busch-Jaeger	2250 U	230/50Hz	60-600	L		99-0%		99-0%							98-0%		22-0%			99-0%		98-0%	
Busch-Jaeger	6526 U	230/50Hz							78-0%	95-0%		100-0%			97-0%	79-0%	95-0%	95-0%					
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	99-0%	98-0%	99-0%	98-0%	74-0%	97-0%	77-0%	97-0%	100-0%	99-0%	82-0%	98-0%	84-0%	98-0%	99-0%	98-0%	96-0%	100-0%	
DimMax	420 SL	230/50Hz	200	L/T	98-0%	98-0%	99-0%	100-0%	85-0%	91-0%	100-0%	100-0%	100-0%	99-0%	92-0%	84-0%	89-0%	74-0%	98-0%	98-0%	97-0%	98-0%	
DINUY	RE EL1 LE1	230/50Hz	400	LED	98-4%	99-4%	98-4%	99-3%	80-0%	100-0%	100-0%	85-0%	100-0%	99-0%	85-0%	85-0%	85-0%	85-0%	98-4%	99-4%	96-3%	73-3%	
ELKO	400GLI	230/50Hz							90-0%	91-0%	92-0%	98-0%		95-0%	100-0%			100-0%				83-0%	97-0%
ELKO	315GLE	230/50Hz	20-315	T					98-0%	98-0%		95-0%	100-0%	98-0%	100-0%	92-0%	97-0%		99-0%			100-0%	100-0%
ELKO	600GLE/I	230/50Hz			97-0%	95-0%	97-0%	96-0%	92-0%	94-0%	94-0%	98-0%	100-0%	99-0%	100-0%	97-0%		100-0%	97-0%	95-0%	100-0%	89-0%	
ELKO	600GLI	230/50Hz	40-600	U	99-0%	97-0%	99-0%	99-0%		98-0%			100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	97-0%	66-0%	95-0%	
ELKO	420GLE/I	230/50Hz	40-420	U	93-0%		94-0%	96-0%	78-0%	95-0%	80-0%	97-0%	80-0%	100-0%	89-0%	98-0%	88-0%	100-0%	93-0%		96-0%	90-0%	
ELKO	1000LRI	230/50Hz			99-0%	99-0%	100-0%	98-0%	95-0%	97-0%	100-0%	98-0%	98-0%		96-0%	91-0%		88-0%	99-0%	99-0%	96-0%	96-0%	
ELKO	630GLE	230/50Hz	20-630	U	98-0%	75-0%	99-0%	77-0%	85-0%	92-0%			100-0%	98-1%	95-0%	92-0%	97-0%	88-0%	98-0%	75-0%	98-0%	57-0%	
Eltako	EUD61NPN-UC	230/50Hz	5-400	R / L / C	99-0%	99-0%	98-0%	99-0%	94-0%	100-0%	100-0%	100-0%	100-0%	100-0%	85-0%	85-0%	85-0%	85-0%	99-0%	99-0%	97-0%	96-0%	
Feller	40200.LEDxxx	230/50Hz			99-0%		99-0%		100-0%	94-0%	80-0%	98-0%	100-0%	80-0%	98-0%	96-0%	98-0%	99-0%	99-0%		99-0%		
Feller	40600.RLC	230/50Hz	20-600	U	97-0%	95-0%	97-0%	96-0%	92-0%	94-0%	94-0%	98-0%	100-0%	99-0%		98-0%		100-0%	97-0%	95-0%	100-0%	89-0%	
Feller	40600.RC	230/50Hz			98-0%	75-0%	99-0%	77-0%	85-0%	92-0%			100-0%	98-1%	95-0%	92-0%	97-0%	88-0%	98-0%	75-0%	98-0%	57-0%	
Feller	40600.RL	230/50Hz			99-0%	97-0%	99-0%	99-0%		98-0%			100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	97-0%	66-0%	95-0%	
Feller	40420.RLC	230/50Hz			93-0%		94-0%	96-0%	78-0%	95-0%	80-0%	97-0%	80-0%	100-0%	89-0%	98-0%	88-0%	100-0%	93-0%		96-0%	90-0%	
Feller	31000	230/50Hz			99-0%	99-0%	100-0%	98-0%	95-0%	97-0%	100-0%	98-0%	98-0%		96-0%	91-0%		88-0%	99-0%	99-0%	96-0%	96-0%	
Gira	226200	230/50Hz			95-0%	99-0%	96-0%	98-0%		95-0%			97-0%	100-0%	100-0%	85-0%	97-0%	80-0%	100-0%	95-0%	99-0%	90-0%	98-0%
Gira	030700	230/50Hz	20-525	T	98-0%	99-0%	99-0%	99-0%	95-0%	94-0%	98-0%	98-0%	100-0%	100-0%	98-0%	96-0%	100-0%	100-0%	98-0%	99-0%	99-0%	99-0%	
Gira	117600	230/50Hz	50-420	U					99-0%	98-0%	98-0%	95-0%	100-0%	98-0%	100-0%	97-0%	100-0%	99-0%				100-0%	
Gira	238500	230/50Hz					98-0%	90-0%	95-0%	97-0%	98-0%	100-0%		96-0%	99-0%	99-0%	100-0%	100-0%			100-0%	95-0%	
Gira	217400	230/50Hz	4X20-250	KNX-U	99-30%	99-22%	98-30%	99-22%		100-0%		100-0%			81-0%	83-0%	81-0%	83-0%	99-30%	99-22%	98-26%	97-34%	

DIMMER COMPATIBILITY CLASSIC P

Legend					SUPERSTAR PLUS CL P 40 FIL/GL FR E27	SUPERSTAR PLUS CL P 40 FIL/GL FR E14	SUPERSTAR CL P 25 FIL/GL FR E27	SUPERSTAR CL P 25 FIL/GL FR E14	SUPERSTAR CL P 40 Frosted	SUPERSTAR CL P 40 FIL/GL FR E27 B22d	SUPERSTAR CL P 40 FIL/GL FR E14	SUPERSTAR PLUS CL P 40 FIL/GL FR E27	SUPERSTAR CL P 60 FIL/GL FR E14											
Good dimmability with indicated number of lamps (dimming range greater than 75%)																								
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																								
Undesired dimmability																								
Not relevant																								
Not tested					4058075603073 / AC45184 4058075603097 / AC45185 4058075603110 / AC45186 4058075603134 / AC45187	4058075603158 / AC45188 4058075603172 / AC45189 4058075603196 / AC45190 4058075603219 / AC45191	4058075436947 / AC32299 4058075436848 / AC32318	4058075436862 / AC32319 4058075436961 / AC32330	4058075430938 / AC45056	4058075436800 / AC32292 4058075436909 / AC32297 4058075437289 / AC32298 4058075434844 / AC32315	4058075434646 / AC32305 4058075434868 / AC32316 4058075437029 / AC32335 4058075436923 / AC32337	4058075603073 / AC45184 4058075603097 / AC45185 4058075603110 / AC45186 4058075603134 / AC45187	4058075447837 / AC45152 4058075434684 / AC45153 4058075447875 / AC45154											
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps				
Brand	Model	Voltage range	Power	Type																				
Hager	WUD87	230/50Hz	400	LED-U	92-0%	84-0%	92-0%	84-0%	92-0%	89-0%			100-0%	100-0%	77-0%	82-0%	82-0%	100-0%	92-0%	84-0%	97-0%	66-0%		
Hamilton	KP1X40	230/50Hz	400						89-0%	95-0%	80-0%			97-4%	74-0%	96-0%	75-0%	100-0%				97-8%		
Hugo Müller	paladin 872110 led	230/50Hz			98-4%	99-4%	98-4%	99-3%	80-0%	100-0%	100-0%	85-0%	100-0%	99-0%			85-0%	85-0%	98-4%	99-4%	96-3%	73-3%		
Jung	225 NVDE	230/50Hz	20-500	L	95-0%	99-0%	96-0%	98-0%		95-0%		97-0%	100-0%	100-0%	85-0%	97-0%	80-0%	100-0%	95-0%	99-0%	90-0%	98-0%		
Jung	225 TDE	230/50Hz			98-0%	99-0%	99-0%	99-0%	95-0%	94-0%	98-0%	98-0%	100-0%	100-0%	98-0%	96-0%	100-0%	100-0%	98-0%	99-0%	99-0%	99-0%		
Jung	254 UDIE1	230/50Hz					99-0%	98-0%	98-0%	95-0%	100-0%	98-0%	97-0%	96-0%	100-0%	97-0%	100-0%	99-0%			100-0%			
Jung	1224 LEDUDE	230/50Hz		LED			98-0%	90-0%	95-0%	97-0%	98-0%	100-0%		96-0%	99-0%	99-0%	100-0%	100-0%			100-0%	95-0%		
Jung	3904 REGHE	230/50Hz			99-30%	99-22%	98-30%	99-22%		100-0%		100-0%					81-0%	83-0%	99-30%	99-22%	98-26%	97-34%		
Legrand	665114	230/50Hz	400	U	92-0%	93-0%	92-0%	93-0%	94-0%	94-0%	97-0%		100-0%	100-0%					92-0%	93-0%	89-0%	92-0%		
Legrand	574319/574339	230/50Hz	400	U	92-0%	93-0%	92-0%	93-0%	94-0%	94-0%	97-0%		100-0%	100-0%					92-0%	93-0%	89-0%	92-0%		
Legrand	572239/572739	230/50Hz	400	U	92-0%	93-0%	92-0%	93-0%	94-0%	94-0%	97-0%		100-0%	100-0%					92-0%	93-0%	89-0%	92-0%		
Legrand	078407/079207	230/50Hz	400	U	92-0%	93-0%	92-0%	93-0%	94-0%	94-0%	97-0%		100-0%	100-0%					92-0%	93-0%	89-0%	92-0%		
Legrand	048869/048871	230/50Hz	400	U	92-0%	93-0%	92-0%	93-0%	94-0%	94-0%	97-0%		100-0%	100-0%					92-0%	93-0%	89-0%	92-0%		
Legrand	067083/048869	230/50Hz	400	U	92-0%	93-0%	92-0%	93-0%	94-0%	94-0%	97-0%		100-0%	100-0%					92-0%	93-0%	89-0%	92-0%		
Legrand	770061	230/50Hz	400	RL					97-0%	98-0%	100-0%	100-0%			82-0%		81-0%	83-2%						
Legrand	099314	230/50Hz	300	RL					94-0%	95-0%			89-0%		74-0%	85-0%		82-0%			99-0%	98-0%		
Legrand	770062	230/50Hz	400	RLC	100-0%	97-0%	100-0%	97-0%		94-0%			97-0%	99-0%	99-0%		100-0%	65-0%	100-0%	100-0%	97-0%	100-0%		
Legrand	078405	230/50Hz	600	RL					98-0%						75-0%	87-0%	77-0%			85-0%	86-0%	86-0%		
MASTER	DM-DGL	230/50Hz	1000	U / LED	98-41%	98-46%	98-41%	98-47%	97-0%	97-0%	97-2%	100-0%			77-0%	85-0%	77-0%	85-0%	98-41%	98-46%	96-39%	97-8%		
MASTER	DM-2500	230/50Hz	2500	U / LED	98-0%	99-0%	98-0%	99-0%	89-0%	98-0%	74-0%	97-0%	98-0%	100-0%	74-0%	83-0%		95-0%	98-0%	99-0%	95-0%	97-0%		
Merten	MEG5136-0000	230/50Hz					98-0%	98-0%		95-0%	100-0%	98-0%	100-0%	100-0%		97-0%					100-0%	100-0%		
Merten	MEG5134-0000	230/50Hz			99-0%		99-0%		100-0%	94-0%	80-0%	98-0%	100-0%	80-0%	98-0%	96-0%	98-0%	99-0%	99-0%		99-0%			
Merten	MEG5139-0000	230/50Hz			97-0%	95-0%	97-0%	96-0%	92-0%	94-0%	94-0%	98-0%	100-0%	99-0%	98-0%		100-0%	97-0%	95-0%	100-0%	89-0%			
Merten	MEG5137-0000	230/50Hz			98-0%	75-0%	99-0%	77-0%	85-0%	92-0%			100-0%	98-1%	95-0%	92-0%	97-0%	88-0%	98-0%	75-0%	98-0%	57-0%		
Merten	MEG5133-0000	230/50Hz			99-0%	97-0%	99-0%	99-0%		98-0%			100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	97-0%	66-0%	95-0%		
Merten	MEG5138-0000	230/50Hz			93-0%		94-0%	96-0%	78-0%	95-0%	80-0%	97-0%	80-0%	100-0%	89-0%	98-0%	88-0%	100-0%	93-0%		96-0%	90-0%		
Merten	MEG 5170-0300	230/50Hz	10-200	U			77-0%		98-0%	92-0%	83-0%	89-0%			65-0%	85-0%	88-0%	88-0%			97-0%	73-0%		
Merten	MEG 5131	230/50Hz	40-400	L	99-0%	95-0%	99-0%	96-0%	94-0%	100-0%	93-0%	100-0%	100-0%	100-0%	63-0%	83-0%	64-0%	81-0%	99-0%	95-0%		91-0%		
Merten	MEG 5132	230/50Hz			99-0%	95-0%	99-0%	96-0%	94-0%	100-0%	93-0%	100-0%	100-0%	100-0%	63-0%	83-0%	64-0%	81-0%	99-0%	95-0%		91-0%		
Merten	MEG 5140	230/50Hz	9-100	L	95-0%	99-0%	95-0%	97-0%	95-0%	98-0%		98-0%	100-0%	100-0%	58-0%	82-0%	58-0%	82-0%	95-0%	99-0%	96-0%	96-0%		
Merten	MEG 5135	230/50Hz	60-1000	L	99-0%	99-0%	100-0%	98-0%	95-0%	97-0%	100-0%	98-0%	98-0%		96-0%	91-0%		88-0%	99-0%	99-0%	96-0%	96-0%		
MK	K4501	230/50Hz	180	L	100-0%	100-0%	98-0%	100-0%	85-0%	95-0%	74-0%	97-0%	96-0%	96-0%		99-0%		100-0%	100-0%	100-0%	99-0%	99-0%		
NEXUS	881P-01	230/50Hz	400	L	99-0%	99-0%	99-0%	99-0%	91-0%		74-0%	97-0%	100-0%	99-0%	69-0%	98-0%		100-0%	99-0%	99-0%	94-0%	98-0%		
NIKO	310-01900	230/50Hz	5-200	U	98-0%	98-0%	99-0%	98-0%	80-0%	92-0%	85-0%	95-0%	98-0%	98-0%	85-0%	85-0%	68-0%	74-0%	98-0%	98-0%	80-0%	78-0%		
NIKO	330-00700	230/50Hz	5-200	U	98-1%	98-4%	98-0%	100-6%	100-0%	95-0%	71-0%	89-0%	100-0%	100-0%	65-0%	85-0%	52-0%		98-1%	98-4%	97-5%	73-5%		

DIMMER COMPATIBILITY CLASSIC P

Legend					SUPERSTAR PLUS CL P 40 40 FIL/GL FR E27	SUPERSTAR PLUS CL P 40 40 FIL/GL FR E14	SUPERSTAR CL P 25 FIL/GL FR E27	SUPERSTAR CL P 25 FIL/GL FR E14	SUPERSTAR CL P 40 Frosted	SUPERSTAR CL P 40 FIL/GL FR E27 B22d	SUPERSTAR CL P 40 FIL/GL FR E14	SUPERSTAR PLUS CL P 40 FIL/GL FR E27	SUPERSTAR CL P 60 FIL/GL FR E14													
Good dimmability with indicated number of lamps (dimming range greater than 75%)																										
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																										
Undesired dimmability																										
Not relevant																										
Not tested					4058075603073 / AC45184 4058075603097 / AC45185 4058075603110 / AC45186 4058075603134 / AC45187	4058075603158 / AC45188 4058075603172 / AC45189 4058075603196 / AC45190 4058075603219 / AC45191	4058075436947 / AC32299 4058075436848 / AC32318	4058075436862 / AC32319 4058075436961 / AC32330	4058075430938 / AC45056	4058075436800 / AC32292 4058075436909 / AC32297 4058075437289 / AC32298 4058075434844 / AC32315	4058075434646 / AC32305 4058075434868 / AC32316 4058075437029 / AC32335 4058075436923 / AC32337	4058075603073 / AC45184 4058075603097 / AC45185 4058075603110 / AC45186 4058075603134 / AC45187	4058075447837 / AC45152 4058075434684 / AC45153 4058075447875 / AC45154													
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps				
Brand	Model	Voltage range	Power	Type																						
Odace	S520512	230/50Hz			99-0%		99-0%		100-0%	94-0%	80-0%	98-0%	100-0%	80-0%	98-0%	98-0%	96-0%	98-0%	99-0%	99-0%	99-0%	99-0%	99-0%			
Odace	S520511	230/50Hz			99-0%	97-0%	99-0%	99-0%	98-0%		100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	97-0%	99-0%	99-0%	99-0%	99-0%	95-0%			
Odace	S520515	230/50Hz			93-0%		94-0%	96-0%	78-0%	95-0%	80-0%	97-0%	80-0%	100-0%	89-0%	98-0%	88-0%	100-0%	93-0%	99-0%	99-0%	96-0%	90-0%			
Odace	S520518	230/50Hz			95-0%	99-0%	95-0%	97-0%	95-0%	98-0%	98-0%	98-0%	100-0%	100-0%	58-0%	82-0%	58-0%	82-0%	95-0%	99-0%	99-0%	96-0%	96-0%			
Osram	HTi DALI 315 DIM	230/50Hz	20-315	DALI-T	98-0%	98-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	98-0%	98-0%	100-0%	100-0%	99-0%			
PEHA	435 HAN	230/50Hz	60-600	L	96-0%	98-0%	97-0%	98-0%	91-0%	92-0%		95-0%	100-0%	100-0%		81-0%		81-0%	96-0%	98-0%		60-0%	96-0%			
Schneider	400GLI	230/50Hz	40-400	T			90-0%	91-0%	92-0%	98-0%		95-0%	100-0%	100-0%		100-0%		100-0%				83-0%	97-0%			
Schneider	SBD315RC	230/50Hz					98-0%	98-0%		95-0%	100-0%	98-0%	100-0%	100-0%		97-0%		99-0%				100-0%	100-0%			
Schneider	SBD200LED	230/50Hz	400		99-0%		99-0%		100-0%	94-0%	80-0%	98-0%	100-0%	80-0%	98-0%	96-0%	98-0%	99-0%	99-0%	99-0%		99-0%	99-0%			
Schneider	SBD600RCL	230/50Hz			97-0%	95-0%	97-0%	96-0%	92-0%	94-0%	94-0%	98-0%	100-0%	99-0%		98-0%		100-0%	97-0%	95-0%	100-0%	89-0%				
Schneider	SBD630RC	230/50Hz			98-0%	75-0%	99-0%	77-0%	85-0%	92-0%			100-0%	98-1%	95-0%	92-0%	97-0%	88-0%	98-0%	75-0%	98-0%	57-0%				
Schneider	SBD600RL	230/50Hz			99-0%	97-0%	99-0%	99-0%		98-0%			100-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	97-0%		66-0%	95-0%			
Schneider	SBD420RCRL	230/50Hz			93-0%		94-0%	96-0%	78-0%	95-0%	80-0%	97-0%	80-0%	100-0%	89-0%	98-0%	88-0%	100-0%	93-0%		96-0%	90-0%				
Schneider	5170	230/50Hz					77-0%		98-0%	92-0%	83-0%	89-0%			65-0%	85-0%	88-0%	88-0%				97-0%	73-0%			
Schneider	SBD400RL	230/50Hz			99-0%	95-0%	99-0%	96-0%	94-0%	100-0%	93-0%	100-0%	100-0%	100-0%	63-0%	83-0%	64-0%	81-0%	99-0%	95-0%		91-0%				
Schneider	SBD5PL	230/50Hz			95-0%	99-0%	95-0%	97-0%	95-0%	98-0%		98-0%	100-0%	100-0%	58-0%	82-0%	58-0%	82-0%	95-0%	99-0%	96-0%	96-0%	96-0%			
Schneider	ATTD1000RL	230/50Hz			99-0%	99-0%	100-0%	98-0%	95-0%	97-0%		100-0%	98-0%	98-0%	96-0%	91-0%	88-0%	99-0%	99-0%	99-0%	96-0%	96-0%				
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	99-0%	99-0%	99-0%	99-0%	98-0%	94-0%		97-0%	99-0%	100-0%	86-0%	92-0%		100-0%	99-0%	99-0%	95-0%	61-0%				
Siemens	5TC8 284	230/50Hz	20-525	T	83-3%	71-0%	82-2%	71-0%		95-0%		98-0%	100-0%	100-0%					83-3%	71-0%		78-2%	72-0%			
Siemens	5WG1-528-1AB31	230/50Hz	20-500	KNX-U			100-21%	97-24%	100-100%	100-0%	100-0%	0-0%			85-0%	85-0%	85-0%	85-0%			95-19%	100-2%				
theben	DIMAX 544 plus P	230/50Hz	250	T			61-0%	99-0%	97-0%	97-0%		97-0%	0-0%	94-0%	94-0%	93-0%	95-0%	93-0%			97-0%	100-0%				
theben	DIMAX 534 plus	230/50Hz	400	T	60-0%	98-0%	60-0%	98-0%	100-0%	100-0%	100-0%	97-0%			100-0%	100-0%	100-0%	100-0%	60-0%	98-0%	97-0%	100-0%				
VADSBO	LD 220	230/50Hz	1-200	U	99-0%	99-0%	98-0%	99-0%	97-0%	95-0%		98-0%			83-0%	89-0%		96-0%	99-0%	99-0%	95-0%	68-0%				
VARILIGHT	HQ3W	230/50Hz	400		100-1%	99-3%	100-2%	99-3%		94-0%	69-0%	89-0%	95-0%	100-0%	65-0%	91-0%	52-0%	92-0%	100-1%	99-3%	96-3%	97-3%				
VARILIGHT	JQP401W	230/50Hz	400	T			99-2%	91-4%	86-0%	97-0%		95-0%	97-23%	96-22%	97-0%	99-0%	99-0%	100-0%			100-2%	95-2%				
Vimar	20135	230/50Hz	3 - 100	U	99-0%	100-0%			98-0%	91-0%			100-0%	96-0%	96-0%	58-0%	74-0%		83-0%	99-0%	100-0%					
ZANO	WH401	230/50Hz	400	L			90-0%	98-20%	95-0%	92-0%	75-0%	80-0%	96-0%	94-0%		99-0%		100-0%				94-0%	90-12%			
ZANO	WH251	230/50Hz	250			89-0%	86-0%	89-0%	94-0%	89-0%	77-0%	94-0%		96-0%	85-0%	97-0%	74-0%	95-0%		89-0%		98-0%				
ZANO	Z GRID 700	230/50Hz	250	LED					92-0%	97-0%	100-0%	100-0%		100-0%	100-0%	98-0%	95-0%									
ZANO	Z GRID 600	230/50Hz	250	T	100-0%	99-0%	99-0%	99-0%											100-0%	99-0%	95-0%	97-0%				
ZANO	Z GRID 500	230/50Hz	500		99-0%	98-0%	99-0%	98-0%	75-0%	97-0%	95-0%	95-0%	100-0%	99-0%		98-0%		99-0%	98-0%	94-0%	95-0%					

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. OSRAM does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. OSRAM übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com