

LEDVANCE.COM

LEDVANCE

100 000 h
LIFETIME


Up to
180
lm/W
EFFICIENCY



TRUSYS UNIVERSAL

THE LED SOLUTION FOR YOUR
TRUNKING SYSTEM REFURBISHMENT

Up to -70 % energy savings
compared to traditional lighting

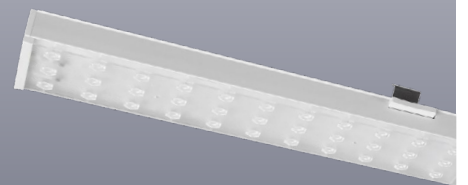


SMALL EFFORT, BIG IMPACT

UPGRADING TO LED WITH TRUSYS UNIVERSAL

PERFORMANCE CLASS

UP TO
-70%
ENERGY
USE¹

Switching to future-oriented LED technology takes no great effort. Thanks to TRUSYS UNIVERSAL's clever click-into-place function it can be easily and quickly integrated into most existing trunking systems. The results are impressive. With its excellent efficiency of up to 180 lm/W TRUSYS UNIVERSAL helps save up to 70 % energy and therefore costs compared to fluorescent technology.

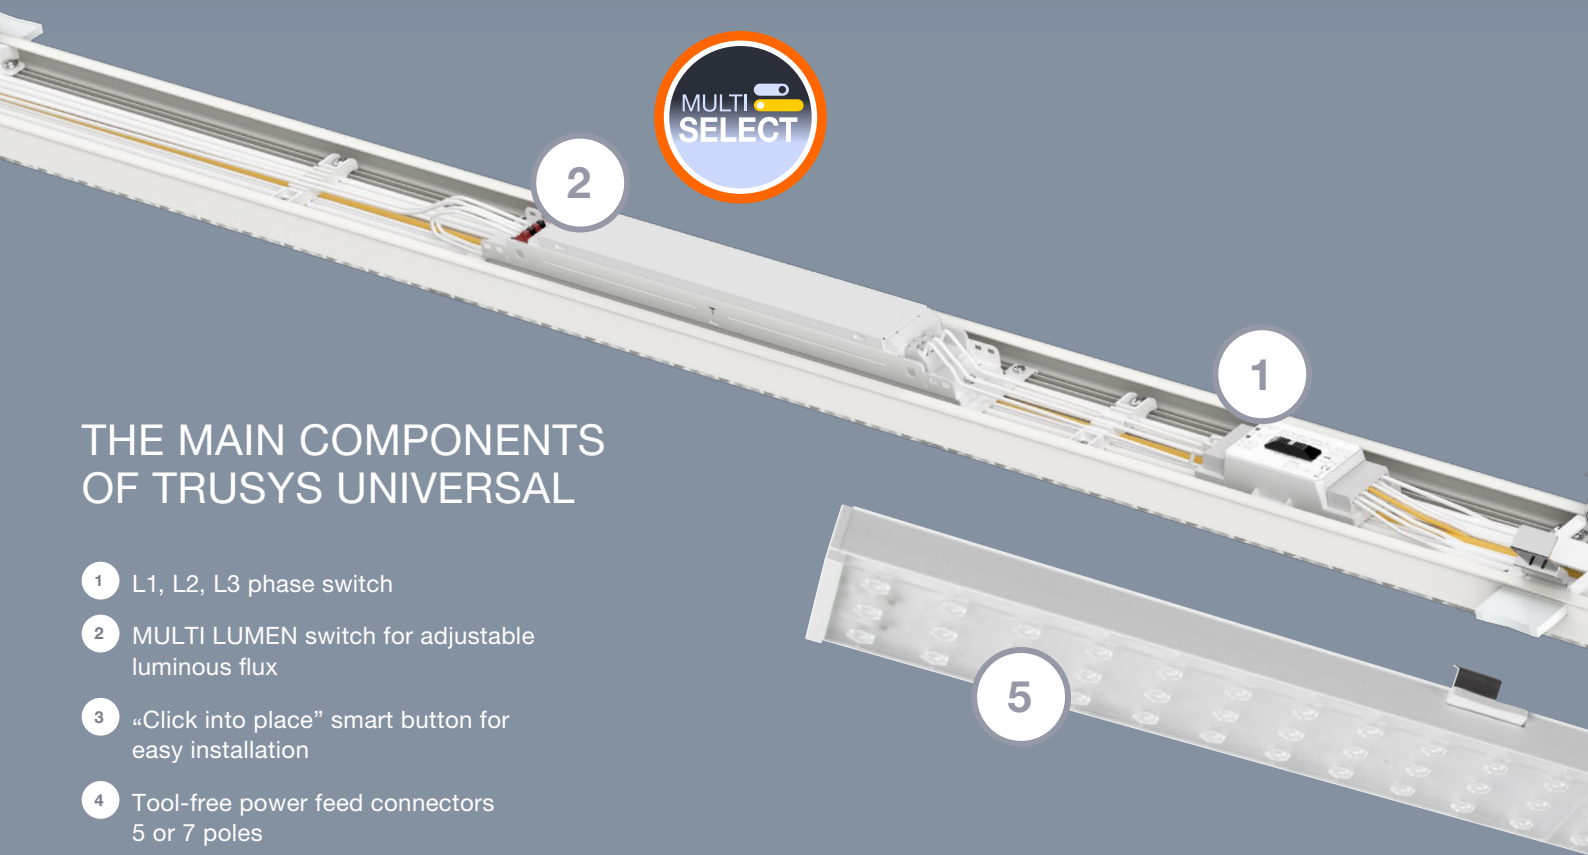

THE MAIN COMPONENTS OF TRUSYS UNIVERSAL


- 1 L1, L2, L3 phase switch
- 2 MULTI LUMEN switch for adjustable luminous flux
- 3 "Click into place" smart button for easy installation
- 4 Tool-free power feed connectors 5 or 7 poles
- 5 LED modules with different beam angles (90° wide, 60° narrow, 30° very narrow)

¹ Compared to traditional lighting 3 x 80W fluorescent tube


COMPATIBLE TRUNKING SYSTEMS*



01 TRILUX E-Line




02 FLUOLITE TRX



03 LUDWIG TR50W



09 RIDI VLG/VLT/SLG




10 PHILIPS Maxos



11 PHILIPS TTX400

* Compatibility should be checked before installation

- + LED RETROFIT SOLUTION for use in existing trunking lighting systems
- + QUICK AND EASY INSTALLATION through “click into place” smart buttons
- + HIGH FLEXIBILITY of application areas thanks to MULTI LUMEN, different beam angles and DALI-2 versions
- + MULTI LUMEN enables the individual adjustment of the required lumen package
- + CERTIFIED LUMINAIRE with its own through-wiring and 100,000 h service life
- + COMPATIBILITY GUARANTEED with standard mounting energy rails (details see overview below)
- + EMERGENCY LIGHTING OPERATION Both versions (DALI, On/Off) are suitable for central battery system

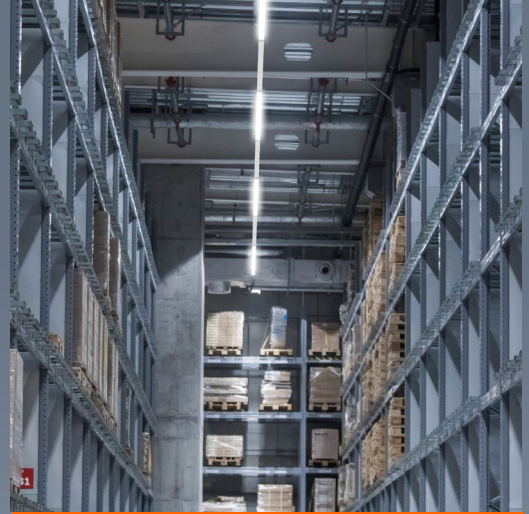


SEE FOR YOURSELF!



Just scan this QR code and check out:


ledvance.com/trusysuniversal-video

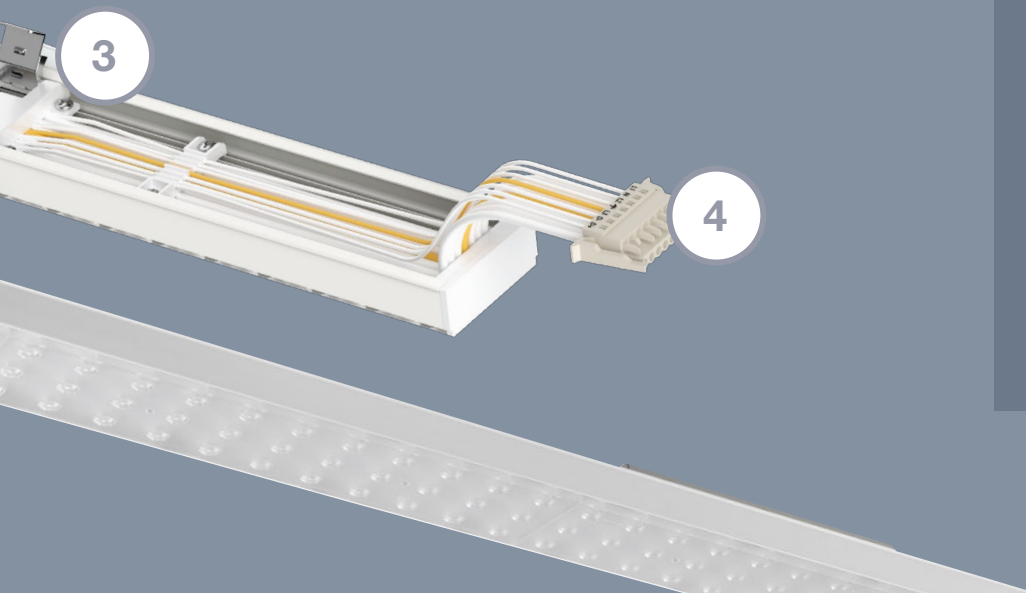

AVAILABLE ACCESSORIES










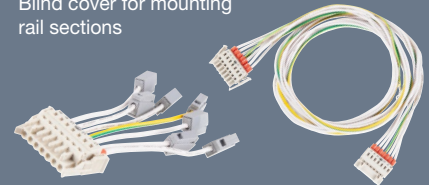

Blind cover for mounting rail sections



Feed-in connector 5/7 pole

Through-wiring cable, 5/7 pole

 <p>04 ZUMTOBEL TECTON 61 mm x 51 mm</p>	 <p>05 SITECO Modario 58 mm x 43 mm</p>	 <p>06 SITECO DUS 68 mm x 55 mm</p>	 <p>07 REGIOLUX SMT 68 mm x 55 mm</p>	 <p>08 REGIOLUX SDT/SPT 63,5 mm x 48 mm</p>
 <p>12 PHILIPS TTX200 40 mm x 41 mm</p>	 <p>13 VEKO PNR 60 mm x 46 mm</p>	 <p>14 ZUMTOBEL ZX1 61 mm x 40 mm</p>	 <p>15 ZUMTOBEL ZX2 61 mm x 40 mm</p>	

ABOUT LEDVANCE

With business activities in over 140 countries, LEDVANCE is one of the world's leading general lighting companies. Emerging from OSRAM's general lighting division, LEDVANCE's portfolio includes LED lamps and luminaires, intelligent lighting products, traditional lamps and renewable energy solutions.
#POWERTHROUGHLIGHT

LEDVANCE GmbH
Parkring 1-5
85748 Garching
Germany



LEDVANCE

TRUSYS UNIVERSAL

PERFORMANCE CLASS



Product name	EAN (GTIN)	Replacement for	W	lm	lm/W	K	L80 ¹	°	°	L x W x H [mm] Ø x H [mm]
TRUSYS UNIVERSAL – Universal fitting to existing trunking luminaire system										
TRUSYS UNIV P 73W 840 W CL PS	4099854 311628	3 x 80W FL	73/66/57/49/41	12400/11420/10030/8720/7380	170/173/176/178/180	4000	100000	90	—	1504 x 68 x 26
TRUSYS UNIV P 73W 840 N CL PS	4099854 311604	3 x 80W FL	73/66/57/49/41	12400/11420/10030/8720/7380	170/173/176/178/180	4000	100000	60	—	1504 x 68 x 26
TRUSYS UNIV P 73W 840 VN CL PS	4099854 311581	3 x 80W FL	73/66/57/49/41	12400/11420/10030/8720/7380	170/173/176/178/180	4000	100000	30	—	1504 x 68 x 26
TRUSYS UNIVERSAL DALI – Universal fitting to existing trunking luminaire system										
TRUSYS UNIV P 75W 840 W CL DALI	4099854 311710	3 x 80W FL	75	12750	170	4000	100000	90	DALI-2	1504 x 68 x 26
TRUSYS UNIV P 75W 840 N CL DALI	4099854 311697	3 x 80W FL	75	12750	170	4000	100000	60	DALI-2	1504 x 68 x 26
TRUSYS UNIV P 75W 840 VN CL DALI	4099854 311642	3 x 80W FL	75	12750	170	4000	100000	30	DALI-2	1504 x 68 x 26

TRUSYS UNIVERSAL ACCESSORIES

PERFORMANCE CLASS



Product name	EAN (GTIN)	L x W x H [mm] Ø x H [mm]	MATERIAL	COLOR	No.
TRUSYS UNIVERSAL Accessories					
TRUSYS UNIV FEED IN 5P	4099854 317347	156 x 42 x 15	Plastic	White	1
TRUSYS UNIV FEED IN 7P	4099854 317361	156 x 52 x 15	Plastic	White	2
TRUSYS UNIV BLIND COVER	4099854 317385	1504 x 64 x 25	Aluminum	White	3
TRUSYS UNIV 1500 5P WIRE	4099854 317408	1755 x 42 x 15	Plastic	White	4
TRUSYS UNIV 1500 7P WIRE	4099854 317583	1755 x 52 x 15	Plastic	White	5
TRUSYS UNIV 3000 5P WIRE	4099854 317606	3250 x 42 x 15	Plastic	White	4
TRUSYS UNIV 3000 7P WIRE	4099854 317620	3250 x 52 x 15	Plastic	White	5
TRUSYS UNIV SAFETY ROPE	4099854 317644	213 x 67 x 25	Stainless steel	White	6

¹ t[h]: L70/B50 @ 25°C (T_a)/t[h]: L80/B10 @ 25°C (T_a)

² Refer to www.ledvance.com/guarantee for precise conditions