




DOWNLIGHT INSTALLATION: VARIED INSTALLATION METHODS



RETROFIT
Can downlight



NEW CONSTRUCTION
Canless downlight



DIRECT WIRE
Junction Box

LED DOWNLIGHTS: NEW CONSTRUCTION CANLESS




	RT5A	LEDMD 3A	LEDMD: MICRO DISK SLIM	RT 6A	NIGHT RING MICRODISK
Wattage	4": 7/8/9W 7/9/12W 6": 7/9/11W 14/18/24W 10/18/23W 8": 12/16/22W 25/29/35W 20/28/34W 10": 32/37/43W	3": 6.5W 4": 10W 6": 10W 14W 8": 19W 12": 23W	3": 6.5W 4": 10W 6": 14W 8": 19W	4": 7/9.5/12.5W 6": 12/16/21W 11/16/21W 8": 12/18/25W 25/31/37W	4": 10W 6": 12W
Lumens	4": 500/600/700 600/800/1000 6": 500/700/900 1100/1500/2000 900/1600/2000 8": 1000/1500/2000 2400/2800/3300 1850/2500/3000 10": 3000/3500/4000	3": 500 4": 800 6": 800 1200 8": 1600 12": 2300	3": 500 4": 800 6": 1200 8": 1600	4": 500/700/950 500/700/900 6": 1100/1500/2000 8": 1000/1500/2000 2000/2500/3000	4": 830 6": 1000
LPW	UP TO 91 LPW	UP TO 87 LPW	UP TO 86 LPW	UP TO 95 LPW	UP TO 83 LPW
CRI	>90	>90	>90	>90	>90
CCT	2700/3000/3500/4000/5000K or Fixed CCT 2700K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Voltage	120-347V 120-277V	120V 120-277V	120-277V 120V	120-347V 120V	120V
Dimming	0-10V (120-277V) 0-10V (120-347V)	0-10V (120-277V) Triac (120V)	0-10V (120-277V) Triac (120V)	0-10V (120-347V) Triac (120V)	Triac (120V)
Installation	New Construction	New Construction	New Construction	New Construction	New Construction
Features	Dual selectable, white trim, ENERGY STAR® (options), T24, IC Rated (options), TAA, wet rated, EMBB (field installable). Bronze, black, satin trim available.	CCT selectable, white or black trim, FT6 listed cable, ENERGY STAR® (options), T24, IC rated, TAA, wet rated.	Flame resistant, CCT selectable, white trim, FT6 listed cable, ENERGY STAR® (options), T24, IC rated, TAA, UL263, wet rated.	Dual selectable, white trim with semi specular reflector, ENERGY STAR® (options), T24, IC rated (options), TAA, wet rated, EMBB (field installable).	Nightlight feature, CCT selectable, white trim, FT4 rated cable, ENERGY STAR®, T24, damp rated.

Accessories



Spec Sheets

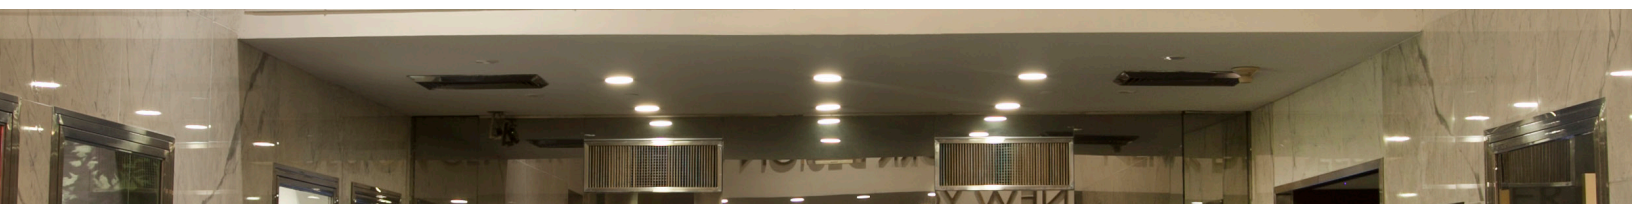

LED DOWNLIGHTS: NEW CONSTRUCTION CANLESS GIMBAL



	LEDRT (GIMBAL)	LEDRT (GIMBAL)
Wattage	3": 7W 4": 9W 6": 13W	3": 7W 4": 9W 6": 13W
Lumens	3": 500 4": 600 6": 950	3": 550 4": 650 6": 1000
LPW	UP TO 79 LPW	UP TO 79 LPW
CRI	>90	>90
CCT	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Voltage	120V	120V
Dimming	Triac (120V)	Triac (120V)
Installation	New Construction	New Construction
Features	45° Beam angle, 90° tilting lenses, black housing, FT1, T24, IC rated, wet rated.	45° Beam angle, 90° tilting lenses, white housing, FT1, T24, IC rated, wet rated.
Spec Sheets		



LED DOWNLIGHTS: RETROFIT CAN RECESSED



	LEDRT GIMBAL	RT A6 & A7	RT 1A	LEDRT 1AS	NIGHT RING
Wattage	4" Can: 8W 5/6" Can: 10W	4" Can: 7W 5/6" Can: 8W	4" Can: 7W 5/6" Can: 8W 10W 13W	4" Can: 5/6/7W 5/6" Can: 7.5/11/14W	4" Can: 8W 5/6" Can: 8W 12W
Lumens	4" Can: 700 5/6" Can: 725 900	4" Can: 600 5/6" Can: 700	4" Can: 650 5/6" Can: 725 900 1200	4" Can: 500/600/700 5/6" Can: 750/1050/1300	4" Can: 700 5/6" Can: 700 1000
LPW	UP TO 90 LPW	UP TO 88 LPW	UP TO 93 LPW	UP TO 100 LPW	UP TO 87.5 LPW
CRI	>90	>90	>90	>90	>90
CCT	2700/3000/3500/4000/5000K	2700K 3000K 4000K 5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Voltage	120V	120V	120V	120V	120V
Dimming	Triac (120V)	Triac (120V)	Triac (120V)	Triac (120V)	Triac (120V)
Installation	Retrofit	Retrofit	Retrofit	Retrofit	Retrofit
Features	Smooth reflector, 110° adjustable gimbal, white housing, ENERGY STAR®, T20, T24, wet rated.	Available in smooth and baffle reflector, white housing, ENERGY STAR®, T20, T24, wet rated.	Available in smooth and baffle reflector, white housing, ENERGY STAR®, T20, T24, wet rated.	Dual selectable, available in smooth and baffle reflector, white housing, ENERGY STAR®, T20, T24, wet rated.	Nightlight feature, CCT selectable, baffle reflector, white housing, ENERGY STAR®, T20, damp rated.

Accessories



Spec Sheets					
-------------	---	---	---	---	---





LED DOWNLIGHTS: RETROFIT UNIVERSAL MOUNT

ALL 3 MOUNTING TYPES



	LEDMD	LEDMD	LEDMD	LEDMD2A
Wattage	4": 10W 6": 14W	4": 10W 6": 12W 8": 18W	5": 9W 7": 12W 9": 17W 12": 21W	15W 16W
Lumens	4": 800 6": 1200	4": 550 6": 800 8": 1200	5": 650 7": 850 9": 1200 12": 1500	15W: 900 16W: 1200
LPW	UP TO 85 LPW	UP TO 71 LPW	UP TO 71 LPW	UP TO 75 LPW
CRI	>90	>90	>90	>90
CCT	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K or Fixed CCT 3000K
Voltage	120V	120V	120V	120V
Dimming	Triac (120V)	Triac (120V)	Triac (120V)	Triac (120V)
Installation	Retrofit or New Construction	Retrofit, New Construction, Direct Wire	Retrofit or Direct Wire	Retrofit or Direct Wire
Features	TruWave®, dual installation, white trim, ENERGY STAR®, T24, IC rated, wet rated.	TruWave®, universal installation, white trim, T24, IC rated, wet rated.	CCT selectable, dual installation, white trim, T24, wet rated.	CCT selectable, dual installation, white trim, T24, wet rated.
Spec Sheets				

With offices in more than 50 countries and business activities in more than 140 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and end consumers. In North America, LEDVANCE LLC offers a wide range of SYLVANIA LED luminaires for various applications, intelligent lighting products for Smart Homes and Buildings, one of the largest LED lamps portfolios in the industry, and traditional light sources. Further information can be found at www.ledvanceUS.com.



LEDVANCE LLC
181 Ballardvale Street, Suite 203
Wilmington, MA 01887 USA
Phone: 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

LEDVANCE and SYLVANIA are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA