



LEDVANCE

Robust wall and ceiling lights
with high light output

70000h
LIFETIME

UP TO
138
lm/W
EFFICIENCY



THE NEW BULKHEAD ROUND

THE ALL-ROUND SOLUTION
FOR INDOORS AND OUTDOORS



THE NEW BULKHEAD ROUND



3

2

**MORE VERSATILE, STRONGER,
MORE SUSTAINABLE:**

**THE NEW GENERATION OF LUMINAIRES IMPRESSES
WITH HIGH FUNCTIONALITY AND EFFICIENCY**

The BULKHEAD ROUND is a high-performance LED luminaire engineered for durability and versatility. Available in both on/off and sensor versions, it features selectable colour temperatures and lumen outputs, making it adaptable to various indoor and outdoor applications. Backed by a 5-year guarantee, this luminaire incorporates the EVERLOOP concept with replaceable drivers and light sources, facilitating easy maintenance and upgrade and thereby extending the product's lifecycle.

-
- + HIGHLY VERSATILE DUE TO MULTI SELECT:** adjustable colour temperature (3000 K /4000 K) and lumen levels up to 2000 lm (4 steps)

 - + SUSTAINABLE** through the EVERLOOP concept with replaceable components (serviceable)

 - + IMPROVED PERFORMANCE** with up to 138 lm/W efficiency and lifetime of up to 70000 h (L70)

 - + ROBUST INDOOR AND OUTDOOR LUMINAIRE** with IK10 impact resistance and IP65 protection

 - + ADDITIONAL ENERGY SAVINGS** thanks to high frequency (HF)-motion- and daylight-sensor versions

BREAKDOWN OF THE MAIN BULKHEAD ROUND COMPONENTS

- 1 Anti theft screw
- 2 Modern clean design
- 3 Slim elegant trim ring for decoration (included)
- 4 UV-proof PC diffuser cover with IK10 for outdoor use
- 5 Accessory: Eyelid available separately



WOULD YOU LIKE MORE INFORMATION?


Visit our website to discover more technical details on the product range.
ledvance.com/bulkhead-round



Does your project require something not shown? LEDVANCE Project Services can create lighting solutions to fit your specific needs. Get in touch: contact@ledvance.com

HUGE ASSORTMENT

BULKHEAD ROUND is available with a diameter of 250 mm or 300 mm in both black and white. Both colours and sizes are available as on/off or sensor versions. If required, the eyelid covers, which are available separately for all BULKHEAD ROUNDS, provide even more glare control. Drivers and light sources can be easily replaced if required.

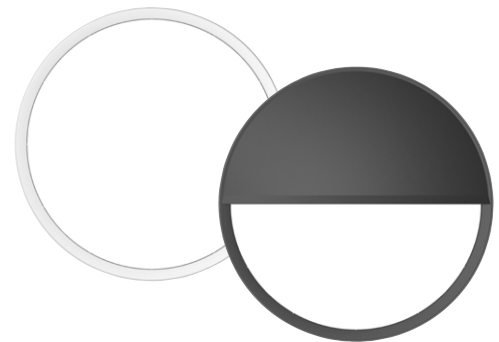

ENHANCED VERSATILITY: MULTI COLOUR AND MULTI LUMEN

With our new MULTI COLOUR and MULTI LUMEN features, installers can set the colour temperature in 3000 K or 4000 K as well as the lumen output in 4 steps (1200–2000 lm) before installation according to the application need. This reduces the complexity of product selection, as fewer products now cover a wider range of colour temperatures and lumens, meeting the needs of a variety of installations. The simple settings are done via a dip switch on the luminaire.



ADVANTAGES:

- Simplified product selection
- Flexible adjustment before installation
- Easy operation
- Proven quality

With our new **BULKHEAD ROUND** portfolio, we offer a practical and efficient solution for illuminating your projects.

INSTALLED IN A FLASH, EASILY CONFIGURED

THANKS TO SOPHISTICATED FEATURES, THIS LUMINAIRE IS UP AND RUNNING IN NO TIME

Finally, a truly flexible and efficient lighting solution for indoor and outdoor public areas: The double cable feed-throughs, the integrated mounting pattern and the pre-assembled plug connector enable quick and uncomplicated installation. Whether in corridors, stairwells or subways – BULKHEAD ROUND integrates perfectly into any environment thanks to its adjustable light colour and brightness. An optional integrated sensor version ensures maximum convenience and additional energy savings.

DOUBLE KNOCKOUTS:

Left and right each with double cable feed-throughs for flexible lateral wiring



FAST CONNECTOR:

Pre-assembled plug connector for simple and quick installation and wiring


SENSOR (OPTIONAL):

Easily adjustable HF motion and light sensor



MULTI COLOUR:

Flexible colour temperature selection between 3000 K and 4000 K via the DIP switch on the driver

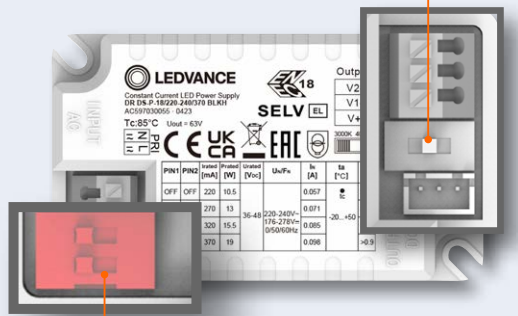

MULTI LUMEN:

Individual brightness adjustment in four levels on the driver, perfectly adjustable to the respective requirements on site

PATTERN FOR EASY INSTALLATION:

Quick and precise installation thanks to integrated mounting template. Suitable for numerous hole sizes and European standards (e.g. UK-BESA, Nordics)



HIGHLY SUSTAINABLE THE FUTURE IS CIRCULAR



**REPLACE,
DON'T WASTE**

EVERLOOP luminaires are designed so that their light sources and drivers can be easily replaced, which means the luminaires themselves can remain in use almost indefinitely.

With its innovative EVERLOOP luminaires, LEDVANCE is launching a new product line that encourages the transition from a linear to a circular lifecycle. Their USP is that any of the critical components can be easily upgraded. The luminaires and the overall installation can therefore always be kept functional and up-to-date – resulting in an almost unlimited life.

YOUR BENEFITS AT A GLANCE



LESS WASTE

The only components that get replaced are the ones that are either faulty or out of date. This reduces electronic waste – in line with future EU requirements. And the savings go on and on because the old components are recycled and materials used to manufacture new products.



LONG LIFE

Once installed, an EVERLOOP luminaire can be in use almost indefinitely. Not only is that a good example of sustainability, it also saves costs in the long term.



FUTURE-PROOF SOLUTION

Increasingly more tenders, projects and funding programs have reparability as one of their requirements. With EVERLOOP you are always on the safe side.



CONVENIENT UPGRADES

The LED light sources and drivers can be easily replaced so you can adapt EVERLOOP luminaires to changing conditions in an instant.



[ledvance.com/everloop](https://www.ledvance.com/everloop)

HOW EVERLOOP WORKS IN DETAIL



As an EVERLOOP luminaire, the BULKHEAD ROUND family offers easy disassembly and component exchange, with available upgrades and replacements. Future generations of light source and driver components will retain the same dimensions, allowing older luminaires to be upgraded with more efficient components.



Lightsources



Drivers


SMART SENSOR TECHNOLOGY FOR OPTIMAL LIGHT MANAGEMENT

The **BULKHEAD ROUND SENSOR** version with HF-motion and daylight sensor provides intelligent light management for cost-effective and sustainable lighting. By precisely configuring the detection area, hold time, and daylight threshold, you can optimise energy consumption while ensuring optimal lighting conditions in your application.

SENSOR CONFIGURATION



DETECTION AREA

As the HF signal penetrates walls, even movement outside the room can switch the light on. To avoid unnecessary activation and maximise energy efficiency, it is therefore important to configure the detection area correctly. Our luminaire has an extremely precise activation range, which is ideal for use in corridors, stairwells, corridors, stairwells, hallways and similar areas.

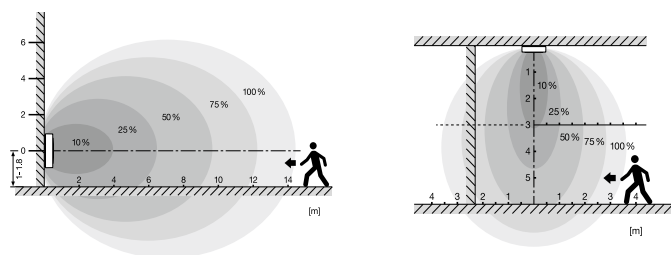

HOLD TIME

The hold time controls how long the light remains fully on after movement stops. A longer hold time offers greater convenience, while a shorter time saves energy.



DAYLIGHT SENSOR

The integrated daylight sensor provides intelligent light control based on ambient light levels. Activate the daylight function to make the luminaire only respond to movement when the light level falls below the set lux value. This significantly reduces energy consumption in areas with sufficient natural light.



DETECTION AREA			
1	2	3	
ON	ON	ON	100%
—	ON	ON	75%
ON	—	ON	50%
—	—	ON	25%
—	—	—	10%



HOLD TIME			
4	5	6	
ON	ON	ON	5 s
—	ON	ON	30 s
ON	—	ON	90 s
—	—	ON	3 min
ON	ON	—	20 min
—	—	—	30 min



DAYLIGHT SENSOR			
7	8	9	
ON	ON	ON	2 LUX
ON	ON	—	10 LUX
—	ON	—	25 LUX
ON	—	—	50 LUX
—	—	—	Disable

BULKHEAD ROUND/BULKHEAD ROUND SENSOR




Product name	EAN (GTIN)	Replacement for	W	lm	lm/W	K	L70 ¹	△	IK	L × W × H [mm] ∅ × H [mm]	Light No.
BULKHEAD ROUND – Robust wall and ceiling luminaire with IP65 and IK10 protection											
BLKH RD 250 P 9.5W CPS BK	4099854 286087	1 × 16W CFL-ni	9.5/8/6.5/5.5	1220/1070/860/710	128/132/129	3000/4000	70000	120	IK10	262 × 73	1
BLKH RD 250 P 9.5W CPS WT	4099854 286100	1 × 16W CFL-ni	9.5/8/6.5/5.5	1220/1070/860/710	128/132/129	3000/4000	70000	120	IK10	262 × 73	2
BLKH RD 300 P 17W CPS BK	4099854 286124	2 × 18W CFL-ni	17.5/15.5/13/11	2270/1990/1700/1400	132/136/138	3000/4000	70000	120	IK10	312 × 73	1
BLKH RD 300 P 17W CPS WT	4099854 286148	2 × 18W CFL-ni	17.5/15.5/13/11	2270/1990/1700/1400	132/136/138	3000/4000	70000	120	IK10	312 × 73	2
BULKHEAD ROUND SENSOR – Robust wall and ceiling luminaire with IP65 and IK10 protection and sensor											
BLKH RD SEN 250 P 10W CPS BK	4099854 286162	1 × 16W CFL-ni	10/8.5/7/6	1220/1070/860/710	122/120/118	3000/4000	70000	120	IK10	262 × 73	1
BLKH RD SEN 250 P 10W CPS WT	4099854 286186	1 × 16W CFL-ni	10/8.5/7/6	1220/1070/860/710	122/120/118	3000/4000	70000	120	IK10	262 × 73	2
BLKH RD SEN 300 P 18W CPS BK	4099854 286209	2 × 18W CFL-ni	17.5/15.5/13/11	2280/1980/1690/1390	128/127/130/126	3000/4000	70000	120	IK10	312 × 73	1
BLKH RD SEN 300 P 18W CPS WT	4099854 286247	2 × 18W CFL-ni	17.5/15.5/13/11	2280/1980/1690/1390	128/127/130/126	3000/4000	70000	120	IK10	312 × 73	2

SENSOR PROPERTIES

Product name	Type of sensor	Sensor technology	Detection threshold of daylight sensor	Detection range of motion sensor	Sensor detection angle	Sensor controlled switching time
BLKH RD SEN 250 P 10W CPS BK	Motion, Light	Microwave	2...50 lx	3...8 m	150°	5 s...30 min
BLKH RD SEN 250 P 10W CPS WT	Motion, Light	Microwave	2...50 lx	3...8 m	150°	5 s...30 min
BLKH RD SEN 300 P 18W CPS BK	Motion, Light	Microwave	2...50 lx	3...8 m	150°	5 s...30 min
BLKH RD SEN 300 P 18W CPS WT	Motion, Light	Microwave	2...50 lx	3...8 m	150°	5 s...30 min

BULKHEAD ROUND ACCESSORIES

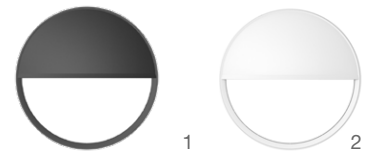

Product name	EAN (GTIN)	IK	L × W × H [mm] ∅ × H [mm]	MATERIAL	COLOR	Light No.
BULKHEAD ROUND EYELID – Attachable half-visor ring (IK10)						
BLKH RD Eyelid 250 BK	4099854 286759	IK10	262 × 74	Polycarbonate (PC)	Black	1
BLKH RD Eyelid 250 WT	4099854 286773	IK10	262 × 74	Polycarbonate (PC)	White	2
BLKH RD Eyelid 300 BK	4099854 286797	IK10	312 × 74	Polycarbonate (PC)	Black	1
BLKH RD Eyelid 300 WT	4099854 286810	IK10	312 × 74	Polycarbonate (PC)	White	2

¹ t[h]: L70/B50 @ 25 °C (T_a)/t[h]: L80/B10 @ 25 °C (T_a) | ² Refer to www.ledvance.com/guarantee for precise conditions

ABOUT LEDVANCE


With business activities in over 140 countries, LEDVANCE is one of the world's leading general lighting companies. Emerging from OSRAM's general lighting division, LEDVANCE's portfolio includes LED lamps and luminaires, intelligent lighting products, traditional lamps and renewable energy solutions.

#POWERTHROUGHLIGHT

LEDVANCE GmbH
 Parkring 1-5
 85748 Garching
 Germany

LEDVANCE

BULKHEAD ROUND COMPONENTS: DRIVER



Product name	EAN (GTIN)	W	L x W x H [mm] Ø x H [mm]
BULKHEAD ROUND DRIVER – Exchangeable driver			
DR DS-P- 10/220-240/350 BLKH	4099854 286834	10	79 x 45 x 25
DR DS-P- 18/220-240/370 BLKH	4099854 286858	19	79 x 45 x 25

BULKHEAD ROUND COMPONENTS: LIGHT SOURCE



Product name	EAN (GTIN)	W	lm	lm/W	K	L70 ¹	°	L x W x H [mm] Ø x H [mm]
BULKHEAD ROUND LIGHT SOURCES – Upgrade or replacement light source								
LISOEV 250R 8W 830 840 BLKH	4099854 311918	8	1220	152	3000/4000	70000	120	250 x 38
LISOEV 300R 15W 830 840 BLKH	4099854 311970	15	2270	151	3000/4000	70000	120	300 x 38

¹t[h]: L70/B50 @ 25 °C (T_a)/t[h]; L80/B10 @ 25 °C (T_a) | ² Refer to www.ledvance.com/guarantee for precise conditions