

LEDVANCE

LIGHT UP THE NIGHT!

OPTI-SELECT CYLINDER

PERFOR-
MANCE
CLASS

SIMPLIFYING YOUR WORK

- OPTI-SELECT: Narrow, Medium and Wide beam angles in the same product, adjustable via switch. No reflector swap needed!
- DUAL SELECTABLE: Three wattages and three CCTs in the same luminaire and on/off photocell.
- Choose between three sizes (3", 4" and 6") and three finishes: black, bronze and white.



OPTISELECT





LEDVANCE

ORDERING GUIDE

CYLIND	P	SXXX	UNH	D	8	SC2	RX	XX	P
PRODUCT NAME	SEGMENTATION CLASS	WATTAGE	VOLTAGE	DIMMING	CRI	COLOR TEMPERATURE	SIZE	COLOR/FINISH	PHOTOCELL
CYLIND = Cylinder luminaire	P = Performance Class	S010 = 5/8/10W S020 = 10/16/20W S030 = 15/25/30W	UNH = 120-347V	D = 0-10V Dimmable	8 = 80 CRI	SC2 = 3000/ 4000/5000K	R3 = Round 3" R4 = Round 4" R6 = Round 6"	BZ = Bronze BL = Black WH = White	P = Photocell

FEATURES

OPTISELECT


Beam angle adjustable (25, 40, 60°) via switch, no reflector swap needed.



It is easy to recognize LEDVANCE branded luminaires with Scale Design.

INTEGRATED PHOTOCELL

Can be disabled via On/Off switch.

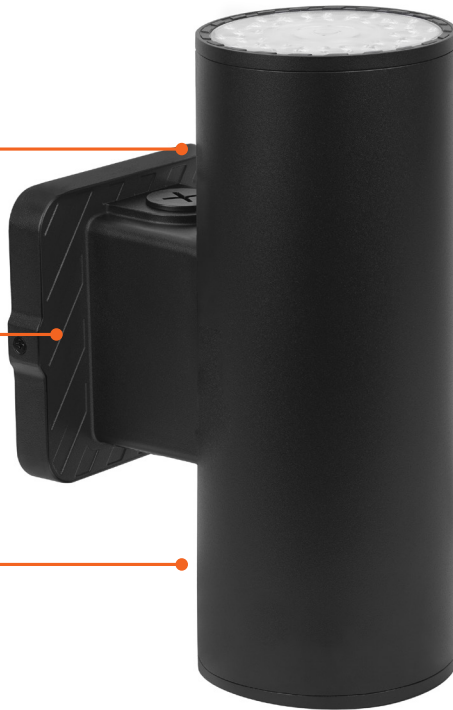

UP, DOWN OR UP + DOWN LIGHT MODES

100% downlight, 100% up light or 50/50% up/down.



WATTAGE/CCT SELECTABLE

Aids in inventory reduction & greater job site flexibility.

HOUSING

Three sizes: 3", 4" and 6" versions.
Three colors: bronze, black and white for application flexibility.

LEDVANCE LLC
181 Ballardvale Street, Suite 203
Wilmington, MA 01887 USA
Phone: 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

LEDVANCE is a registered trademark.
All other trademarks are those of their respective owners.
Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA



Spec Sheet



Install Guide