


DIMMER COMPATIBILITY VINTAGE 1906 EDISON

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

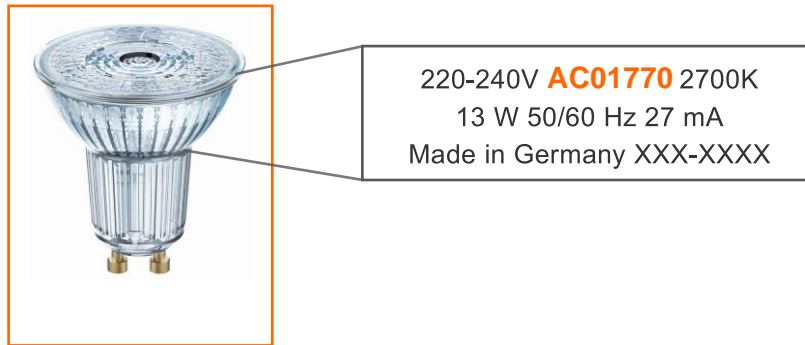

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36°				SUPERSTAR PAR16 50 36°				SUPERSTAR PAR16 80 36°				SUPERSTAR PAR16 80 120°															
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																																
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																																
Undesired dimmability																																
Not relevant																																
Not tested																																
EAN/Basic Code					4052839330153/AC01184				4052839330157/AC01152				4052839330174/AC01167				4052839330195/AC01134				4052839330232/AB41306				4058075036589/AC03043				4058075036582/AC03051			
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range													
ABB	STD 50-3	230/50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%												
Altenburger Electronic	50 30	230/50Hz	15-350	T	1-10	98% - 15%	2-10	97% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%												
ALPORA	DSP 400	230/50Hz	400	L	1-20	98% - 27%	1-20	98% - 26%	1-20	97% - 27%	1-20	97% - 27%	1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%												
Berker	2861	230/50Hz	50-420	U	2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%	2-20	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%												
Blicino	L/NNT441N	230/50Hz			2-20	99% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%	1-10	96% - 22%	1-10	97% - 26%	1-10	96% - 22%	1-10	97% - 26%												
Blicino	L/NNT4408	230/50Hz			1-10	98% - 1%	2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 34%	1-10	97% - 35%	1-5	97% - 15%	1-5	97% - 15%												
Blicino	NT4402N	230/50Hz	500	R	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%												
Busch-Jaeger	6513 U-102	230/50Hz	40-420	T	2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-11	98% - 1%	1-10	99% - 1%	1-5	99% - 7%	1-5	99% - 7%												
Busch-Jaeger	6523 U-102	230/50Hz	420	T	1-10	98% - 1%	1-10	99% - 1%	1-5	99% - 7%	1-5	99% - 7%	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%												
Busch-Jaeger	2250 U	230/50Hz	60-600	L	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%												
Busch-Jaeger	6526 U	230/50Hz			1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-20	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%												
Busch-Jaeger	2247 U-500	230/50Hz			1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%																				
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	L																												
DINUY	RE EL1LE1	230/50Hz	400	LED																												
ELKO	400GLI	230/50Hz																														
ELKO	315GLE	230/50Hz	20-315	T																												
ELKO	600GLI	230/50Hz	40-600	U																												
ELKO	420GLEI	230/50Hz	40-420	U																												

Information about the LEDVANCE lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER COMPATIBILITY VINTAGE 1906 EDISON

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
 13 W 50/60 Hz 27 mA
 Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.

Liste der getesteten Dimmer

Legend					SUPERSTAR							
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					PAR16 35 36*	PAR16 50 36*	PAR16 60 36*	PAR16 80 120*				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability					EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code				
Not relevant					405283330133/AC01184	405283330171/AC01187	405283330210/AB41305	405807503668/AC03049				
Not tested					405283330157/AC01192	405283330199/AC01194	405283330232/AB41306	405807503632/AC03051				
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
Altenburger Electronic	50 30	230V50Hz	15-350	T	2-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%
AURORA	DSP 400	230V50Hz	400	L	1-10	98% - 15%	2-10	97% - 14%	1-4	96% - 1%	1-4	96% - 1%
Berker	2861	230V50Hz	50-420	U	1-20	98% - 27%	1-20	98% - 25%	1-20	97% - 27%	1-20	97% - 27%
Bicimo	LJNNT441N	230V50Hz			1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%
Bicimo	LJNNT4408	230V50Hz			2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 3%	1-6	97% - 3%
Bicimo	NT4402N	230V50Hz	500	R	3-18	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96% - 22%	1-10	97% - 26%				
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10		2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%
Busch-Jaeger	6526 U	230V50Hz			1-13	98% - 34%	1-10	97% - 35%	1-5		1-5	
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%
ELKO	400GLI	230V50Hz			1-10		1-10		1-4	97% - 1%	1-4	97% - 1%
ELKO	316GLE	230V50Hz	20-316	T	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%

Angaben zum LEDVANCE Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich

DIMMER COMPATIBILITY VINTAGE 1906 GLOBE


Legend

- Great dimmability (total number of lamps dimming range greater than 75%)
- Dimmable (total number of lamps dimming range greater than 75%)
- Dimmed dimmability

	Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE		Vintage 1906 GLOBE	
Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer						
Brand	Model	Voltage	Power	Type	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
... (Detailed data rows follow, including models like 325 W/VE, 325 TDC, 350 LED, etc.)																																																						

... (Detailed data rows follow)

DIMMER COMPATIBILITY VINTAGE 1906 GLOBE

Legend	Vintage 1906 100W		Vintage 1906 150W		Vintage 1906 200W		Vintage 1906 250W		Vintage 1906 300W		Vintage 1906 350W		Vintage 1906 400W		Vintage 1906 450W		Vintage 1906 500W		Vintage 1906 600W		Vintage 1906 700W		Vintage 1906 800W		Vintage 1906 900W		Vintage 1906 1000W																																																																												
	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable	Dimmable	Non-Dimmable																																																																											
<p>Great dimmability (rated lumens output dimming range greater than 75%)</p> <p>Good dimmability (rated lumens output dimming range greater than 50%)</p> <p>Dimmed dimmability (rated lumens output dimming range greater than 25%)</p> <p>Non-dimmable</p>																																																																																																							
Brand Model Wattage Power Type	<table border="1"> <tr> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> </tr> <tr> <td>100W</td> <td>150W</td> <td>200W</td> <td>250W</td> <td>300W</td> <td>350W</td> <td>400W</td> <td>450W</td> <td>500W</td> <td>600W</td> <td>700W</td> <td>800W</td> <td>900W</td> <td>1000W</td> <td>100W</td> <td>150W</td> <td>200W</td> <td>250W</td> <td>300W</td> <td>350W</td> <td>400W</td> <td>450W</td> <td>500W</td> <td>600W</td> <td>700W</td> <td>800W</td> <td>900W</td> <td>1000W</td> <td>100W</td> <td>150W</td> <td>200W</td> <td>250W</td> <td>300W</td> <td>350W</td> <td>400W</td> <td>450W</td> <td>500W</td> </tr> </table>																												Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	100W	150W	200W	250W	300W	350W	400W	450W	500W	600W	700W	800W	900W	1000W	100W	150W	200W	250W	300W	350W	400W	450W	500W	600W	700W	800W	900W	1000W	100W	150W	200W	250W	300W	350W	400W	450W	500W								
Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand																																																																										
100W	150W	200W	250W	300W	350W	400W	450W	500W	600W	700W	800W	900W	1000W	100W	150W	200W	250W	300W	350W	400W	450W	500W	600W	700W	800W	900W	1000W	100W	150W	200W	250W	300W	350W	400W	450W	500W																																																																			
Legrand Model Wattage Power Type	<table border="1"> <tr> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> <td>Legrand</td> </tr> <tr> <td>100W</td> <td>150W</td> <td>200W</td> <td>250W</td> <td>300W</td> <td>350W</td> <td>400W</td> <td>450W</td> <td>500W</td> <td>600W</td> <td>700W</td> <td>800W</td> <td>900W</td> <td>1000W</td> <td>100W</td> <td>150W</td> <td>200W</td> <td>250W</td> <td>300W</td> <td>350W</td> <td>400W</td> <td>450W</td> <td>500W</td> <td>600W</td> <td>700W</td> <td>800W</td> <td>900W</td> <td>1000W</td> <td>100W</td> <td>150W</td> <td>200W</td> <td>250W</td> <td>300W</td> <td>350W</td> <td>400W</td> <td>450W</td> <td>500W</td> </tr> </table>																												Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	100W	150W	200W	250W	300W	350W	400W	450W	500W	600W	700W	800W	900W	1000W	100W	150W	200W	250W	300W	350W	400W	450W	500W	600W	700W	800W	900W	1000W	100W	150W	200W	250W	300W	350W	400W	450W	500W
Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand	Legrand																																																																		
100W	150W	200W	250W	300W	350W	400W	450W	500W	600W	700W	800W	900W	1000W	100W	150W	200W	250W	300W	350W	400W	450W	500W	600W	700W	800W	900W	1000W	100W	150W	200W	250W	300W	350W	400W	450W	500W																																																																			

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 1-5
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com