

# OSRAM

## Tri-Colour Linkable Batten



### AVAILABLE SIZES



OBL1F5WTC L313      OBL2F10WTC L573      OBL3F15WTC L813      OBL4F20WTC L1173      OBL5F23WTC L1440

### FEATURES AND BENEFITS

- Tri-color selectable: 3000K/4000K/6500K
- Flicker-Free technology ensures visual comfort
- Available in 5 sizes with length from 313mm to 1440mm
- Maximum combined wattages of all linkable battens connected in a single run can be up to 550 Watts.
- Cable connector / 1.2m Flex & Plug included for easy installation

FLICKER  
FREE

3000K  
4000K  
6500K


100  
lm/W

3Y  
WARRANTY

### AREAS OF APPLICATION

- Residential cabinets
- Commercial retails shelves
- Reception areas and foyers
- Corridors, stairways
- Entrances and hallways

### DIMENSIONS

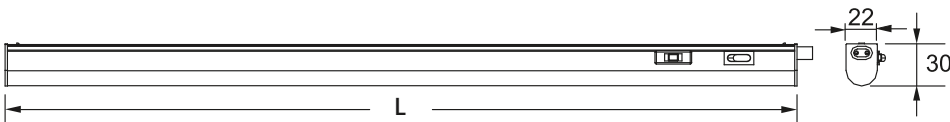

| Model      | L<br>(mm) |
|------------|-----------|
| OBL1F5WTC  | 313       |
| OBL2F10WTC | 573       |
| OBL3F15WTC | 813       |
| OBL4F20WTC | 1173      |
| OBL5F23WTC | 1440      |

SPECIFICATIONS

|                   |                 |                       |                  |
|-------------------|-----------------|-----------------------|------------------|
| lm/W              | 100lm/W         | PF                    | 0.9              |
| CCT               | 3000/4000/6500K | Frequency             | 50/60Hz          |
| CRI               | ≥80             | Connection Type       | 1.2m Flex & Plug |
| Flicker Rate      | Flicker Free    | Operating Temperature | -25°C~to +45°C   |
| Beam Angle        | 135°            | Lifetime              | 30,000 hours     |
| Installation Type | Surfce Mount    | Warranty              | 3 years          |
| Voltage           | 220 - 240V      |                       |                  |

ACCESSORIES

|                 |                  |
|-----------------|------------------|
| Cable Connector | 200mm            |
| Connection Type | 1.2m Flex & Plug |

ORDERING CODES

| Model number*<br>(Order Code) | EAN10 | Description | Input Inrush Current | Max Connection** | W | lm <sup>1</sup> | K | L<br>(mm) | h<br>(mm) |
|-------------------------------|-------|-------------|----------------------|------------------|---|-----------------|---|-----------|-----------|
|-------------------------------|-------|-------------|----------------------|------------------|---|-----------------|---|-----------|-----------|

TRI-COLOUR LINKABLE BATTEN

|            |               |                                                                                    |                |     |     |      |                      |      |    |
|------------|---------------|------------------------------------------------------------------------------------|----------------|-----|-----|------|----------------------|------|----|
| OBL1F5WTC  | 4099854706899 | Tri-Colour Linkable Batten 5W 500Lm FlickerFree L313xW22xH30mm 3K/4K/6.5K 1.2m F&P | 7A 120us@230V  | 110 | 5W  | 500  | 3000<br>4000<br>6500 | 313  | 30 |
| OBL2F10WTC | 4099854706936 | Tri-Colour Linkable Batten 10W 1000Lm FlickerFree L573xW22xH30mm 3K/4K/6.5K 1.2m   | 13A 170us@230V | 55  | 10W | 1000 | 3000<br>4000<br>6500 | 573  | 30 |
| OBL3F15WTC | 4099854706950 | Tri-Colour Linkable Batten 15W 1500Lm FlickerFree L813xW22xH30mm 3K/4K/6.5K 1.2m   | 16A 190us@230V | 36  | 15W | 1500 | 3000<br>4000<br>6500 | 813  | 30 |
| OBL4F20WTC | 4099854706974 | Tri-Colour Linkable Batten 20W 2000Lm FlickerFree L1173xW22xH30mm 3K/4K/6.5K       | 21A 230us@230V | 27  | 20W | 2000 | 3000<br>4000<br>6500 | 1173 | 30 |
| OBL5F23WTC | 4099854706998 | Tri-Colour Linkable Batten 23W 2300Lm FlickerFree L1440xW22xH30mm 3K/4K/6.5K       | 22A 350us@230V | 23  | 23W | 2300 | 3000<br>4000<br>6500 | 1440 | 30 |

\*Denotes of Model Number: O:Osram;B:Batten;L:Linkable;1/2/3/4/5F:1/2/3/4/5FT; 5/10/15/20/23W:5/10/15/20/23Watts;TC:Tri-Colour  
\*\*The maximum combined wattages of all linkable battens connected in a single run can be up to 550 Watts.

The Rated Lumen outputs are specified @4000K/6500K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.