

PRODUCT DATASHEET

LN INV DI 1500 P 69W 940 DAVR WT

LINEAR INDIVILED DIRECT/INDIRECT 1500 DALI | Pendant luminaire for single or light line office application with CRI90 and DALI-2 IoT technology, 1500 mm



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct and indirect lighting

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- Pendant luminaires with direct light emission (70%) and indirect light emission (30%)
- High performance with CRI90 and up to 131 lm/W
- IoT-ready luminaire with DALI-2 driver, suitable for VIVARES and other Light Management Systems
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- High color consistency with SDCM 3
- Easy installation
- Low flicker light thanks to special electronic control gear
- Suitable for battery emergency installations acc. to EN 60598-2-22
- Multiple mounting options thanks to different accessories

Product features

- Minimalistic LEDVANCE SCALE design in extruded aluminum housing, available in white and black color



- Includes EVERLOOP: Convenient replacement of light source and LED driver
- Linkable into seamless light line with accessories (surface or pendant mounting)
- Pendant mounting with suspension kit (to be ordered separately)
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Lifetime (L80/B10): 70,000 h (at 25 °C)


TECHNICAL DATA

Electrical data


Nominal wattage	69 W / 63 W / 60 W / 54 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	308...285...270...240 mA
Inrush current	16 A
Inrush current time T_{h50}	200 μ s
Max. number of luminaires per miniature circuit breaker B16	23
Max. number of luminaires per miniature circuit breaker C10	20
Max. number of luminaires per miniature circuit breaker C16	32
Power factor λ	> 0.90
Total harmonic distortion	$\leq$ 20 %
Protection class	I
Operating mode	Integrated LED driver
Dimming interface	DALI-2 / IoT


Photometrical data

Luminous flux	9050 lm / 8400 lm / 8200 lm / 7100 lm
Luminous efficacy	131 lm/W / 133 lm/W / 134 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	$\geq$ 90
Standard deviation of color matching	3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	$\leq$ 1
Stroboscope effect metric (SVM)	$\leq$ 0.4
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 ° + 130 °
UGR	< 19

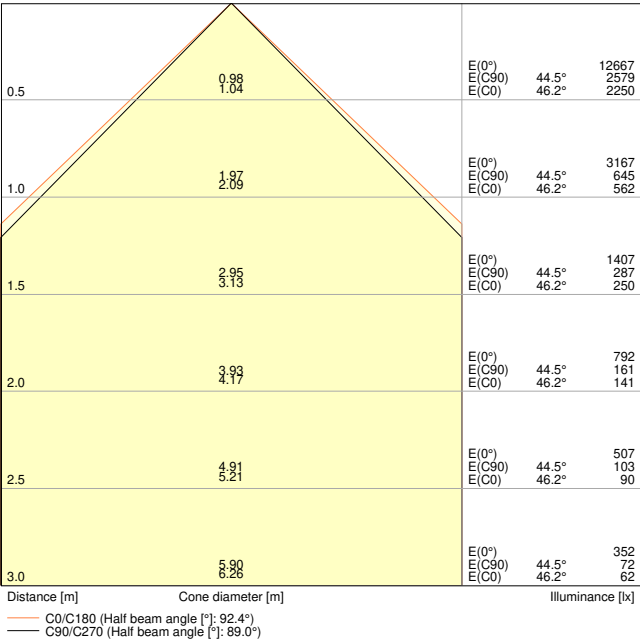

LN INV DI 1500 P 69W 940 DAVR WT 1400mA

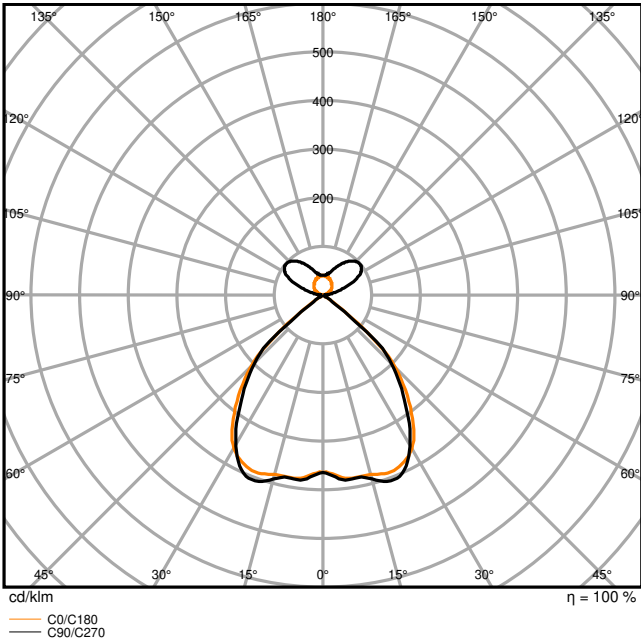



LN INV 1500 P

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	DALI2
IoT ready	Support of DALI data type PART 251, 252, 253 ¹⁾
Mounting type	Suspended
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	Yes

1) Internet of Things. Supports data transfer via gateway to cloud-based monitoring platforms, such as LEDVANCE VIVARES Cloud

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	70000 h ¹⁾
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	1400mA / 1300mA / 1200mA / 1100 mA
ECG - Output ripple current	≤ 5 %
Recommended control gear	OSRAM type ETI DALI 75/220-240/1A4 LT2

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00026-V01.01-EN
Replaceable light source (EPREL)	By the end consumer

Additional product data

Number of illuminants	2
Added function	EVERLOOP / VIVARES / Programmable Multi Lumen

Accessories Mandatory

Product image	Product name	EAN
	LN INV SUSPENSION KIT WT	4099854215537
	LN INV SUSPENSION WIRE	4099854323980

Accessories Optional

Product image	Product name	EAN
	LN INV 1500 THROUGHWIRING KIT	4099854214806
	LN INV INLINE CONNECTOR	4099854215612
	LN INV CORNER CONNECTOR WT	4099854308093
	LN INV INFILL 600 WT	4099854214882
	LN INV INFILL 1200 WT	4099854214868
	LN INV INFILL 1500 WT	4099854214844

EQUIPMENT / ACCESSORIES

- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

Upgrade and replacement components

Components Light Source		
Product image	Product name	EAN
	LISOEV	4099854284854

Product image	Product name	EAN
	LISOEV	4099854285080

Components Driver

Product image	Product name	EAN
	ETI DALI 75/220-240/1A4 LT2 L	4062172126250

Safety advice

- All halogen signal lamps operate at high temperature and pressure. They may therefore only be operated in signal equipment/luminaires specially designed for the purpose. Make sure that the lamps are protected against moisture during operation and in particular during relamping.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	LN INV D PS
	Legal information	LN INV DALI
	Legal information	LSI LN INV DAVR WT
	Legal information	Legal Insert LN INV P DA
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV


Photometric and lighting design files		Document name
	IES file (IES)	LN INV DI 1500 P 69W 940 DAVR WT 1400mA
	LDT file (Eulumdat)	LN INV DI 1500 P 69W 940 DAVR WT 1400mA
	ULD file (DIALux)	LN INV DI 1500 P 69W 940 DAVR WT
	ROLF file (RELUX)	LN INV DI 1500 P 69W 940 DAVR WT
	UGR file (UGR table)	LN INV DI 1500 P 69W 940 DAVR WT 1400mA
	Light distribution curve type cone	LN INV DI 1500 P 69W 940 DAVR WT 1400mA
	Light distribution curve type polar	LN INV DI 1500 P 69W 940 DAVR WT 1400mA
CAD/BIM files		Document name
	BIM Revit 3D	Linear Indiviled G2
	CAD STEP 3D	LN INV D I 1500 G2.
Tender texts		Document name
	Tender documents	LINEAR INDIVILED DIRECTINDIRECT 1500 DALI 1500 P 69W 940 DAVR WT-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854135651	Folding box 1	1,252 mm x 167 mm x 87 mm	4860.00 g	18.19 dm ³
4099854135668	Shipping box 2	1,547 mm x 187 mm x 189 mm	11320.00 g	54.68 dm ³



The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

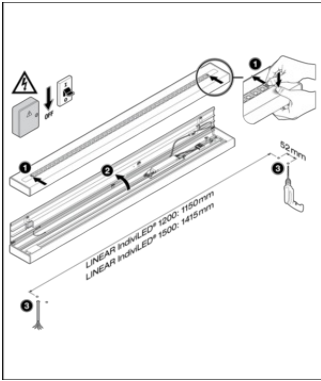

DRIVER		LN INV DI 1500 P 54W DAVR WT Power 54W		LN INV DI 1500 P 69W DAVR WT Power 69W	
LINEAR INNOVLED® DRIVING DALI		DIRECT		INDIRECT	
DRIVER		Total		Total	
LN INV DI 1500 P 54W 950 DAVR WT		COB/AM		COB/AM	
		ETI DALI TW		ETI DALI TW	
		SAA MFL		SAA MFL	
LN INV DI 1500 P 69W 940 DAVR WT		COB/AM		COB/AM	
		ETI DALI TW		ETI DALI TW	
		SAA MFL		SAA MFL	
LN INV DI 1500 P 69W 940 DAVR WT		COB/AM		COB/AM	
		ETI DALI TW		ETI DALI TW	
		SAA MFL		SAA MFL	
LN INV DI 1500 P 69W 940 DAVR WT		COB/AM		COB/AM	
		ETI DALI TW		ETI DALI TW	
		SAA MFL		SAA MFL	

LINEAR INNOVLED® DRIVING DALI WT		DRIVER		DIRECT		INDIRECT		Total		PC		DALI	
				ETI DALI TW		SAA MFL		ETI DALI TW		SAA MFL		ETI DALI TW	
LN INV DI 1500 P 54W 950 DAVR WT	COB/AM	ETI DALI TW	SAA MFL	ETI DALI TW	SAA MFL	ETI DALI TW	SAA MFL	ETI DALI TW	SAA MFL	ETI DALI TW	SAA MFL	ETI DALI TW	SAA MFL
	OPT DALI BE	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	100	100	100	100	100	100
	14W 14PC	100	100	100	100	100	100	10					

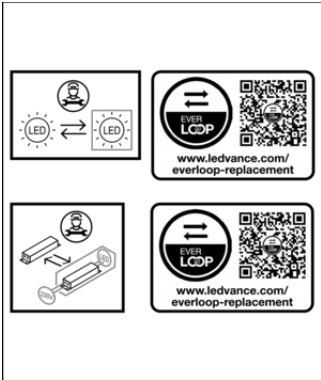

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.