


# PRODUCT DATASHEET

## Highbay Ufo 130W 865 IP65 Black

Highbay Ufo | Highbay luminaires

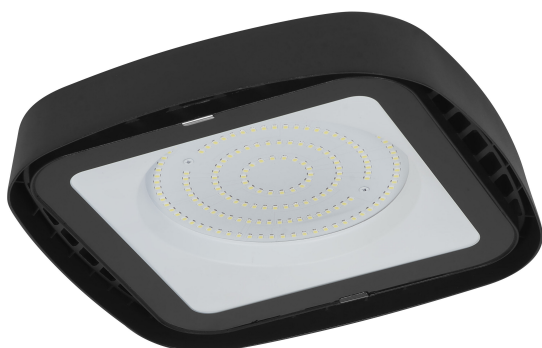

---

### Areas of application

- Garages
- Areas with high ceilings

---

### Product benefits

- High light output thanks to high-power LED
- Robust and long-lasting design
- Suitable for high ceiling installations

---

### Product features

- Type of protection: IP65
- Luminous flux up to 15000 lm



## TECHNICAL DATA

### Electrical data


|   |               |
|---|---------------|
| Nominal wattage   | 130.00 W      |
| Nominal voltage   | 220...240 V   |
| Mains frequency   | 50...60 Hz    |
| Nominal current   | 558.000 mA    |
| Inrush current  | 6.12 A        |
| Inrush current time $T_{h50}$                               | 1760 $\mu$ s  |
| Max. number of luminaires per miniature circuit breaker B16 | 14            |
| Max. number of luminaires per miniature circuit breaker C10 | 14            |
| Max. number of luminaires per miniature circuit breaker C16 | 22            |
| Power factor $\lambda$                                      | > 0.90        |
| Total harmonic distortion                                   | < 20 %        |
| Protection class  | I             |
| Operating mode  | Mains voltage |

### Photometrical data

|  |                |
|--|----------------|
| Luminous flux                                  | 15000 lm       |
| Total luminous flux of contained light sources | 16500 lm       |
| Luminous efficacy                              | 115 lm/W       |
| Color temperature                              | 6500 K         |
| Light color (designation)                      | Daylight White |
| Color rendering index Ra                       | > 70           |
| Standard deviation of color matching           | 6 sdcn         |
| Luminous intensity                             | 5500 cd        |
| Flickering metric (Pst LM)                     | <1             |
| Stroboscope effect metric (SVM)                | <0.4           |
| Photobiological safety group acc. to EN62778   | RG1            |
| Beam angle                                     | 110 °          |

### Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 273.00 mm |
| Width          | 273.00 mm |
| Height         | 83.00 mm  |
| Product weight | 1400.00 g |



HIGHBAY UFO 130W 865 IP65 BK

Materials & Colors

|  |          |
|--|----------|
| Product color                              | Black    |
| Housing color                              | Black    |
| Body material                              | Aluminum |
| Cover material                             | Glass    |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C   |
| Mercury content                            | 0.0 mg   |

Application & Mounting

|  |               |
|--|---------------|
| Ambient temperature range              | -20...+40 °C  |
| Temperature range at storage           | -20...+80 °C  |
| Type of connection                     | Cable, 3-pole |
| Type of protection                     | IP65          |
| Protection class IK (shock resistance) | IK05          |
| Dimmable                               | No            |
| Mounting type                          | Suspended     |
| Application environment                | Outdoor       |
| With light source                      | Yes           |
| Replaceable light source               | No            |

Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 20000 h <sup>1)</sup> |
| Number of switching cycles | 25000                 |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

|  |           |
|--|-----------|
| Standards  | CE / UKCA |
| Luminaire with limited surface temperature, "D sign" | No        |
| Ball shot safe                                       | No        |





## EQUIPMENT / ACCESSORIES

- Mounting hook included

## Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.

## DOWNLOAD DATA

| Documents and certificates   |  | Document name           |
|--|--|-------------------------|
|  | User instruction / safety instructions | HIGHBAY UFO             |
|  | Legal information                      | Endura Style IP65       |
|  | Declarations of conformity             | HIGHBAY UFO 865 IP65 BK |
|  | Declarations of conformity UKCA        | HIGHBAY UFO 865 IP65 BK |

## LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075843424 | Folding box<br>1             | 67 mm x 280 mm x 281 mm              | 1527.00 g    | 5.27 dm <sup>3</sup>  |
| 4058075843431 | Shipping box<br>4            | 300 mm x 286 mm x 305 mm             | 6721.00 g    | 26.17 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.