

PRODUCT DATASHEET MANUAL CONTROL UNIT SELECT DALI-2 EXCHANGEABLE COVER TW

MANUAL CONTROL UNIT SELECT DALI-2 EXC TW | Manual control unit for up-to 25 lights, enables Tunable White lighting, exchangeable cover



Areas of application

- One-room solution for up to 4 access areas
- Meeting and conference rooms
- Restaurants
- Shop lighting
- Private homes

Product benefits

- Simple, intuitive operation
- Manual dimming, switching and saving of light settings
- Individual adjustment of the brightness level and color temperature
- Interchangeable front cover with compatible light button covers of BUSCH-JÄGER, GIRA, JUNG, SCHNEIDER, BERKER, SIEMENS
- Behavior after power interruption can be set
- Mains powered (active mode) or DALI powered (passive mode) operation
- Optional surface mount frame available
- Compatible with LEDVANCE VIVARES DALI light management system (LEDVANCE DALI luminaires)

Product features

- DALI-2 control device for installation in standard flush-mounted boxes
- Rotary knob for manual light control
- Up to 4 control devices can be connected in parallel to set up several control points
- Automatic synchronization between control points
- Number of DALI lights per control unit: up to 25
- Cable length of the DALI control cable: up to 300 m

TECHNICAL DATA

Electrical data

Nominal wattage	2.70 W
Nominal voltage	100240 V
Input current	48 mA
Nominal output current	65 mA
Mains frequency	5060 Hz

Dimensions & Weight



Length	80.00 mm
Width	80.00 mm
Height	53.00 mm
Cable cross-section, input side	0.51.5 mm ²
Wire preparation length, input side	67 mm
Product weight	220.00 g

Colors & materials

Product color White

Temperatures & operating conditions

Ambient temperature range	-20+50 °C
Maximum temperature at tc test point	57 °C

Lifespan

Number of switching cycles	30000
----------------------------	-------

Additional product data

Number of control outputs	1
Number of connectable sensors (only sensors with mains switching contact)	16
Max. number of connected drivers	25
Commissioning App	Ready to use
Light control tool App	No
Groups	1

Capabilities

Dimmable	Yes
Dimming interface	DALI-2
Dimming range	1100 %
Type of installation	Integrated in flush device box

Certificates & Standards

App	proval marks – approval	CE / UKCA / EAC
Pro	otection class	II .
Тур	pe of protection	IP20

Accessories Optional

Product image	Product name	EAN
20 1	SURFACE MOUNT FRAME	4058075843561
T.T.		

DOWNLOAD DATA


	Documents and certifica	ites	Document name	
PDF	User instruction / safety instructions		MCU SELECT DALI-2	
PDF	Extended installation guide		Application guide MCU SELECT DALI-2 controllers	
PDF	Legal information		Legal Insert DALI COMPONENTS	
PDF	Legal information		Informationstext 18 Abs 4 ElektroG	
PDF	Declarations of conformity		MCU DALI	
PDF	Declarations of conformity UKCA		MCU DALI	
	0.12 (2.1.5)	_		
	CAD/BIM files	Docum	nent name	
	CAD STEP 3D	MCU S	SELECT DALI-2 EXC TW	
	Tender texts	Document name		
	Tender documents	MANUAL CONTROL UNIT SELECT DALI 2 EXCHANGEABLE COVER TW-EN		


LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075837522	Folding box	102 mm x 112 mm x 55 mm	264.00 g	0.63 dm ³
4099854334627	Shipping box 30	320 mm x 320 mm x 250 mm	8478.00 g	25.60 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

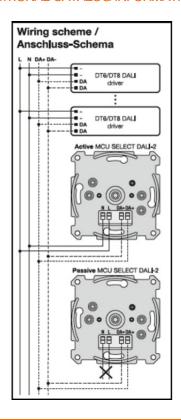





References / Links

- For current information see www.ledvance.com/light-management-systems

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.