

PRODUCT DATASHEET

TRUSYS UNIV P 73W 840 VN CL PS

TRUSYS UNIVERSAL | The solution for refurbishment - universal fitting to existing trunking luminaire system

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Industry halls, high rack warehouse, hardware stores
- Discounters, supermarkets



PERFOR-
MANCE
CLASS

Product benefits

- The solution for refurbishment: universal fitting to existing trunking luminaire system
- Easy installation, no tools required for connection
- Energy saving and cost-effective
- Flexible application due to a range of different lumen packages and beam angles

Product features

- Multi Lumen function: power steps selectable
- Beam angles: 120° (VW), 90° (W), 60° (N), 30° (VN)
- Click into place solution with smart click buttons
- Luminous efficacy: up to 185 lm/W
- Lifetime (L80/B10): up to 100,000 h (at 25 °C)
- Initial color consistency: ≤ 3 SDCM




TECHNICAL DATA

Electrical data


Nominal wattage	73 W / 66 W / 57 W / 49 W / 41 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	330...300...260...220...190 mA
Inrush current	0.33 A
Inrush current time T_{h50}	302 μ s
Max. number of luminaires per miniature circuit breaker B16	8
Max. number of luminaires per miniature circuit breaker C10	8
Max. number of luminaires per miniature circuit breaker C16	14
Power factor λ	≥ 0.90
Total harmonic distortion	$\leq 15\%$
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	12400 lm / 11420 lm / 10030 lm / 8720 lm / 7380 lm
Luminous efficacy	170 lm/W / 173 lm/W / 176 lm/W / 178 lm/W / 180 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	30 °

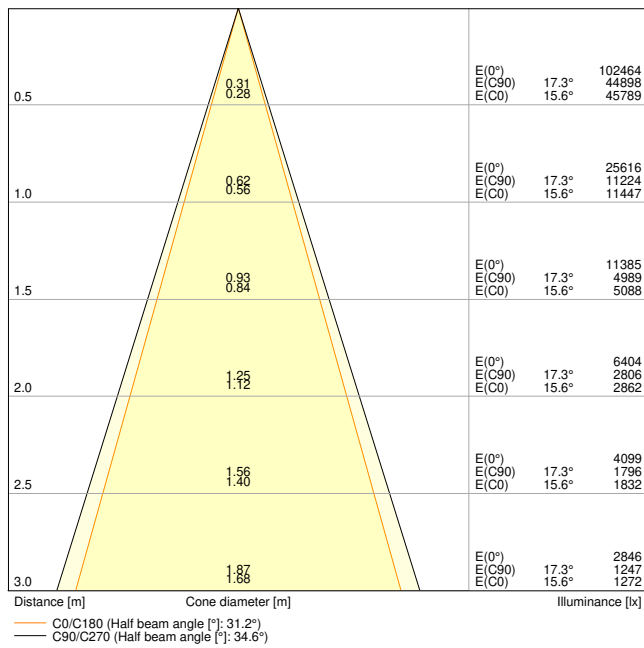


TRUSYS UNIV P 73W 840 VN CL PS

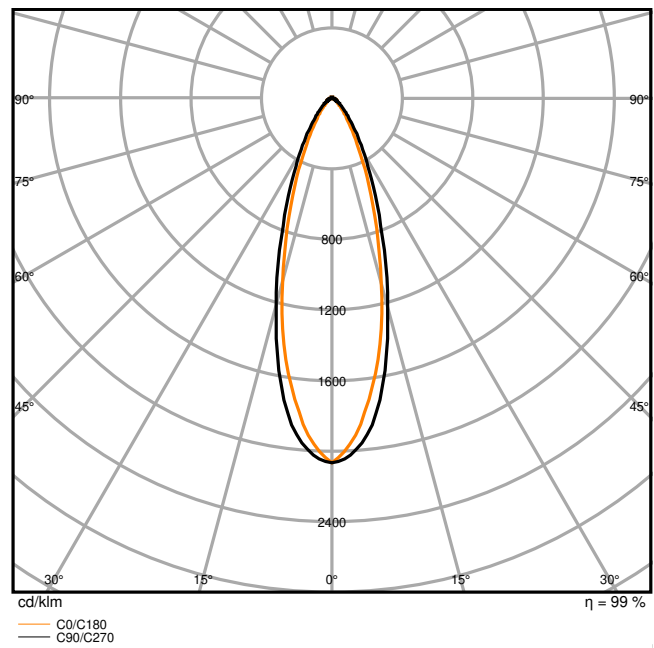

TRUSYS UNIV P 73W 840 VN CL PS

Dimensions & Weight

Length	1504.00 mm
Width	68.00 mm
Height	26.00 mm
Product weight	1695.00 g

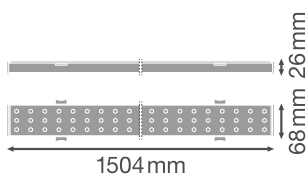

TRUSYS UNIV P 73/75W 840 CL
PS/DALI

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-40...+80 °C
Type of connection	Plug-In connection
Type of protection	IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Mounting rail
Application environment	Indoor
Adjustable	No
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	120000 h ¹⁾
Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L90/B10 at 25 °C	54000 h
Number of switching cycles	50000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	450...400...350...300...250 mA
ECG - Output ripple current	< 5 %

Certificates & Standards

Standards	CE / CB / UKCA / ENEC / TÜV / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

EPD	LEDV-00033-V01.01-EN
Replaceable light source (EPREL)	Not replaceable








Additional product data






Added function	MULTI SELECT
----------------	--------------



EQUIPMENT / ACCESSORIES



– Various accessories available


DOWNLOAD DATA

	Documents and certificates	Document name
	User instruction / safety instructions	TRUSYS UNIVERSAL
	Legal information	Legal insert
	Legal information	LISO Insert TRUSYS UNIVERSAL
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11205497
	Declarations of conformity	CE Declaration Trusys Universal
	Declarations of conformity UKCA	UKCA Declaration Trusys Universal

	Photometric and lighting design files	Document name
	IES file (IES)	TRUSYS UNIV P 73W 840 VN CL PS
	LDT file (Eulumdat)	TRUSYS UNIV P 73W 840 VN CL PS
	ULD file (DIALux)	TRUSYS UNIV P 73W 840 VN CL PS
	ROLF file (RELUX)	TRUSYS UNIV P 73W 840 VN CL PS
	UGR file (UGR table)	TRUSYS UNIV P 73W 840 VN CL PS

Photometric and lighting design files		Document name
	Light distribution curve type cone	TRUSYS UNIV P 73W 840 VN CL PS
	Light distribution curve type polar	TRUSYS UNIV P 73W 840 VN CL PS

CAD/BIM files		Document name
	BIM Revit 3D	TruSys Universal
	CAD STEP 3D	TRUSYS UNIV


Tender texts		Document name
	Tender documents	TRUSYS UNIVERSAL 73W 840 VN CL PS-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854311581	Folding box 1	93 mm x 1,540 mm x 69 mm	1985.00 g	9.88 dm ³
4099854311598	Shipping box 4	1,560 mm x 295 mm x 110 mm	9400.00 g	50.62 dm ³




The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

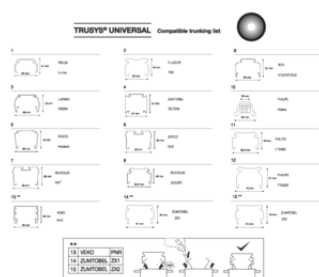

TRUSYS UNIVERSAL ON/OFF

W	LM	1	2	3	4
41W	7380	—	—	—	ON
49W	8720	—	—	ON	—
57W	10030	—	ON	—	—
66W	11420	ON	—	—	—
73W	12400	—	—	—	—

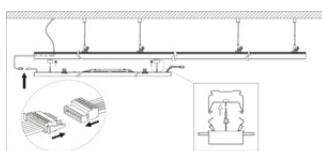1x TRUSYS UNIV	2x TRUSYS UNIV	3x TRUSYS UNIV
CS A 000	BS A 000	CS A 000
TRUSYS UNIV ON/OFF	0	0
TRUSYS UNIV DALI	7	0
	14	21
	21	28
	28	35
	35	42
	42	49
	49	56
	56	63
	63	70
	70	77
	77	84
	84	91
	91	98
	98	105
	105	112
	112	119
	119	126
	126	133
	133	140
	140	147
	147	154
	154	161
	161	168
	168	175
	175	182
	182	189
	189	196
	196	203
	203	210
	210	217
	217	224
	224	231
	231	238
	238	245
	245	252
	252	259
	259	266
	266	273
	273	280
	280	287
	287	294
	294	301
	301	308
	308	315
	315	322
	322	329
	329	336
	336	343
	343	350
	350	357
	357	364
	364	371
	371	378
	378	385
	385	392
	392	399
	399	406
	406	413
	413	420
	420	427
	427	434
	434	441
	441	448
	448	455
	455	462
	462	469
	469	476
	476	483
	483	490
	490	497
	497	504
	504	511
	511	518
	518	525
	525	532
	532	539
	539	546
	546	553
	553	560
	560	567
	567	574
	574	581
	581	588
	588	595
	595	602
	602	609
	609	616
	616	623
	623	630
	630	637
	637	644
	644	651
	651	658
	658	665
	665	672
	672	679
	679	686
	686	693
	693	700
	700	707
	707	714
	714	721
	721	728
	728	735
	735	742
	742	749
	749	756
	756	763
	763	770
	770	777
	777	784
	784	791
	791	798
	798	805
	805	812
	812	819
	819	826
	826	833
	833	840
	840	847
	847	854
	854	861
	861	868
	868	875
	875	882
	882	889
	889	896
	896	903
	903	910
	910	917
	917	924
	924	931
	931	938
	938	945
	945	952
	952	959
	959	966
	966	973
	973	980
	980	987
	987	994
	994	1001
	1001	1008
	1008	1015
	1015	1022
	1022	1029
	1029	1036
	1036	1043
	1043	1050
	1050	1057
	1057	1064
	1064	1071
	1071	1078
	1078	1085
	1085	1092
	1092	1099
	1099	1106
	1106	1113
	1113	1120
	1120	1127
	1127	1134
	1134	1141
	1141	1148
	1148	1155
	1155	1162
	1162	1169
	1169	1176
	1176	1183
	1183	1190
	1190	1197
	1197	1204
	1204	1211
	1211	1218
	1218	1225
	1225	1232
	1232	1239
	1239	1246
	1246	1253
	1253	1260
	1260	1267
	1267	1274
	1274	1281
	1281	1288
	1288	1295
	1295	1302
	1302	1309
	1309	1316
	1316	1323
	1323	1330
	1330	1337
	1337	1344
	1344	1351
	1351	1358
	1358	1365
	1365	1372
	1372	1379
	1379	1386
	1386	1393
	1393	1400
	1400	1407
	1407	1414
	1414	1421
	1421	1428
	1428	1435
	1435	1442
	1442	1449
	1449	1456
	1456	1463
	1463	1470
	1470	1477
	1477	1484
	1484	1491
	1491	1498
	1498	1505
	1505	1512
	1512	1519
	1519	1526
	1526	1533
	1533	1540
	1540	1547
	1547	1554
	1554	1561
	1561	1568
	1568	1575
	1575	1582
	1582	1589
	1589	1596
	1596	1603
	1603	1610
	1610	1617
	1617	1624
	1624	1631
	1631	1638
	1638	1645
	1645	1652
	1652	1659
	1659	1666
	1666	1673
	1673	1680
	1680	1687
	1687	1694
	1694	1701
	1701	1708
	1708	1715
	1715	1722
	1722	1729
	1729	1736
	1736	1743
	1743	1750
	1750	1757
	1757	1764
	1764	1771
	1771	1778
	1778	1785
	1785	1792
	1792	1799
	1799	1806
	1806	1813
	1813	1820
	1820	1827
	1827	1834
	1834	1841
	1841	1848
	1848	1855
	1855	1862
	1862	1869
	1869	1876
	1876	1883
	1883	1890
	1890	1897
	1897	1904
	1904	1911
	1911	1918
	1918	1925
	1925	1932
	1932	1939
	1939	1946
	1946	1953
	1953	1960
	1960	1967
	1967	1974
	1974	1981
	1981	1988
	1988	1995
	1995	2002
	2002	2009
	2009	2016
	2016	2023
	2023	2030
	2030	2037
	2037	2044
	2044	2051
	2051	2058
	2058	2065
	2065	2072
	2072	2079
	2079	2086
	2086	2093
	2093	2100
	2100	2107
	2107	2114
	2114	2121
	2121	2128
	2128	2135
	2135	2142
	2142	2149
	2149	2156
	2156	2163
	2163	2170
	2170	2177
	2177	2184
	2184	2191
	2191	2198
	2198	2205
	2205	2212
	2212	2219
	2219	2226
	2226	2233
	2233	2240
	2240	2247
	2247	2254
	2254	2261
	2261	2268
	2268	2275
	2275	2282
	2282	2289
	2289	2296
	2296	2303
	2303	2310
	2310	2317
	2317	2324
	2324	2331
	2331	2338
	2338	2345
	2345	2352
	2352	2359
	2359	2366
	2366	2373
	2373	2380
	2380	

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.