

# PRODUCT DATASHEET

## FL FLEX DA P 130W 840 R30 WAL

FLOODLIGHT FLEX DALI RADIAL SYMMETRIC 30 | DALI D4i floodlight with radial symmetric light distribution for high mast area lighting



### Areas of application

- Coastal areas, like ports
- General outdoor area lighting
- Parking
- Suitable for indoor and outdoor sports facilities
- Architectural lighting
- Industry
- Direct replacement for luminaires using HID lamps

### Product benefits

- Corrosion resistance C5: tested in environments with high salinity
- Serviceable luminaire: LED driver can be replaced
- Flexible application due to a range of different lumen packages and beam angles
- 3 cable entries for flexible use and easy connection between luminaires
- Integrated breather for preventing condensation inside the luminaire
- Energy savings of up to 91 % compared to halogen lamp floodlights
- Energy savings of up to 51 % compared to luminaires that use conventional discharge lamps
- No upper light output ratio (ULOR 0%) when mounted at 0° tilt
- Intelligent design of the water drain to prevent standing water
- Simple angle adjustment by locking every 2.5°
- Clear angular degree indication
- Key hole to ensure ease of installation

### Product features



- Corrosion resistance C5 based on 1,500 hours salt mist spray test
- High luminous efficacy: up to 160 lm/W
- DALI D4i drivers for smart city applications
- Daisy chaining possible
- High surge protection: up to 10 kV (L/N-PE), 6 kV (L-N)
- High lifetime (L70/B50): up to 120,000 h (at 25 °C)
- Lumen packages up to 70000 lm
- Additional 2200 K color temperature version available


## TECHNICAL DATA

### Electrical data


|                                                             |                       |
|-------------------------------------------------------------|-----------------------|
| Nominal wattage                                             | 130.00 W              |
| Nominal voltage                                             | 220...240 V           |
| Mains frequency                                             | 50...60 Hz            |
| Nominal current                                             | 586.000 mA            |
| Inrush current                                              | 125 A                 |
| Inrush current time $T_{h50}$                               | 122 $\mu$ s           |
| Max. number of luminaires per miniature circuit breaker B16 | 9                     |
| Max. number of luminaires per miniature circuit breaker C10 | 8                     |
| Max. number of luminaires per miniature circuit breaker C16 | 14                    |
| Power factor $\lambda$                                      | > 0.90                |
| Total harmonic distortion                                   | < 20 %                |
| Protection class                                            | I                     |
| Surge capability (L-N)                                      | 6 kV                  |
| Surge capability (L/N-Ground)                               | 10 kV                 |
| Operating mode                                              | Integrated LED driver |
| Dimming interface                                           | DALI-2 / IoT          |

### Photometrical data

|                                              |            |
|----------------------------------------------|------------|
| Luminous flux                                | 20800 lm   |
| Luminous efficacy                            | 160 lm/W   |
| Color temperature                            | 4000 K     |
| Light color (designation)                    | Cool White |
| Color rendering index Ra                     | > 80       |
| Standard deviation of color matching         | 5 sdcn     |
| Low flicker                                  | Yes        |
| Flickering metric (Pst LM)                   | <1         |
| Stroboscope effect metric (SVM)              | <0.4       |
| Photobiological safety group acc. to EN62778 | RG1        |
| Beam angle                                   | 30 °       |

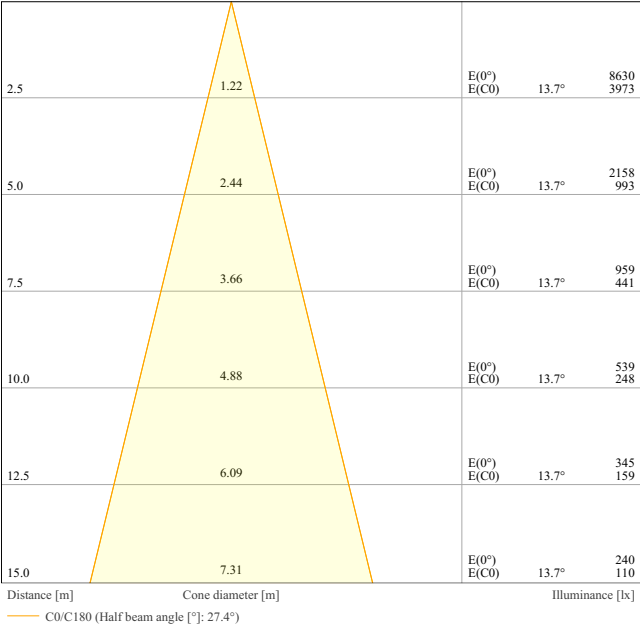


FL FLEX DA/P 130W ML 840 R30 WAL

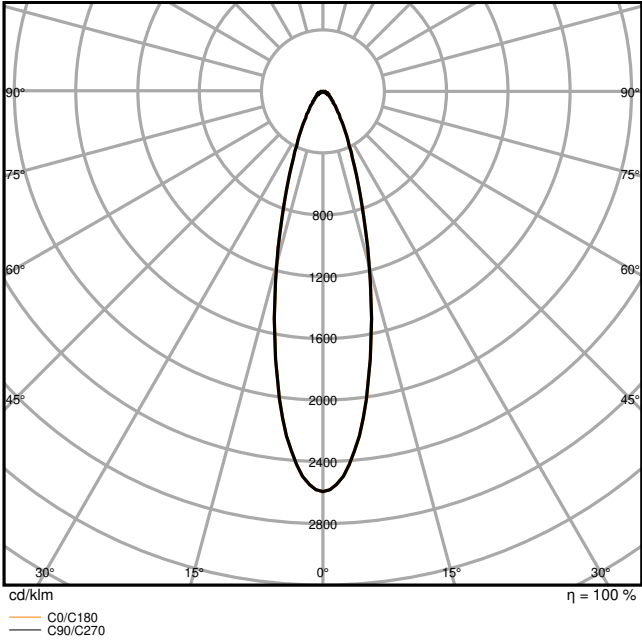

FL FLEX DA P 130W 840 R30 WAL LEDV

Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 492.00 mm |
| Width          | 361.00 mm |
| Height         | 68.00 mm  |
| Product weight | 6000.00 g |



FL FLEX P WAL

Materials & Colors

|                                            |                |
|--------------------------------------------|----------------|
| Product color                              | White aluminum |
| Housing color                              | White aluminum |
| RAL Color (most similar)                   | RAL 9005       |
| Body material                              | Aluminum       |
| Cover material                             | Glass          |
| Light emitting surface material            | Glass          |
| Glow Wire Test according to IEC 60695-2-12 | 850 °C         |
| Mercury content                            | 0.0 mg         |

### Application & Mounting

|                                             |                                                            |
|---------------------------------------------|------------------------------------------------------------|
| Ambient temperature range                   | -30...+50 °C                                               |
| Temperature range at storage                | -30...+80 °C                                               |
| Type of connection                          | Screwless terminal                                         |
| Type of protection                          | IP66                                                       |
| Protection class IK (shock resistance)      | IK08                                                       |
| Corrosion resistance class acc. to EN 12944 | C5                                                         |
| Dimmable                                    | Yes                                                        |
| Type of dimming                             | DALI D4i                                                   |
| IoT ready                                   | Support of DALI data type PART 251, 252, 253 <sup>1)</sup> |
| Mounting type                               | Surface                                                    |
| Mounting location                           | Wall / Pole / Floor / Ceiling                              |
| Application environment                     | Outdoor                                                    |
| Adjustable                                  | Yes                                                        |
| With light source                           | Yes                                                        |
| Replaceable light source                    | No                                                         |

<sup>1)</sup> Internet of Things. Supports data transfer via gateway to cloud-based monitoring platforms, such as LEDVANCE VIVARES Cloud

### Lifespan

|                            |                        |
|----------------------------|------------------------|
| Lifespan L70/B50 at 25 °C  | 120000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 100000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 100000 h               |
| Lifespan L90/B10 at 25 °C  | 50000 h                |
| Number of switching cycles | 100000                 |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                             |         |
|-----------------------------|---------|
| Output current              | 4200 mA |
| ECG - Output ripple current | < 10 %  |

### Certificates & Standards

|                                                      |                             |
|------------------------------------------------------|-----------------------------|
| Standards                                            | CE / CB / ENEC / UKCA / EPD |
| Luminaire with limited surface temperature, "D sign" | Yes                         |
| EPD                                                  | LEDV-00046-V01.01-EN        |
| Replaceable light source (EPREL)                     | Not replaceable             |

### Additional product data

|                |         |
|----------------|---------|
| Added function | VIVARES |
|----------------|---------|

### Accessories Optional

| Product image                                                                       | Product name                 | EAN           |
|-------------------------------------------------------------------------------------|------------------------------|---------------|
|    | FL TRAVERSE 1/2 42/60/76MM   | 4099854680038 |
|  | FL FLEX ADAPTER SOCKET ZHAGA | 4099854680076 |
|  | FL FLEX ADAPTER SOCKET NEMA  | 4099854680113 |

### EQUIPMENT / ACCESSORIES

- Delivery without cables
- Second cable gland included
- 2 rubber inserts for 6,5 - 7,5 mm cables included

### DOWNLOAD DATA

| Documents and certificates                                                                                                | Document name                      |
|---------------------------------------------------------------------------------------------------------------------------|------------------------------------|
|  User instruction / safety instructions | FL FLEX P DALI                     |
|  Legal information                      | Informationstext 18 Abs 4 ElektroG |

| Documents and certificates                                                         |                                     | Document name                                                |
|------------------------------------------------------------------------------------|-------------------------------------|--------------------------------------------------------------|
|    | Legal information                   | Safety Insert G11205497                                      |
|    | Legal information                   | LSI FL FLEX DALI                                             |
|    | Legal information                   | FL FLEX DA P                                                 |
|    | Declarations of conformity          | CE FL FLEX P                                                 |
|    | Declarations of conformity UKCA     | UKCA FL FLEX P                                               |
|    | Certificates                        | ENEC FL FLEX P                                               |
|    | EU Data Act                         | DALI LED Driver and Luminaires                               |
|    | EPD                                 | EPD EN FLOODLIGHT FLEX DALI                                  |
| Photometric and lighting design files                                              |                                     | Document name                                                |
|  | IES file (IES)                      | FL FLEX DA P 130W 840 R30 WAL LEDV                           |
|  | LDT file (Eulumdat)                 | FL FLEX DA P 130W 840 R30 WAL LEDV                           |
|  | ULD file (DIALux)                   | FL FLEX DA P 130W 840 R30 WAL                                |
|  | ROLF file (RELUX)                   | FL FLEX DA P 130W 840 R30 WAL                                |
|  | Light distribution curve type cone  | FL FLEX DA/P 130W ML 840 R30 WAL                             |
|  | Light distribution curve type polar | FL FLEX DA P 130W 840 R30 WAL LEDV                           |
| CAD/BIM files                                                                      |                                     | Document name                                                |
|  | BIM Revit 3D                        | Floodlight Flex                                              |
|  | CAD STEP 3D                         | FL FLEX 130W                                                 |
| Tender texts                                                                       |                                     | Document name                                                |
|  | Tender documents                    | FLOODLIGHT FLEX DALI RADIAL SYMMETRIC 30 130W 840 R30 WAL-en |

---

**LOGISTICAL DATA**

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4099854373459 | Shipping box<br>1            | 572 mm x 402 mm x 119 mm             | 7303.00 g    | 27.36 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**References / Links**

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.