


# PRODUCT DATASHEET

## PUSHBUTTON COUPLER DALI-2

PUSHBUTTON COUPLER DALI-2 | DALI-2 interface to integrate standard lighting switches in DALI systems

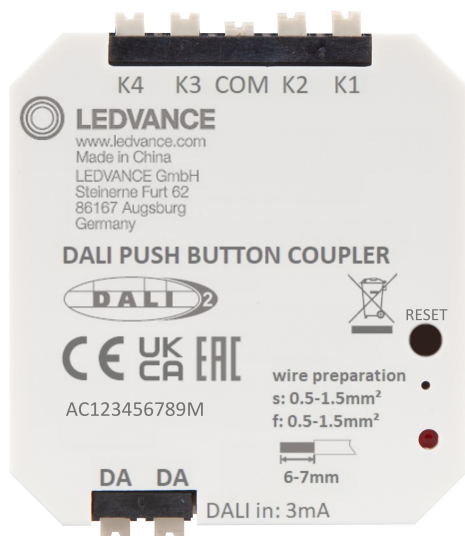

### Areas of application

- Single rooms
- Open office spaces
- Restaurants
- Stairways
- Sanitary areas
- Private homes

### Product benefits

- Can be combined with standard light buttons
- Integrated DALI bus power supply (no mains connection required)
- Several couplers can be connected to a DALI line
- Easy installation with pre-assembled connection cable
- Compatible with LEDVANCE VIVARES DALI light management system

### Product features


- DALI-2 certified pushbutton coupler
- Installation in standard flush-mounted boxes
- 4 potential-free inputs

TECHNICAL DATA

Electrical data

Nominal wattage	0.20 W
Nominal voltage	16 V
Mains frequency	0 Hz

Dimensions & Weight



Length	50.00 mm
Width	43.00 mm
Height	15.00 mm
Cable cross-section, input side	0.2...1.5 mm <sup>2</sup>
Wire preparation length, input side	6...7 mm
Product weight	19.00 g

Colors & materials

Product color	White
---------------	-------

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
---------------------------	--------------







Capabilities

Dimmable	Yes
Dimming interface	DALI-2
Type of installation	Integrated in flush device box

Certificates & Standards

Approval marks – approval	CE / UKCA / EAC
Protection class	II
Type of protection	IP20

DOWNLOAD DATA



Documents and certificates		Document name
	User instruction / safety instructions	PUSHBUTTON COUPLER DALI-2
	Legal information	Legal Insert DALI COMPONENTS
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	PUSHBUTTON COUPLER DALI-2
	Declarations of conformity UKCA	PUSHBUTTON COUPLER DALI-2
Tender texts		Document name
	Tender documents	DALI-2 PUSH BUTTON COUPLER-EN

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075837607	Folding box 1	45 mm x 86 mm x 100 mm	44.00 g	0.39 dm <sup>3</sup>
4058075837614	Shipping box 20	245 mm x 192 mm x 225 mm	1 154.00 g	10.58 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## ADDITIONAL CATALOG INFORMATION



## References / Links

– For current information see [www.ledvance.com/light-management-systems](http://www.ledvance.com/light-management-systems)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.