



# PRODUCT DATASHEET

## DP MAX 1200 S 27W 840 VW IP69

DAMP PROOF MAX | Tubular damp-proof luminaires with extra high IP and IK protection

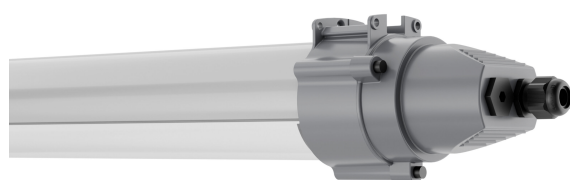

### Areas of application

- Food industry
- Open car parks and underpasses
- Car wash facilities
- Outdoor applications
- Industrial and storage facilities
- Workshops, assembly lines
- Passages, underpasses
- Parking garages

### Product benefits

- Uniform light distribution
- Flexible application through a wide range of beam angles
- Versatile applications due to resistance to many chemicals and UV light
- Easy to clean, even at high temperatures with a high-pressure cleaner
- Energy savings up to 68 % (compared to luminaires that use fluorescent lamps)
- Low flicker  $\leq 5$  %

### Product features

- High luminous efficacy: up to 158 lm/W
- Lifetime (L80/B50): up to 100,000 h (at 35 °C)
- Type of protection: IP66, IP69 (80 °C)
- Impact resistance: IK10
- Ammonia resistant
- UV-resistant PMMA diffuser
- Compatible to Zhaga Book 7 LED light sources




## TECHNICAL DATA

### Electrical data


Nominal wattage	27.00 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	117 mA
Inrush current	4 A
Inrush current time $T_{h50}$	1300 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	36
Max. number of luminaires per miniature circuit breaker C10	36
Max. number of luminaires per miniature circuit breaker C16	60
Power factor $\lambda$	$\geq 0.91$
Total harmonic distortion	13 %
Protection class	I
Surge capability (L-N)	4 kV
Surge capability (L/N-Ground)	4 kV
Operating mode	Integrated LED driver

### Photometrical data

Luminous flux	4000 lm
Total luminous flux of contained light sources	4430 lm
Luminous efficacy	148 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	$\leq 3$ sdc <sub>m</sub>
Low flicker	Yes
Flickering metric (Pst LM)	$\leq 1$
Stroboscope effect metric (SVM)	$\leq 0.4$
Photobiological safety group acc. to EN62778	RG1
Beam angle	133 ° x 107 °
UGR	< 25

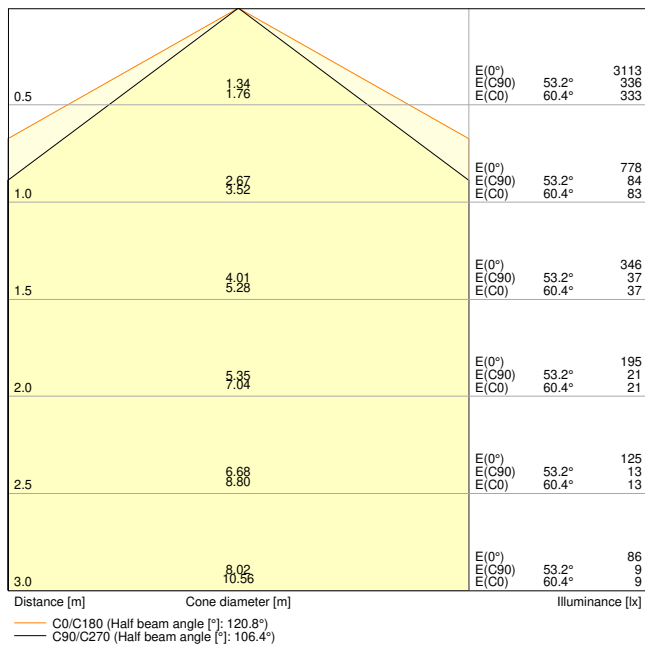


DP MAX 1200 S 27W 840 IP69

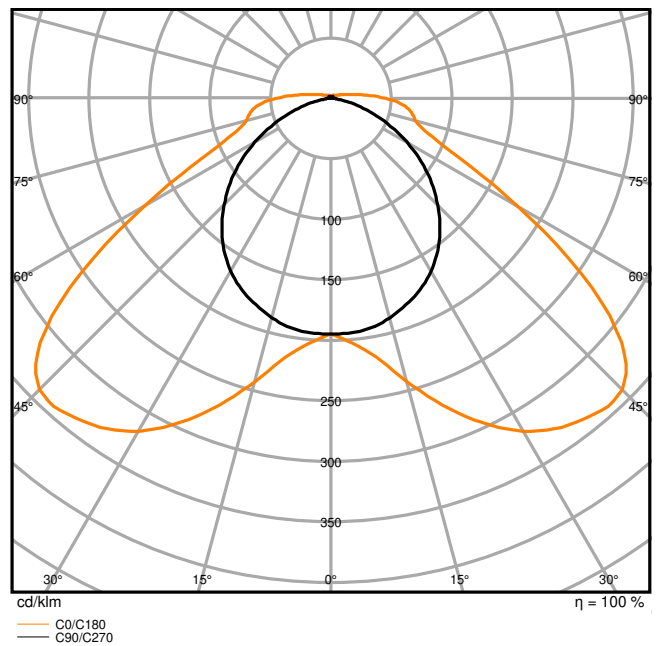

DP MAX 1200 S 27W 840 IP69

Dimensions & Weight

Length	1450.00 mm
Width	125.00 mm
Height	138.00 mm
Product weight	4400.00 g



DP MAX 1200 840

Materials & Colors

Product color	Gray
Housing color	Gray
Body material	Polymethylmethacrylate (PMMA)
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-40...+50 °C
Temperature range at storage	-40...+50 °C
Type of connection	Screwless terminal, 3-Pole
Type of protection	IP66/IP69K
Protection class IK (shock resistance)	IK10
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Ceiling / Wall
Application environment	Outdoor
With light source	Yes
Replaceable light source	No

### Lifespan

Lifespan L70/B50 at 25 °C	100000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	100000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	100000 h
Number of switching cycles	> 200000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L80 / B50 @ 35 °C (Ta)

### Control gear

Output current	125...550 mA
ECG - Output ripple current	< 1 %
Recommended control gear	OT FIT 100/220...240/700 D NFC IND L



### Emergency lighting

Type of Emergency Lighting (EL)	EL certified driver (0Hz / DC operation) for central battery operation included
Type of emergency operation test	None

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	Yes
Ball shot safe	No

Accessories Optional

Product image	Product name	EAN
	DP MAX MOUNTING BRACKET CLAMPS V4A	4099854583360
	DP MAX MOUNTING TUBE CLAMPS V4A	4099854583384






EQUIPMENT / ACCESSORIES












- Stainless steel clamps and M25 cable gland included

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	DAMP PROOF MAX
 Legal information	Safety Insert G11205497
 Legal information	Informationstext 18 Abs 4 ElektroG
 Legal information	DP MAX
 Legal information	Legal insert G11231557

Documents and certificates		Document name
	Declarations of conformity	DP MAX
	Declarations of conformity UKCA	DP MAX
Photometric and lighting design files		Document name
	IES file (IES)	DP MAX 1200 S 27W 840 IP69
	LDT file (Eulumdat)	DP MAX 1200 S 27W 840 IP69
	ULD file (DIALux)	DP MAX 1200 S 27W 840 VW IP69
	UGR file (UGR table)	DP MAX 1200 S 27W 840 IP69
	Light distribution curve type cone	DP MAX 1200 S 27W 840 IP69
	Light distribution curve type polar	DP MAX 1200 S 27W 840 IP69
CAD/BIM files		Document name
	BIM Revit 3D	DP MAX
	CAD STEP 3D	DP MAX 1200
Tender texts		Document name
	Tender documents	DAMP PROOF MAX 1200 S 27W 840 VW IP69-en

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075849808	Shipping box 1	1,581 mm x 165 mm x 146 mm	5485.00 g	38.09 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.


**ADDITIONAL CATALOG INFORMATION**



Ø	AWG	Ø AWG	Ø AWG
DP MAX 600	26	26	43
DP MAX 1200	26	26	60
DP MAX 1800	26	26	60

Ø	AWG	Ø AWG
TH 2.0mm	26	33
TH 2.5mm	26	33



### References / Links

- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.