

# PRODUCT DATASHEET

## Essential Panel Round 300mm 20W 830 White

Essential Panel Round | Essential Panel Ceilings for easy use



---

### Areas of application

- Living areas (living rooms, dining rooms, bedrooms etc.)

---

### Product benefits

- Long lifetime thanks to LED technology
- Excellent price/performance ratio
- Easy mounting thanks to included steel hooks on the back

---

### Product features

- Durable housing material
- Color temperature: 3,000 K
- Lifetime up to 25,000 h
- Type of protection: IP20

---

## TECHNICAL DATA

### Electrical data


Nominal wattage	20.00 W
Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Nominal current	135 mA
Inrush current	0.14 A
Inrush current time $T_{h50}$	240 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	45
Max. number of luminaires per miniature circuit breaker C10	40
Max. number of luminaires per miniature circuit breaker C16	64
Power factor $\lambda$	> 0.5
Total harmonic distortion	110 %
Protection class	II
Operating mode	Mains voltage

### Photometrical data

Luminous flux	1800 lm
Total luminous flux of contained light sources	2200 lm
Luminous efficacy	90 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	6 sdc <sub>m</sub>
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	110 °

### Dimensions & Weight

Diameter	293.00 mm
Height	29.00 mm
Product weight	560.00 g

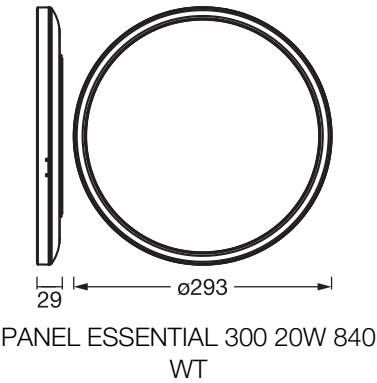

Materials & Colors

Product color	White
Housing color	White
Body material	Polypropylene (PP)
Cover material	Polypropylene (PP)
Glow Wire Test according to IEC 60695-2-12	650 °C

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+70 °C
Type of connection	Terminal, 2-Pole (L, N)
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Surface
Mounting location	Wall / Ceiling
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	25000 h <sup>1)</sup>
Number of switching cycles	12500

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Emergency lighting

Type of emergency operation test	None
----------------------------------	------

Certificates & Standards

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

#### Additional product data

Product remark	Available from September 2025
----------------	-------------------------------


#### EQUIPMENT / ACCESSORIES

- Mounting screws and dowels included

#### Safety advice

- Luminaire must be disconnected from mains during installation, maintenance and cover removal
- Check wall-ceiling for suitability. If uncertain, seek professional advice.
- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.

#### DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	Panel Essential Round

#### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075854475	Folding box 1	35 mm x 300 mm x 303 mm	704.00 g	3.18 dm <sup>3</sup>
4058075854482	Shipping box 5	315 mm x 190 mm x 325 mm	3773.00 g	19.45 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.