


# PRODUCT DATASHEET

## Flex Acoustic Black 2.6M H10 mm 830 Extension Kit

Flex Acoustic Black | Black LED Strips designed for acoustic panels

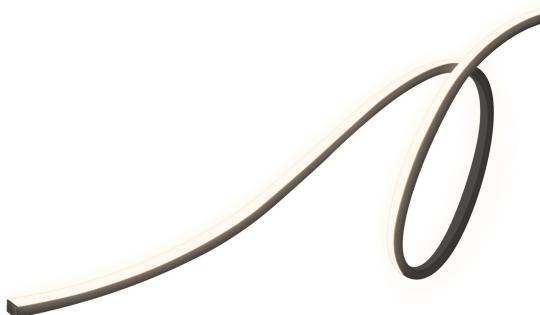

### Areas of application

- Designed to fit acoustic panels with slat heights (=mounting depth) of around 10 mm / 13 mm for seamless integration
- Suitable for acoustic panels with slat spacing  $\geq$  12.4 mm
- Also ideal for any dark surface - discreet and unobtrusive thanks to the black finish

### Product benefits

- Stylish lighting solution for acoustic panels with exceptionally uniform light distribution
- Matte black finish makes it nearly invisible in black felt acoustic panels when switched off
- Easy, tool-free installation with 3M adhesive backing

### Product features

- Warm white, cuttable LED strip with black silicone sleeve and matte black light-emitting surface
- Starter Set: powerful power supply (supports up to 3 LED strips) and RF remote for convenient ON/OFF and dimming included

## TECHNICAL DATA

## Electrical data


Nominal wattage	24.00 W
Nominal voltage	24 V
Nominal current	142.000 mA
Inrush current	0.0298 A
Max. number of luminaires per miniature circuit breaker B16	55
Max. number of luminaires per miniature circuit breaker C10	46
Max. number of luminaires per miniature circuit breaker C16	74
Power factor $\lambda$	1.00
Protection class	III
Operating mode	Mains voltage

## Photometrical data


Luminous flux	208 lm
Total luminous flux of contained light sources	1000 lm
Luminous efficacy	9 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	$\leq 6$ sdcM
Photobiological safety group acc. to EN62778	RG0
Beam angle	120 °

## Dimensions &amp; Weight

Length	2600.00 mm
Width	12.40 mm
Height	10.00 mm
Product weight	370.00 g



Flex Acoustic Black Clips



FLEX ACOUSTIC BLACK 2.6M H10MM 830 EXT

## Materials & Colors

Product color	Matt black
Housing color	Matt black
Body material	Silicone
Mercury content	0.0 mg

## Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Plug type C (EU)
Type of protection	IP20
Dimmable	Yes
Mounting type	Surface
Replaceable light source	No

## Lifespan

Lifespan L70/B50 at 25 °C	30000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	30000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	30000 h
Number of switching cycles	15000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

## Certificates & Standards

Standards	CE
Replaceable light source (EPREL)	Not replaceable

## EQUIPMENT / ACCESSORIES

- Two metal clips for optional fastening the ends included
- Black silicone end cap for a clean finish after cutting included
- Batteries required for remote control: 2xAAA (not included)

## Safety advice

- Do not connect the rope light to the supply while it is wound onto a reel. The string of lights may not be operated within the packaging. Do not open the lightstrip.

## DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	User Instruction G11246243 FLEX ACOUSTIC BLACK
 Legal information	Safety Insert G11265518_R
 Legal information	Legal Insert G11233093 SMART WIFI MAT
 Legal information	German Insert G11212367
 Declarations of conformity	FLEX ACOUSTIC BLACK EXT

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854677878	Folding box 1	62 mm x 232 mm x 275 mm	470.00 g	3.96 dm <sup>3</sup>
4099854677885	Shipping box 6	390 mm x 255 mm x 305 mm	3.05 g	30.33 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.