

# PRODUCT DATASHEET O FACADE SPOT 8 W 3000 K IP54 WT

OUTDOOR FACADE SPOT | Luminaires with rotatable head and directional light



### Areas of application

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

### Product benefits

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

### **Product features**

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Adjustable modules: rotation angle 320°
- Diffuser made of opal polycarbonate
- Available in two housing colors: white and dark gray



# TECHNICAL DATA


# Electrical data


Nominal wattage	8.00 W
Nominal voltage	220240 V
Mains frequency	5060 Hz
Nominal current	66 mA
Max. number of luminaires per miniature circuit breaker B16	35
Max. number of luminaires per miniature circuit breaker C10	45
Max. number of luminaires per miniature circuit breaker C16	28
Power factor $\lambda$	> 0.5
Protection class	I
Operating mode	Mains voltage

# Photometrical data

Luminous flux	460 lm
Luminous efficacy	60 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥80
Standard deviation of color matching	< 6 sdcm
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	110°

November 22, 2025, 19:57:01 O FACADE SPOT 8 W 3000 K IP54 WT

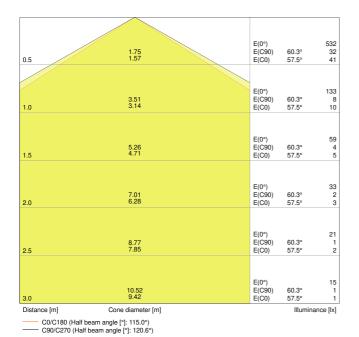




O Facade Spot 8W3000K WT IP54

4058075074712 O Facade Spot 8W3000K GY IP54

# Dimensions & Weight

Length	135.00 mm
Width	90.00 mm
Height	140.00 mm
Product weight	600.00 g



### Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polycarbonate (PC)
Mercury content	0.0 mg

# **Application & Mounting**

Ambient temperature range	-20+40 °C
Type of connection	Screw terminal, 3-Pole
Type of protection	IP54
Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Surface
Mounting location	Wall
Application environment	Outdoor
Replaceable light source	No

# Lifespan

Lifespan L70/B50 at 25 °C	30000 h <sup>1)</sup>
Number of switching cycles	15000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Certificates & Standards

Standards	CE
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

### **EQUIPMENT / ACCESSORIES**

- Complete mounting and connecting accessories included

# DOWNLOAD DATA

	Documents and certificates	Document name
POF	User instruction / safety instructions	User Instruction Outdoor Facade Spot
POF	On-Pack-Info	Legal Insert OUTDOOR
POF	Declarations of conformity	EC declararion Outdoor

Pho	otometric and lighting design files	Document name
IES	file (IES)	O Facade Spot 8W3000K WT IP54
LDT	file (Eulumdat)	O Facade Spot 8W3000K WT IP54
UGF	R file (UGR table)	O Facade Spot 8W3000K WT IP54
Ligh	nt distribution curve type cone	O Facade Spot 8W3000K WT IP54
Ligh	nt distribution curve type polar	4058075074712 O Facade Spot 8W3000K GY IP54

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075074736	Folding box 1	124 mm x 154 mm x 166 mm	640.00 g	3.17 dm <sup>3</sup>
4058075074743	Shipping box 6	385 mm x 170 mm x 355 mm	4072.00 g	23.23 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

# References / Links

- For Guarantee see www.ledvance.com/guarantee

### **DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.