


PRODUCT DATASHEET

LED VALUE HE BATTEN 6.50 W 3000 K 600 mm

LED VALUE HE BATTEN | LED batten luminaires with high luminous efficacy

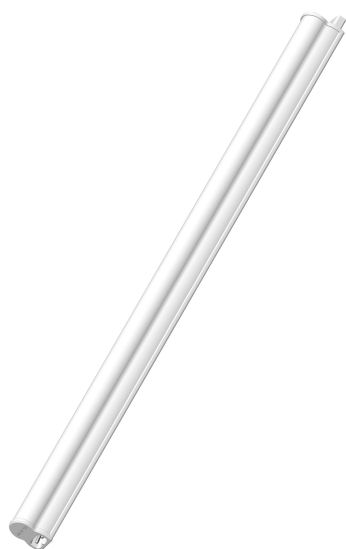

Areas of application

- Contour lighting
- Cove lighting
- Shelf lighting
- Backlighting
- Indoor applications

Product benefits

- Homogeneous light output
- Flexible application due to a wide range of available lengths of 300 to 1200 mm.
- Mercury-free technology

Product features

- Uniform illumination
- Available with color temperature: 3,000 K, 4,000 K, 6,500 K
- Beam angle: 120°
- Connection with 2-pin plug connection
- Lifetime (L70/B50): up to 20,000 h
- High luminous efficacy: up to 100 lm/W
- Power factor: > 0.9
- Certificate: CB




TECHNICAL DATA

Electrical data

Nominal wattage	6.50 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	31.000 mA
Power factor λ	0.90
Protection class	II

Photometrical data


Luminous flux	585 lm
Luminous efficacy	90 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	80
Standard deviation of color matching	≤ 5 sdcn
Beam angle	120 °



LDVAL BAT HE 600 6.5W G3 24X1
EN LEDV - Copy (2)

Dimensions & Weight

Length	585.00 mm
Width	22.20 mm
Height	32.50 mm
Product weight	75.00 g



December 06, 2025, 09:05:49
LED VALUE HE BATTEN 6.50 W 3000 K
600 mm

December 06, 2025, 09:05:49
LED VALUE HE BATTEN 6.50 W 3000 K
600 mm

December 06, 2025, 09:05:49
LED VALUE HE BATTEN 6.50 W 3000 K
600 mm

December 06, 2025, 09:05:49
LED VALUE HE BATTEN 6.50 W 3000 K
600 mm

December 06, 2025, 09:05:49
LED VALUE HE BATTEN 6.50 W 3000 K
600 mm

December 06, 2025, 09:05:49
LED VALUE HE BATTEN 6.50 W 3000 K
600 mm

December 06, 2025, 09:05:49
LED VALUE HE BATTEN 6.50 W 3000 K
600 mm

December 06, 2025, 09:05:49
LED VALUE HE BATTEN 6.50 W 3000 K
600 mm

- December 06, 2025, 09:05:49
LED VALUE HE BATTEN 6.50 W 3000 K
600 mm

DOWNLOAD DATA

Photometric and lighting design files		Document name
	IES file (IES)	LDVAL BAT HE 600 6.5W G3 24X1 EN LEDV - Copy (2)
	Light distribution curve type polar	LDVAL BAT HE 600 6.5W G3 24X1 EN LEDV - Copy (2)

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075414426	Folding box 1	650 mm x 23 mm x 34 mm	120.00 g	0.50 dm³
4058075414433	Shipping box 24	665 mm x 150 mm x 150 mm	3354.00 g	14.96 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.