

# PRODUCT DATASHEET

## DOT-it CLASSIC CLASSIC SI

DOT-it® | Little helpers



### Areas of application

- For indoor use only
- Nightlight
- Wardrobes
- Kitchens

### Product benefits

- Attractive and functional design
- Can easily be moved to where light is needed thanks to battery operation
- Economical operation due to low power consumption
- Accessories for flexible mounting options included

### Product features

- ON/OFF via Touch DIM



---

## TECHNICAL DATA

### Electrical data


Nominal wattage	0.23W
Nominal voltage	4,5 V
Mains frequency	0 Hz
Max. number of luminaires per miniature circuit breaker C10	-
Protection class	III
Operating mode	Battery

### Photometrical data

Luminous flux	10 lm
Luminous efficacy	43 lm/W
Color temperature	7000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Beam angle	70 °

### Dimensions & Weight

Diameter	68.00 mm
Width	67 mm
Height	22.00 mm
Product weight	83.00 g

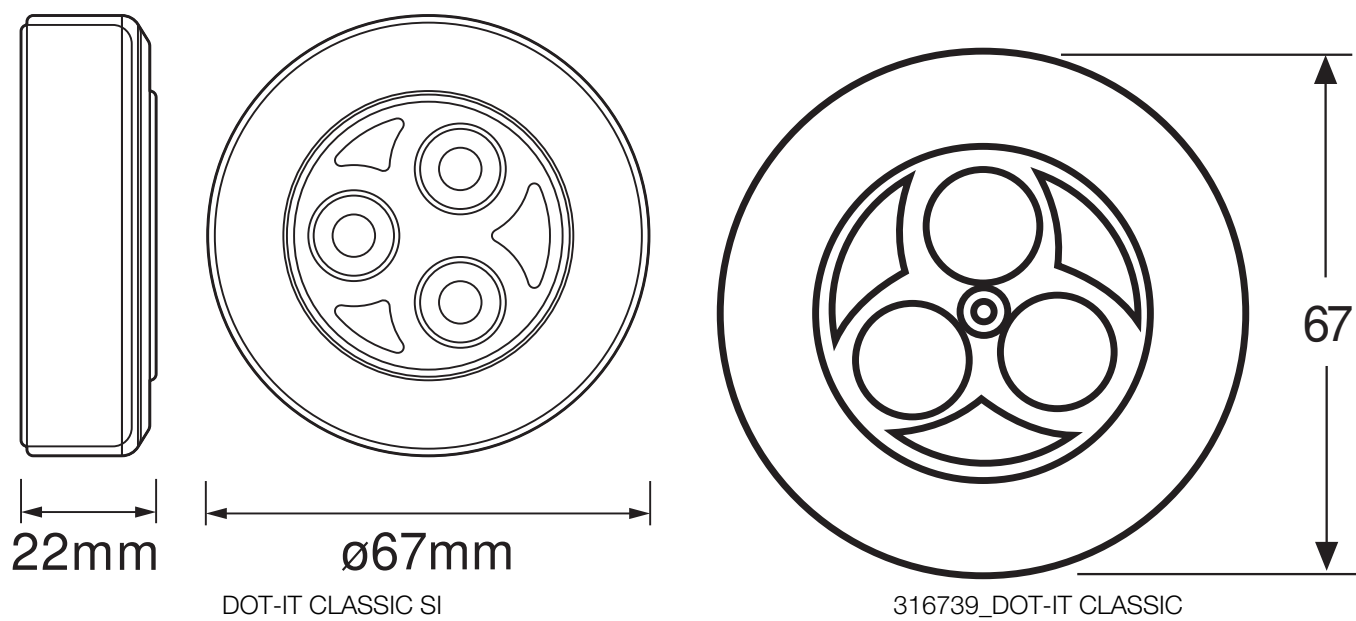

Materials & Colors

Product color	Silver
Housing color	Silver
Body material	Acrylonitrile butadiene styrene (ABS)
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+30 °C
Type of protection	IP20
Dimmable	No
Mounting type	Surface
Mounting location	Wall
Application environment	Indoor
Adjustable	No
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	20000 h <sup>1)</sup>
---------------------------	-----------------------

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

## BATTERY

Type of Battery	Alkaline
Battery size [GMS]	AAA
Number of included batteries	3
Nominal voltage of battery	1.5 V

## Certificates &amp; Standards

Standards	CE / UKCA
Replaceable light source (EPREL)	Not replaceable


## EQUIPMENT / ACCESSORIES

- 3 AAA batteries included
- Complete mounting and connecting accessories included

## Safety advice

- This product is not a toy. It should not be left unattended in the hands of children or operated by children.
- Not designed as a replacement for conventional lighting in private household.
- Battery Warning: Keep out of reach for children. Swallowing can lead to chemical burns, perforation of soft tissue, and death. Severe burns can occur within 2 hours of ingestion. Seek medical attention immediately.
- If the battery compartment (if applicable) does not close securely, stop using the product and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- Please avoid: Maximal ambient temperature: +35 °C. Replacement of a battery with an incorrect type that can defeat safeguard (for example, in the case of some lithium battery types). Altitude during operation: 2000 m. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

## DOWNLOAD DATA

Documents and certificates	Document name
 Declarations of conformity	CE Declaration DOT-It

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075227804	Blister 1	31 mm x 140 mm x 120 mm	92.00 g	0.52 dm <sup>3</sup>
4058075227811	Shipping box 6	286 mm x 75 mm x 130 mm	627.00 g	2.79 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products.

When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.