


PRODUCT DATASHEET

TruWave® Filament Selectable G25 5W DIM 5CCT 2PK

SYLVANIA TruWave® 5CCT Selectable Filament Lamps | TruWave 5CCT Filament lamps control blue light for lower glare and less eye strain

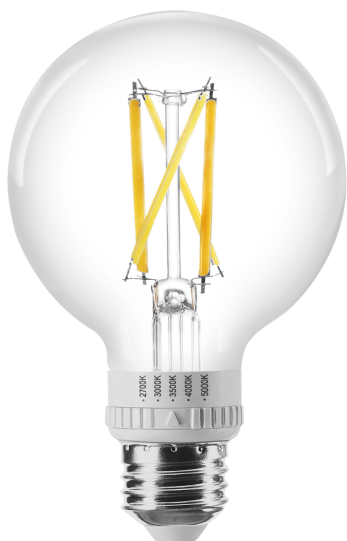

Areas of application

- Downlights, pendant fixtures, table lamps, wall sconces
- Healthcare, hospitality, residential, retail

Product features

- Selectable CCTs: 2700/3000/3500/4000/5000K
- Toggle switch located on the lamp to change between CCTs in the field
- California Title 20
- Controls blue wavelengths for lower glare and reduced eye strain to improve readability
- Supports an improved sleep-wake cycle
- Clean light color rendering for seeing realistic, vivid colors
- 15,000 hours lifetime (L70)
- 5-year limited warranty
- Dimmable down to 10 %
- Exceptional color quality without the loss of efficacy
- Properly saturates red to make colors accurate and vibrant
- CRI > 90

TECHNICAL DATA

Electrical data

| | |
|----------------------------------------|--------|
| Nominal wattage | 5 W |
| Construction wattage | 5.00 W |
| Nominal voltage | 120 V |
| Claimed equiv. conventional lamp power | 60 W |

Photometrical data

| | |
|--------------------------|----------|
| Luminous flux | 500 lm |
| Luminous efficacy | 100 lm/W |
| Color temperature | 2700 K |
| Color rendering index Ra | ≥90 |
| Light color | 927 |

Dimensions & Weight

| | |
|----------------|-----------|
| Overall length | 126.00 mm |
| Diameter | 80.00 mm |
| Product weight | 50.00 g |

Additional product data

| | |
|-----------------------------|--------|
| Base (standard designation) | E26 |
| Mercury content | 0.0 mg |
| NAED | 42271 |

Capabilities

| | |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

Country-specific categorizations

| | |
|-----------------|----------------|
| Order reference | CL 5W 120V 4X2 |
|-----------------|----------------|


Energy labelling regulation data acc EU 2019/2015


| | |
|-----------------------------------------------------|-----------|
| Light source cap-type (or other electric interface) | E26 |
| Length | 126.00 mm |
| Height | 80.00 mm |
| Width | 80.00 mm |

Safety advice

- Suitable for use in dry and damp locations.
- -4°F to +104°F (-20°C to +40°C)

DOWNLOAD DATA

| Spec Sheets and Product Documents | | Document name |
|-----------------------------------------------------------------------------------|------------------------------|------------------------------|
|  | Product information bulletin | LED TruWave Selectable Lamps |

| Photometric and lighting design files | | Document name |
|-----------------------------------------------------------------------------------|-----------------------------|-------------------------------------------------------------------------|
|  | IES files (IES, additional) | LED G25 5W 500 Lumens 2700/3000/3500/4000/5000K TruWave 5CCT Selectable |

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 0046135422713 | Folding box 2 | 83 mm x 162 mm x 143 mm | 160.00 g | 1.92 dm ³ |
| 4058118298853 | Shipping box 8 | 371 mm x 187 mm x 162 mm | 841.00 g | 11.24 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.