

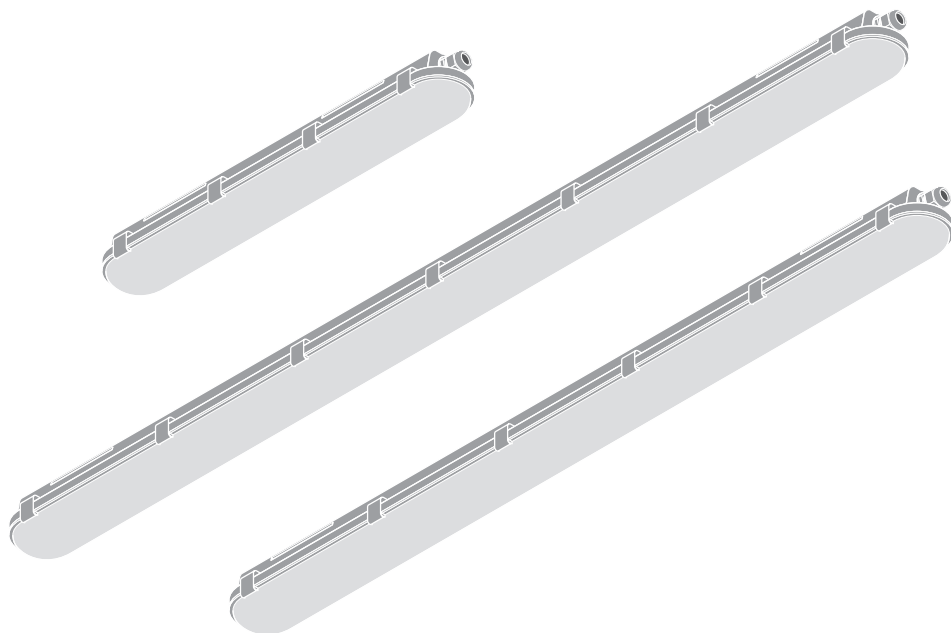
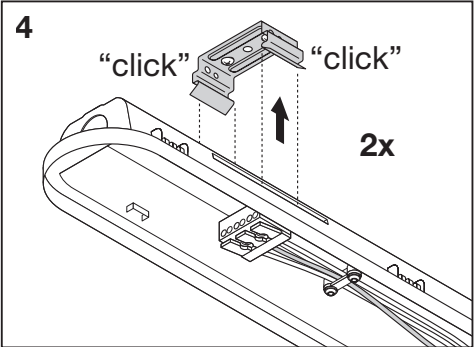


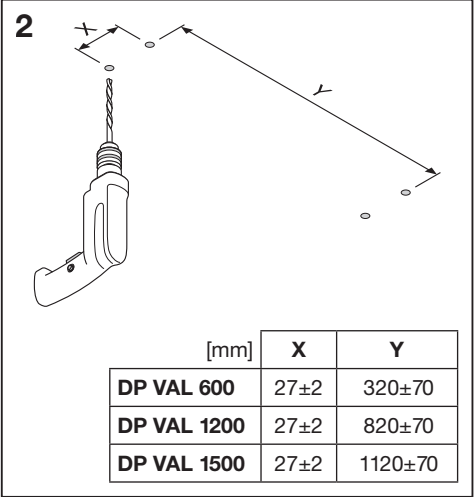
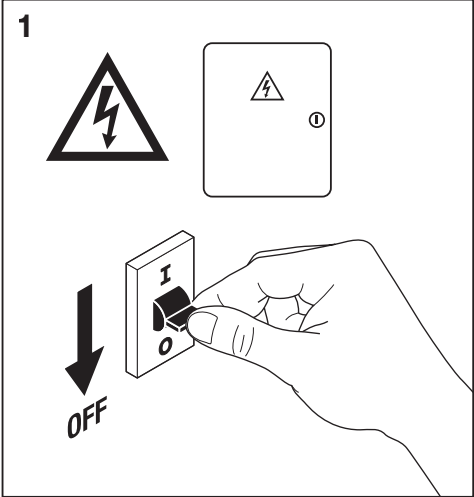








DAMPPROOF VALUE IP65





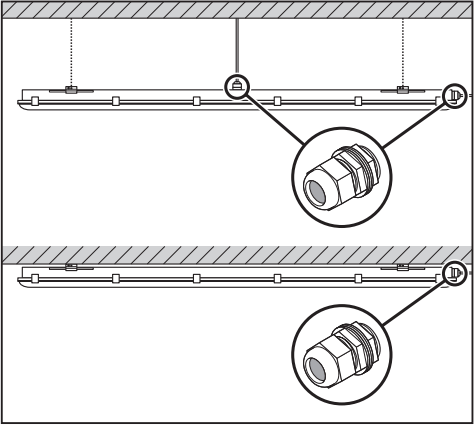


	EAN	lxwxh [mm]	W	VAC	Hz	lm	lm/W	K
DP VAL 600 9W/4000K IP65	4058075300705	600 x 77 x 68	9	220-240	50/60	1080	120	4000
DP VAL 600 18W/4000K IP65	4058075300743	600 x 77 x 68	18	220-240	50/60	2160	120	4000
DP VAL 1200 20W/4000K IP65	4058075300781	1200 x 77 x 68	20	220-240	50/60	2400	120	4000
DP VAL 1200 40W/4000K IP65	4058075300828	1200 x 77 x 68	40	220-240	50/60	4800	120	4000
DP VAL 1500 25W/4000K IP65	4058075300866	1500 x 77 x 68	25	220-240	50/60	3000	120	4000
DP VAL 1500 50W/4000K IP65	4058075300903	1500 x 77 x 68	50	220-240	50/60	6000	120	4000

	EAN	IP	IK	∇	R _a	° (°C)	PF	👤
DP VAL 600 9W/4000K IP65	4058075300705	65	08	115°	>80	-20...+40	>0.9	0.7 kg
DP VAL 600 18W/4000K IP65	4058075300743	65	08	115°	>80	-20...+40	>0.9	0.7 kg
DP VAL 1200 20W/4000K IP65	4058075300781	65	08	115°	>80	-20...+40	>0.9	1.5 kg
DP VAL 1200 40W/4000K IP65	4058075300828	65	08	115°	>80	-20...+40	>0.9	1.5 kg
DP VAL 1500 25W/4000K IP65	4058075300866	65	08	115°	>80	-20...+40	>0.9	2.0 kg
DP VAL 1500 50W/4000K IP65	4058075300903	65	08	115°	>80	-20...+40	>0.9	2.0 kg

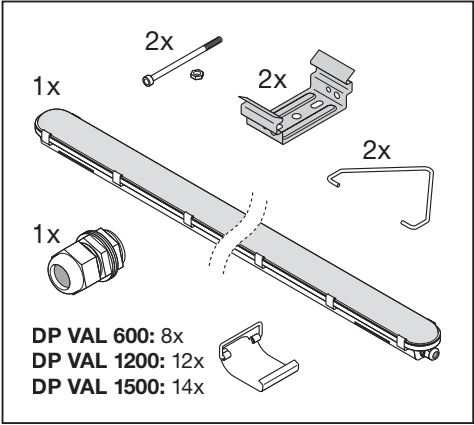

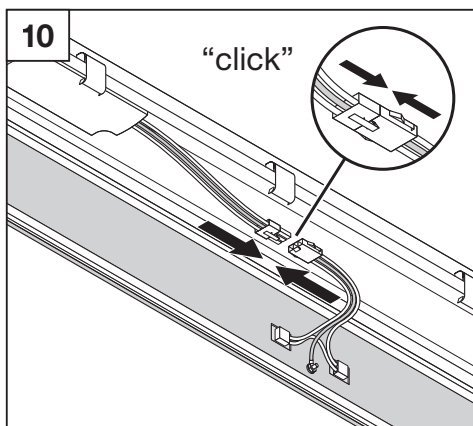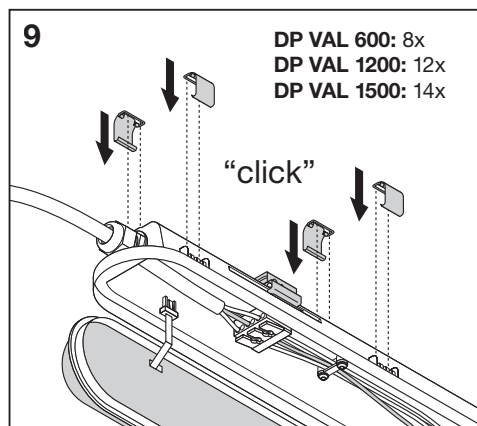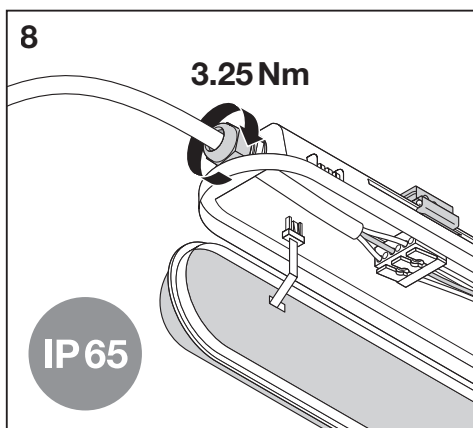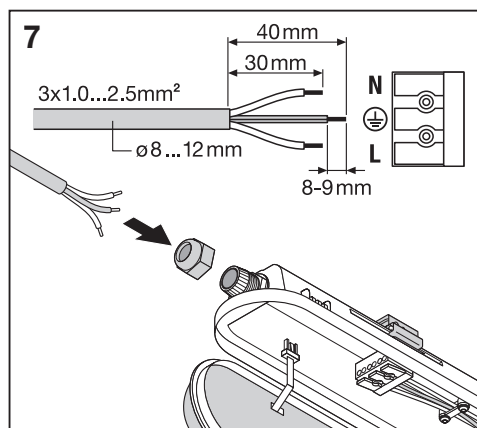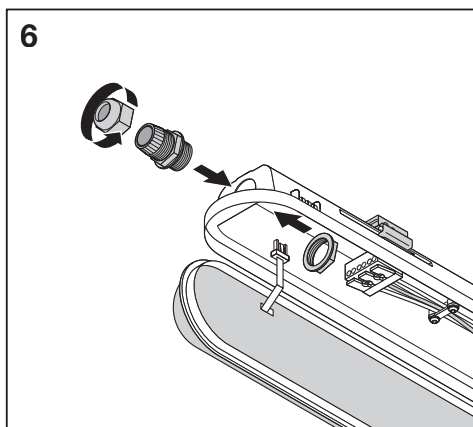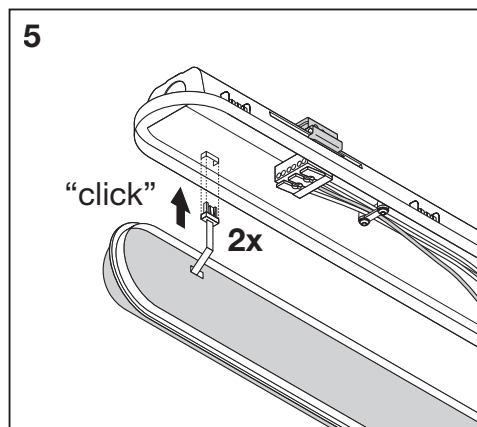

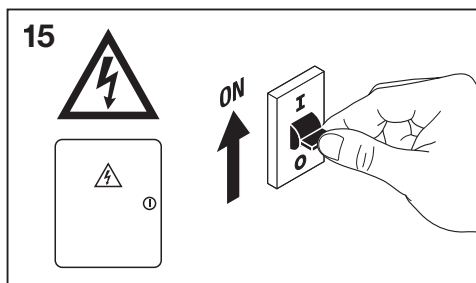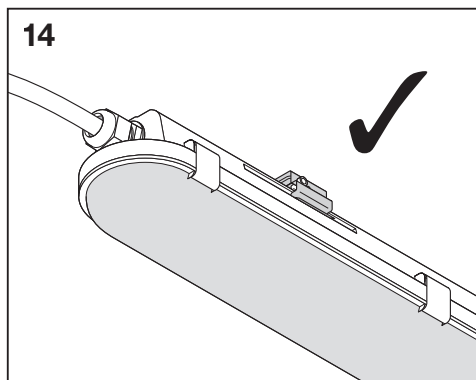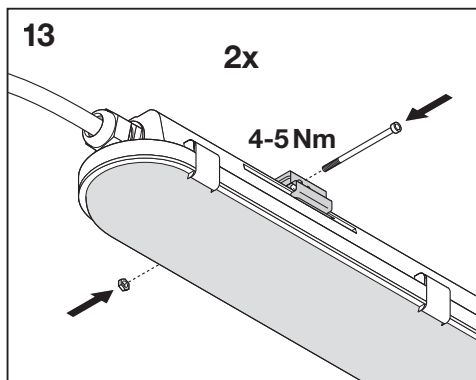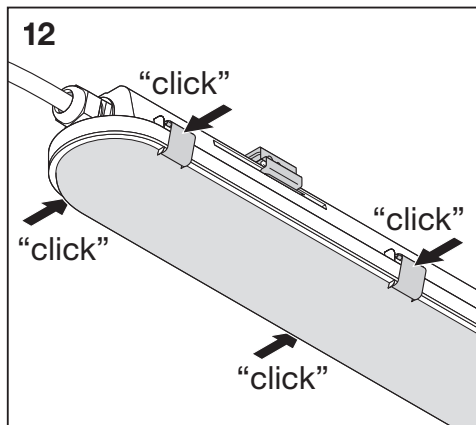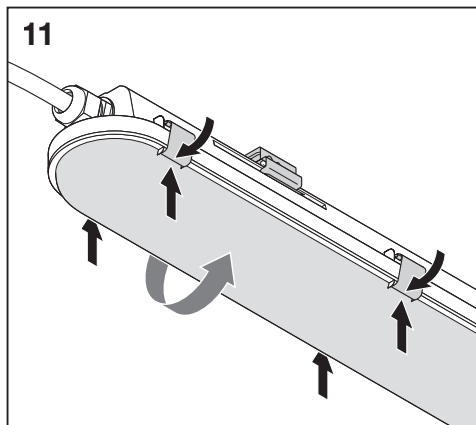

n	B16	C10	C16
DP VAL 600 9W	60	48	76
DP VAL 600 18W	53	42	68
DP VAL 1200 20W	62	50	80
DP VAL 1200 40W	43	34	54
DP VAL 1500 25W	55	43	69
DP VAL 1500 50W	27	23	37

CE EAC

RoHS



C10449057
G11073180V2
23.11.20



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com