

# PRODUCT DATASHEET

## LB FLEX 1200 DALI P 73W 840 OV

LOW BAY FLEX 1200 DALI | Low-bay luminaires with attractive linear design, up to 155 lm/W with DALI-2 technology



### Areas of application

- Replacement for luminaires with mercury vapor or metal halide lamps
- Warehouses
- Logistics halls
- Industrial and storage facilities
- Discounters, supermarkets
- Sports halls
- Indoor sports facilities

### Product benefits

- High compatibility thanks to DALI-2 certification
- Economical thanks to high luminous efficacy up to 155 lm/W
- Easy and quick installation thanks to toolless connector box with 5- and 7-pole terminals
- Modern and robust design
- 5 years guarantee

### Product features

- DALI-2 certified
- Different luminous flux and beam angle for mounting heights of ~ 4 m to ~10 m in 4000 K
- Through-wiring cable already installed
- Long Lifetime (L80/B10): up to 100,000 h
- High color consistency:  $\leq 3$  SDCM




## TECHNICAL DATA

### Electrical data


Nominal wattage	73 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	320 mA
Inrush current	17.3 A
Inrush current time $T_{h50}$	164 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	27
Max. number of luminaires per miniature circuit breaker C10	36
Max. number of luminaires per miniature circuit breaker C16	36
Power factor $\lambda$	$\geq 0.90$
Total harmonic distortion	$\leq 20$ %
Protection class	I
Operating mode	Electronic control gear (ECG)
Dimming interface	DALI-2

### Photometrical data

Luminous flux	11315 lm
Luminous efficacy	155 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	< 3 sdc <sub>m</sub>
Low flicker	Yes
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG1
Beam angle	40 ° x 90 °

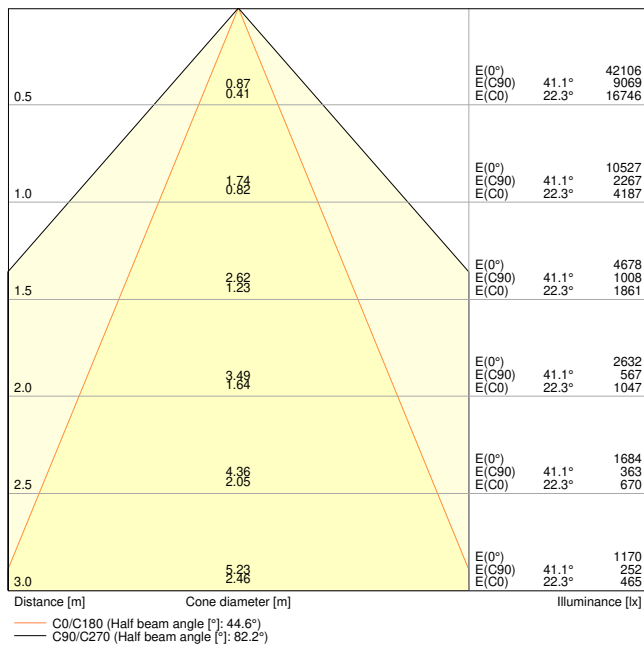


LB FLEX 1200 DALI P 73W 840 OV

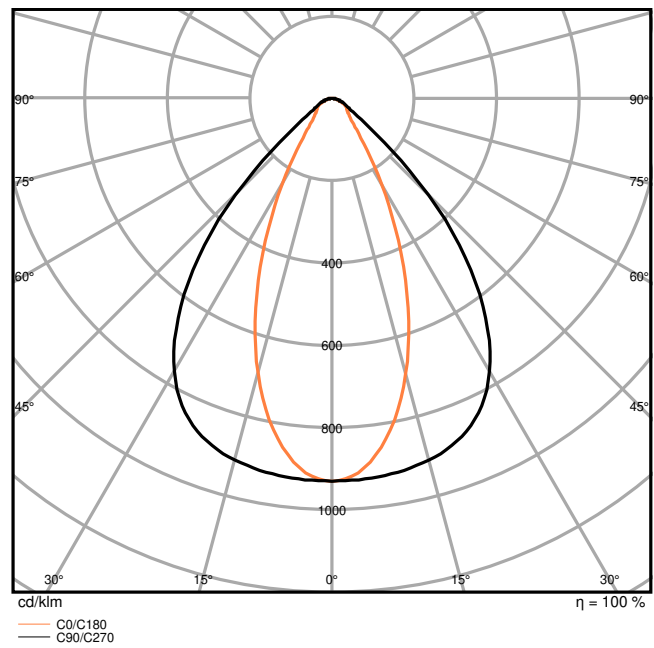

LB FLEX 1200 DALI P 73W 840 OV

Dimensions & Weight

Length	1236.00 mm
Width	115.00 mm
Height	65.00 mm
Product weight	3300.00 g



LOW BAY FLEX 1200

Materials & Colors

Product color	White
Housing color	White
Body material	Steel
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-25...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	SCREWLESS TERMINAL, 7-POLE (L1, L2, L3, N, PE, DA, DA)
Type of protection	IP23
Protection class IK (shock resistance)	IK08
Dimmable	Yes
Type of dimming	DALI2
Mounting type	Surface/Suspended
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	100000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	100000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	100000 h
Lifespan L90/B10 at 25 °C	83000 h
Number of switching cycles	50000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

Output current	310 mA
ECG - Output ripple current	< 10 %
Recommended control gear	TRIDONIC/LCA 50W 100-400mA one4all Ip PRE

### Emergency lighting

Wattage in emergency operation mode	14.7 W
Luminous flux in emergency operation mode	1787 lm

### Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / EAC / UKCA
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable









### Additional product data









Added function	VIVARES
----------------	---------

### EQUIPMENT / ACCESSORIES

– Suspension kit, ball-proof cover and angulation mounting kit available as separate accessory

### DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	UI Lowbay Flex
	Legal information	Legal Insert LB FLEX DALI
	Legal information	LS Insert LB FLEX DALI
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	LB FLEX
	Declarations of conformity UKCA	LB FLEX
Photometric and lighting design files		Document name
	IES file (IES)	LB FLEX 1200 DALI P 73W 840 OV
	LDT file (Eulumdat)	LB FLEX 1200 DALI P 73W 840 OV




Photometric and lighting design files		Document name
	ULD file (DIALux)	LB FLEX 1200 DALI P 73W 840 OV
	ROLF file (RELUX)	LB FLEX 1200 DALI P 73W 840 OV
	UGR file (UGR table)	LB FLEX 1200 DALI P 73W 840 OV
	Light distribution curve type cone	LB FLEX 1200 DALI P 73W 840 OV
	Light distribution curve type polar	LB FLEX 1200 DALI P 73W 840 OV
CAD/BIM files		Document name
	BIM Revit 3D	LOW BAY FLEX
	CAD STEP 3D	LB FLEX 1200
Tender texts		Document name
	Tender documents	LOW BAY FLEX 1200 DALI DALI P 73W 840 OV-EN

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854164224	Folding box 1	106 mm x 1,282 mm x 154 mm	3688.00 g	20.93 dm <sup>3</sup>
4099854164231	Shipping box 3	1,312 mm x 488 mm x 143 mm	13163.00 g	91.56 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**ADDITIONAL CATALOG INFORMATION**



### References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.