

PRODUCT DATASHEET

LN INV DI 1200 P 55W 930 PS BK

LINEAR INDIVILED DIRECT/INDIRECT 1200 PS | Pendant luminaire for single or light line office application with CRI90 and power select (PS) feature, 1200 mm



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct and indirect lighting

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- Pendant luminaires with direct light emission (70%) and indirect light emission (30%)
- High performance with CRI90 and up to 133 lm/W
- Highly versatile due to selectable power steps (Power Select - PS) on the driver
- High color consistency with SDCM 3
- Easy installation
- Low flicker light thanks to special electronic control gear
- Multiple mounting options thanks to different accessories

Product features

- Minimalistic LEDVANCE SCALE design in extruded aluminum housing, available in white and black color
- Includes EVERLOOP: Convenient replacement of light source and LED driver
- Linkable into seamless light line with accessories (surface or pendant mounting)



- Pendant mounting with suspension kit (to be ordered separately)
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Lifetime (L80/B10): 70,000 h (at 25 °C)

TECHNICAL DATA

Electrical data

Nominal wattage	55 W / 49 W / 43 W / 35 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	255...227...197...167 mA
Inrush current	15.4 A
Inrush current time T_{h50}	80 μ s
Max. number of luminaires per miniature circuit breaker B16	47
Max. number of luminaires per miniature circuit breaker C10	29
Max. number of luminaires per miniature circuit breaker C16	47
Power factor λ	> 0.90
Total harmonic distortion	\leq 20 %
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	6650 lm / 5900 lm / 5250 lm / 4350 lm
Luminous efficacy	121 lm/W / 120 lm/W / 122 lm/W / 124 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	\geq 90
Standard deviation of color matching	3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	\leq 1
Stroboscope effect metric (SVM)	\leq 0.4
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 ° + 130 °
UGR	< 19
1	


Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
55 W	3000 K	6650 lm	121 lm/W

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
49 W	3000 K	5900 lm	120 lm/W
43 W	3000 K	5250 lm	122 lm/W
35 W	3000 K	4350 lm	124 lm/W

Dimensions & Weight

Length	1210.00 mm
Width	125.00 mm
Height	43.00 mm
Product weight	3700.00 g

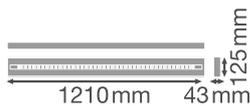

LN INV 1200 P

Materials & Colors

Product color	Black
Housing color	Black
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal
Type of protection	IP20

Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Suspended
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	70000 h ¹⁾
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	1100mA / 950mA / 850mA / 700 mA
ECG - Output ripple current	≤ 5 %
Recommended control gear	OSRAM type IT FIT 40/220-240/800 CS L& IT FIT 18/220-240/350 CS L

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00026-V01.01-EN
Replaceable light source (EPREL)	By the end consumer

Additional product data

Number of illuminants	2
Added function	EVERLOOP / MULTI SELECT

Accessories Mandatory

Product image	Product name	EAN
	LN INV SUSPENSION KIT BK	4099854297069
	LN INV SUSPENSION WIRE	4099854323980

Accessories Optional

Product image	Product name	EAN
	LN INV 1200 THROUGHWIRING KIT	4099854214820
	LN INV INLINE CONNECTOR	4099854215612
	LN INV CORNER CONNECTOR BK	4099854308079
	LN INV INFILL 600 BK	4099854297045
	LN INV INFILL 1200 BK	4099854297007
	LN INV INFILL 1500 BK	4099854297021

EQUIPMENT / ACCESSORIES

- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	LN INV
	Legal information	Safety Insert G11205497
	Legal information	Legal Insert G11235609
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	LN INV D DI
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
	Certificates	LN INV
Photometric and lighting design files		Document name
	IES file (IES)	LN INV DI 1200 P 55W 930 PS BK 1100mA
	LDT file (Eulumdat)	LN INV DI 1200 P 55W 930 PS BK 1100mA
	ULD file (DIALux)	LN INV DI 1200 P 55W 930 PS BK
	ROLF file (RELUX)	LN INV DI 1200 P 55W 930 PS BK
	UGR file (UGR table)	LN INV DI 1200 P 55W 930 PS BK 1100mA
	Light distribution curve type cone	LN INV DI 1200 P 55W 930 PS BK 1100mA
	Light distribution curve type polar	LN INV DI 1200 P 55W 930 PS BK 1100mA

CAD/BIM files		Document name
	BIM Revit 3D	Linear Indiviled G2
	CAD STEP 3D	LN INV D I 1200 G2

Tender texts		Document name
	Tender documents	LINEAR INDIVILED DIRECT INDIRECT 1200 PS 1200 P 55W 930 PS BK-EN



LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854296888	Folding box 1	178 mm x 1,263 mm x 103 mm	4300.00 g	23.16 dm ³
4099854296895	Shipping box 2	1,297 mm x 197 mm x 224 mm	10000.00 g	57.23 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

Product Code	Product Name	Power (W)	Length (mm)	Width (mm)	Height (mm)	Weight (g)	Volume (dm ³)
4099854296888	Linear Indiviled G2	55	1200	178	103	4300	23.16
4099854296895	Linear Indiviled G2	55	1200	178	103	4300	23.16

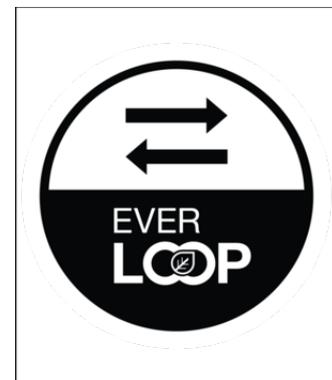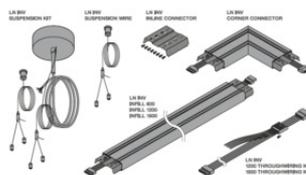

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.