


PRODUCT DATASHEET

DP MAX 600 S 25W 840 VW IP69

DAMP PROOF MAX | Tubular damp-proof luminaires with extra high IP and IK protection

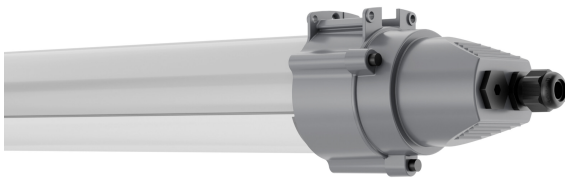

SUPERIOR
CLASS

Areas of application

- Food industry
- Open car parks and underpasses
- Car wash facilities
- Outdoor applications
- Industrial and storage facilities
- Workshops, assembly lines
- Passages, underpasses
- Parking garages

Product benefits

- Uniform light distribution
- Flexible application through a wide range of beam angles
- Versatile applications due to resistance to many chemicals and UV light
- Easy to clean, even at high temperatures with a high-pressure cleaner
- Energy savings up to 68 % (compared to luminaires that use fluorescent lamps)
- Low flicker ≤ 5 %

Product features

- High luminous efficacy: up to 158 lm/W
- Lifetime (L80/B50): up to 100,000 h (at 35 °C)
- Type of protection: IP66, IP69 (80 °C)
- Impact resistance: IK10
- Ammonia resistant
- UV-resistant PMMA diffuser
- Compatible to Zhaga Book 7 LED light sources




TECHNICAL DATA**Electrical data**


Nominal wattage	25.00 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	110 mA
Inrush current	41 A
Inrush current time T_{h50}	124 μ s
Max. number of luminaires per miniature circuit breaker B16	26
Max. number of luminaires per miniature circuit breaker C10	26
Max. number of luminaires per miniature circuit breaker C16	43
Power factor λ	≥ 0.87
Total harmonic distortion	15 %
Protection class	I
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	3500 lm
Total luminous flux of contained light sources	3880 lm
Luminous efficacy	140 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	≤ 1
Stroboscope effect metric (SVM)	≤ 0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	133 ° x 107 °
UGR	< 25

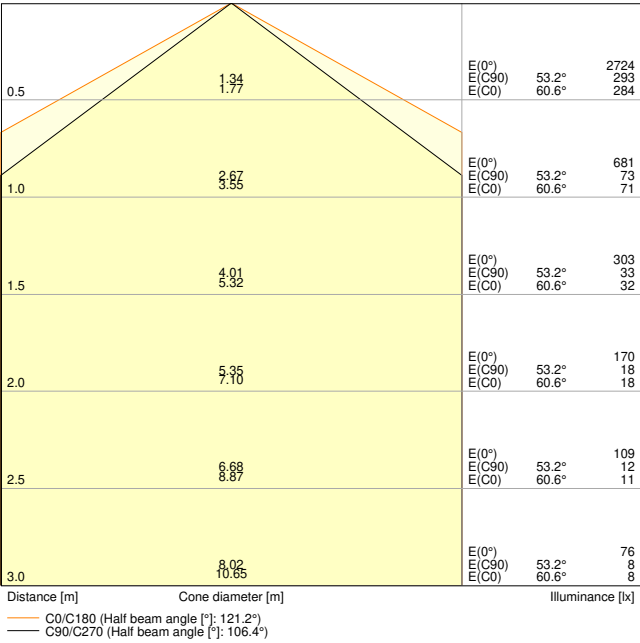


DP MAX 600 S 25W 840 IP69

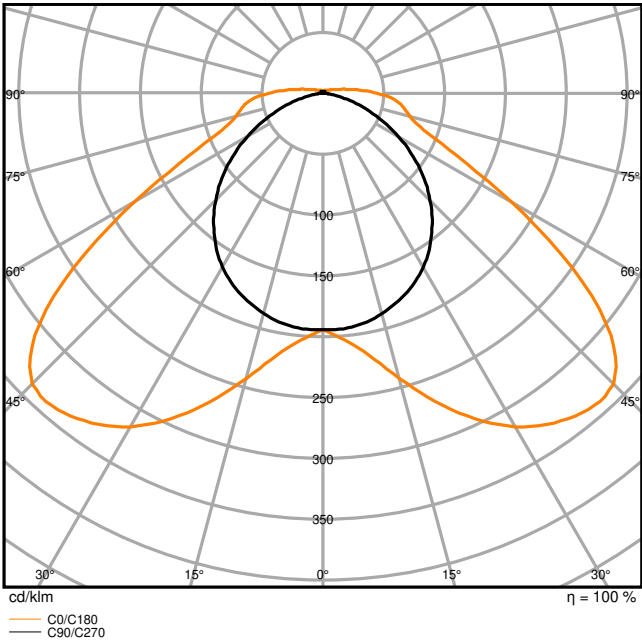

DP MAX 600 S 25W 840 IP69

Dimensions & Weight

Length	885.00 mm
Width	125.00 mm
Height	138.00 mm
Product weight	3000.00 g



DP MAX 600 840

Materials & Colors

Product color	Gray
Housing color	Gray
Body material	Polymethylmethacrylate (PMMA)
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-25...+45 °C
Temperature range at storage	-40...+45 °C
Type of connection	Screwless terminal, 3-Pole
Type of protection	IP66/IP69K
Protection class IK (shock resistance)	IK10
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Ceiling / Wall
Application environment	Outdoor
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	75000 h ¹⁾
Lifespan L80/B10 at 25 °C	75000 h ¹⁾
Lifespan L80/B50 at 25 °C	75000 h
Number of switching cycles	> 200000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L80 / B50 @ 35 °C (Ta)

Control gear

Output current	125...550 mA
ECG - Output ripple current	< 1 %
Recommended control gear	OT FIT 75/220-240/550 D NFC L



Emergency lighting

Type of Emergency Lighting (EL)	EL certified driver (0Hz / DC operation) for central battery operation included
Type of emergency operation test	None

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	Yes
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

Accessories Optional

Product image	Product name	EAN
	DP MAX MOUNTING BRACKET CLAMPS V4A	4099854583360
	DP MAX MOUNTING TUBE CLAMPS V4A	4099854583384





EQUIPMENT / ACCESSORIES











- Stainless steel clamps and M25 cable gland included

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	DAMP PROOF MAX
	Legal information	Safety Insert G11205497
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	DP MAX

Documents and certificates		Document name
	Legal information	Legal insert G11231557
	Declarations of conformity	DP MAX
	Declarations of conformity UKCA	DP MAX
Photometric and lighting design files		Document name
	IES file (IES)	DP MAX 600 S 25W 840 IP69
	LDT file (Eulumdat)	DP MAX 600 S 25W 840 IP69
	UGR file (UGR table)	DP MAX 600 S 25W 840 IP69
	Light distribution curve type cone	DP MAX 600 S 25W 840 IP69
	Light distribution curve type polar	DP MAX 600 S 25W 840 IP69
CAD/BIM files		Document name
	CAD STEP 3D	DP MAX 600
Tender texts		Document name
	Tender documents	DAMP PROOF MAX 600 S 25W 840 VW IP69-en


LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075849792	Shipping box 1	1,016 mm x 165 mm x 146 mm	3763.00 g	24.48 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION





References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.