

PRODUCT DATASHEET

LN INV D 1500 P 52W 940 PS EL BK

LINEAR INDIVILED DIRECT 1500 EMERGENCY | Surface mounted luminaire for single or light line office application with CRI90, power select (PS) feature and emergency battery, 1500 mm



Areas of application

- Emergency illumination of escape routes
- Buildings requiring up to 3 h emergency light operation
- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct lighting



Product benefits

- Seamless integration of luminaires with emergency lighting function into general lighting
- Operation of integrated emergency lighting function with long life LiFePO4 battery with 3h battery discharge time
- Simple testing of luminaires with emergency lighting function thanks to integrated automatic test function
- Convenient visualization of results of automatic test with an included control LED
- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90 and up to 130 lm/W
- Highly versatile due to selectable power steps (Power Select - PS) on the driver
- High color consistency with SDCM 3
- Multiple mounting options thanks to different accessories

Product features

- Certified according to European norms (EN 60598-2-22)
- Luminaire suitable for normal lighting and emergency lighting



- Emergency lighting function: battery discharge time of 3 h
- Function test of emergency lighting: automatic (AT)
- Battery technology: LiFePO₄
- Includes EVERLOOP: Convenient replacement of light source and LED driver
- Linkable into seamless light line with accessories (surface or pendant mounting)
- Pendant mounting with suspension kit (to be ordered separately)
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Lifetime (L80/B10): 70,000 h (at 25 °C)


TECHNICAL DATA

Electrical data


Nominal wattage	52 W / 48 W / 46 W / 40 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	240mA / 220mA / 205mA / 185 mA
Inrush current	14.6 A
Inrush current time T_{h50}	170 μ s
Max. number of luminaires per miniature circuit breaker B16	28
Max. number of luminaires per miniature circuit breaker C10	23
Max. number of luminaires per miniature circuit breaker C16	38
Power factor λ	> 0.90
Total harmonic distortion	$\leq$ 20 %
Protection class	I
Surge capability (L-N)	1000 V
Surge capability (L/N-Ground)	2000 V
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	6350 lm / 5900 lm / 5700 lm / 5050 lm
Luminous efficacy	122 lm/W / 123 lm/W / 124 lm/W / 126 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	$\geq$ 90
Standard deviation of color matching	3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	$\leq$ 1
Stroboscope effect metric (SVM)	$\leq$ 0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	90 °
UGR	< 19

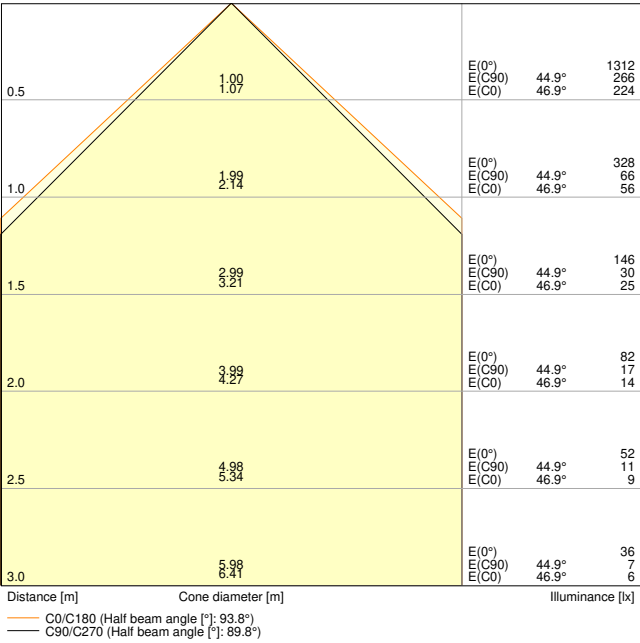

LN INV D 1500 P 52W 940 EM BK

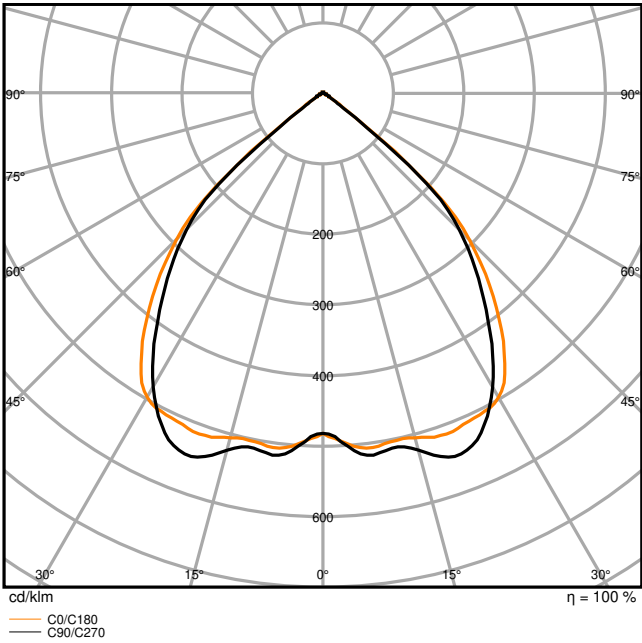


LN INV D 1500 P 52W 940 EM BK

Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
52 W	4000 K	6350 lm	122 lm/W
48 W	4000 K	5900 lm	123 lm/W
46 W	4000 K	5700 lm	124 lm/W
40 W	4000 K	5050 lm	126 lm/W

Dimensions & Weight

Length	1475.00 mm
Width	125.00 mm
Height	43.00 mm
Product weight	4100.00 g



LN INV 1500 P

Materials & Colors

Product color	Black
Housing color	Black
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	0...+40 °C
Temperature range at storage	-25...+25 °C
Type of connection	Screwless terminal
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
---------------------------	------------------------

Lifespan L80/B10 at 25 °C	70000 h ¹⁾
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	1050mA / 975mA / 900mA / 800 mA
ECG - Output ripple current	≤ 5 %
Recommended control gear	OSRAM OT FIT 55/220–240/1A0 CS L AP

BATTERY

Type of Battery	LiFePO4
Battery size [GMS]	Others
Nominal voltage of battery	3.2 V
Nominal capacity of battery	4500 mAh
Battery charging time	24 h

Emergency lighting

Type of Emergency Lighting (EL)	EL unit (battery and controller) for decentral operation included
Area of emergency application	Anti-panic lighting / Escape route lighting
Type of emergency light operation	Non-maintained / Maintained
Type of emergency operation test	Automatic
Wattage in emergency operation mode	2.3 W
Luminous flux in emergency operation mode	400 lm
Battery life in emergency operation mode	3 h


Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	By the end consumer

Additional product data

Number of illuminants	1
Added function	EVERLOOP / MULTI SELECT

Accessories Optional

Product image	Product name	EAN
	LN INV SUSPENSION KIT BK	4099854297069
	LN INV SUSPENSION WIRE	4099854323980
	LN INV 1500 THROUGHWIRING KIT	4099854214806
	LN INV INLINE CONNECTOR	4099854215612
	LN INV CORNER CONNECTOR BK	4099854308079
	LN INV INFILL 600 BK	4099854297045
	LN INV INFILL 1200 BK	4099854297007
	LN INV INFILL 1500 BK	4099854297021

EQUIPMENT / ACCESSORIES

- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	LN INV D/DI 1200/1500 P PS EL
	Legal information	Safety Insert G11205497
	Legal information	Legal Insert G11235609
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	LN IND EM
	Declarations of conformity	CE declaration LN INV D P PS EL
	Declarations of conformity UKCA	UKCA declaration LN INV D P PS EL
Photometric and lighting design files		Document name
	IES file (IES)	LN INV D 1500 P 52W 940 EM BK
	IES file (IES)	LN INV D 1500 P 52W 940 EM BK
	LDT file (Eulumdat)	LN INV D 1500 P 52W 940 EM BK
	UGR file (UGR table)	LN INV D 1500 P 52W 940 EM BK
	Light distribution curve type cone	LN INV D 1500 P 52W 940 EM BK
	Light distribution curve type polar	LN INV D 1500 P 52W 940 EM BK
CAD/BIM files		Document name
	CAD STEP 3D	LN INV D 1500 G2

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854297755	Folding box 1	177 mm x 1,530 mm x 102 mm	4660.00 g	27.62 dm ³
4099854297762	Shipping box 2	1,550 mm x 197 mm x 224 mm	10920.00 g	68.40 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION




LN INV D 1500 P 52W 940 PS EL BK	OSRAM DT DT T8W C5 L AP V3.2	OFF	OFF	-	930	40	4100	118
		OFF	ON	-	930	40	5300	110
		ON	OFF	-	930	40	5300	110
		ON	ON	Power	1500	52	5900	110
LN INV D 1500 P 52W 940 PS EL WT	OSRAM DT DT S8W C5 L AP V3.2	OFF	OFF	-	930	40	4900	121
		OFF	ON	-	930	40	5400	118
		ON	OFF	-	930	40	5400	118
		ON	ON	Power	1500	52	6000	118
LN INV D 1500 P 52W 940 PS EL BK	OSRAM DT DT T8W C5 L AP V3.2	OFF	OFF	-	930	40	5000	126
		OFF	ON	-	930	40	5700	124
		ON	OFF	-	930	40	5700	124
		ON	ON	Power	1500	52	6300	122
LN INV D 1500 P 52W 940 PS EL WT	OSRAM DT DT S8W C5 L AP V3.2	OFF	OFF	-	930	40	5200	130
		OFF	ON	-	930	40	5900	128
		ON	OFF	-	930	40	5900	127
		ON	ON	Power	1500	52	6500	129

	BATTERY IN	TEST ¹⁾	TEST ¹⁾	MAINTENANCE ²⁾	NON-MAINTENANCE ²⁾
LINEAR INDULED ³⁾ BK	LiFePO ₄ - 2h	automatic ¹⁾	2.3	400	② Maintained/Non-maintained ②
LINEAR INDULED ³⁾ WT	LiFePO ₄ - 2h	automatic ¹⁾	2.3	440	② Maintained/Non-maintained ②

Testing Instructions¹⁾

Control LED ¹²⁾	Luminaire Status ¹³⁾		Control LED ¹³⁾	
	Normal ¹⁴⁾	Emergency ¹⁵⁾	Green ¹⁶⁾	Red ¹⁶⁾
Testing ¹⁵⁾	Green ¹⁶⁾	Green ¹⁶⁾	① 1s, 1s, 1s ...	② 1s, 1s, 1s ...
	Green ¹⁶⁾	Green ¹⁶⁾	③ 1s, 0.1s, 0.1s ...	④ 1s, 0.1s, 0.1s ...
Load failure ¹⁶⁾	Red ¹⁶⁾	Red ¹⁶⁾	⑤ 1s, 1s, 1s ...	⑥ 1s, 1s, 1s ...
Battery failure ¹⁶⁾	Red ¹⁶⁾	Red ¹⁶⁾	⑦ 1s, 1s, 1s ...	⑧ 1s, 1s, 1s ...
Charging failure ¹⁶⁾	Red ¹⁶⁾	Red ¹⁶⁾	⑨ 1s, 0.1s, 0.1s ...	⑩ 1s, 0.1s, 0.1s ...
Test ¹⁾				
Initialization ¹⁷⁾ ≥ 48h Normal	Automatic ¹⁸⁾	Automatic ¹⁸⁾	Automatic ¹⁸⁾	Automatic ¹⁸⁾
Daily check of Control LED ¹⁸⁾	Automatic ¹⁸⁾	Automatic ¹⁸⁾	Automatic ¹⁸⁾	Automatic ¹⁸⁾
Monthly/Weekly functional test ¹⁹⁾ (EN 50172)	Automatic ¹⁸⁾	Automatic ¹⁸⁾	Automatic ¹⁸⁾	Automatic ¹⁸⁾
Yearly duration test ²⁰⁾ (EN 50172)	Automatic ¹⁸⁾	Automatic ¹⁸⁾	Automatic ¹⁸⁾	Automatic ¹⁸⁾

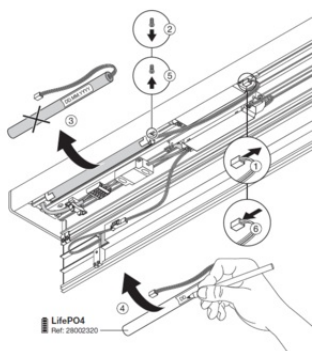

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.